

# INSTALLATION INSTRUCTIONS


For Ceiling Mount Light Fixture

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

Shut off the main power supply from the main fuse box/circuit breaker.

1. Take the light out of the package. Cut off the power, Open the 6 PCS lamp body bend 7 evenly split 360°, then use screw 1 to fix the siding 2 on the ceiling's junction Box.
2. Use the screw 5 to fix the plate 4 and the ring 4 on the screw 3 which is on the ceiling's siding.
3. Connect the wires 3 as the image 2 presented. Then use screw nut 6 to fix the plate 4 on the ceiling.
4. To 6 PCS lamp cup pipe sleeve into the lamp holder, the 6 PCS semicircle pipe bending (as shown) on both ends of the hook hook into the lamp body bent pipe hexagon nut hole in the 10;
5. Install the light source and connect the power, then the installation completed.

Fig. 1

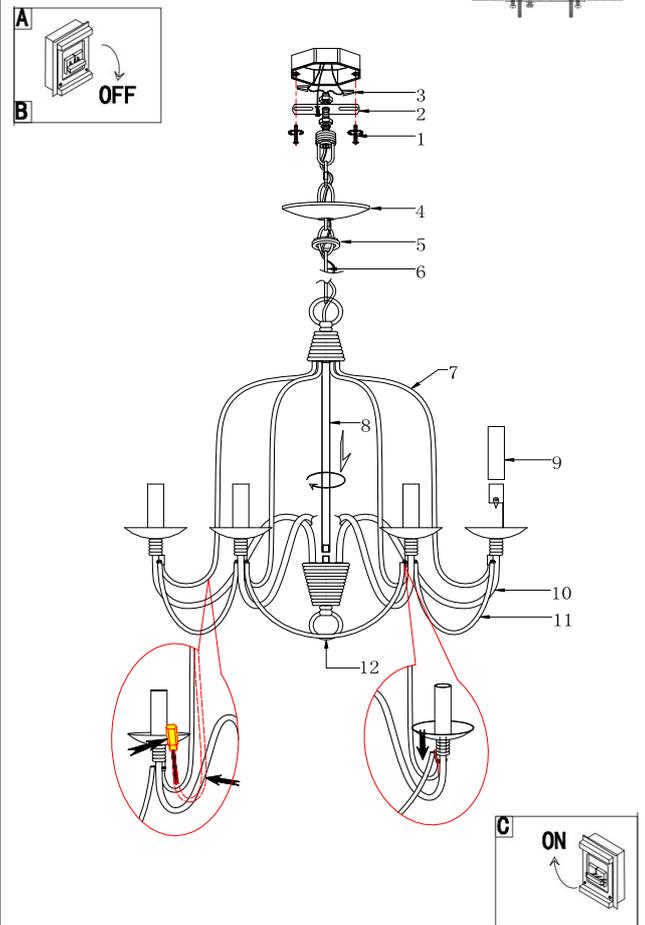

## CONNECTING THE WIRES (Fig 2)

1. Attach the power supply wires to the fixture lead wires by connecting **BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED)**.
  2. Attach the **GROUND wire (GREEN or COPPER)** from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
3. Tuck these wire connections neatly into the Junction Box.

Fig.2

