



## Components™

### Frameless pivot shower door

#### K-27589-10L

#### Features

- Frameless, 3/8" (10 mm) thick Clear tempered glass.
- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment.
- Continuous 7/8" (22 mm) high aluminum bottom threshold.
- Back-to-back 11-3/16" (284 mm) vertical shower door pulls.
- Coordinates with other products in the Components™ collection.
- CleanCoat® nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

#### Material

- Anodized aluminum hardware prevents rusting or corrosion.

#### Installation

- Fits opening widths 33-5/8"–34-3/8" (854–873 mm).
- 3/4" (19 mm) width adjustment.
- 3/8" (10 mm) out-of-plumb adjustability per side allows for simpler installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- For residential use only.
- Not for use in hospitality.

#### Included Components

Additional Components:  
Hardware kit



#### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	SHP	Bright Polished Silver
	BL	Matte Black
	BNK	Anodized Brushed Nickel

#### Available Glass Options

Code	Description
L	Crystal Clear

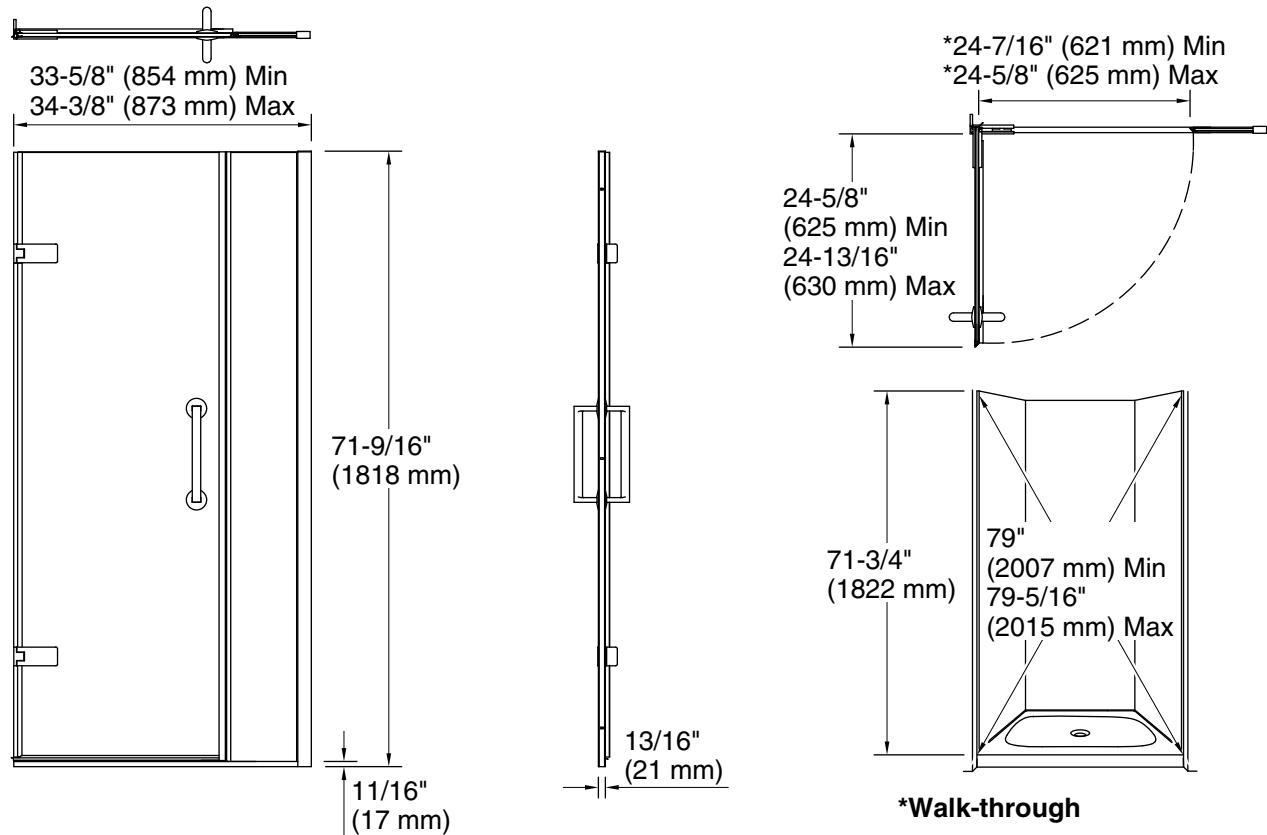

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 33-5/8" (854 mm)

Opening Width - Max: 34-3/8" (873 mm)

Walk-through - Min: 24-3/8" (619 mm)

Walk-through - Max: 24-5/8" (625 mm)

Base-To-Wall Radius 1/4" (6 mm)

– Max:

Glass thickness: 3/8" (10 mm)

Glass coating: CleanCoat®

### Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 73-1/2" (1867 mm) to allow for installation clearance.