

Features

- Acrylic
- Integral soap ledges.
- Brushed stainless steel grab bars.
- Fold-up seat on left side.
- Molded-in floor pattern.
- "Pit" installation options detailed in instructions.
- 36" (914 mm) x 36" (914 mm) x 81-3/8" (2067 mm) inside finished dimensions.
- 45" (1143 mm) with flange x 37-1/4" (946 mm) x 84" (2134 mm) overall product dimensions.



ADA

Codes/Standards




CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
ADA
ICC/ANSI A117.1




KOHLER® One-Year Limited Warranty




See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

*Recess opening must be 45-1/4" (1149 mm) x 84-1/4" (2140 mm).	
	Represents control area for faucets
	Represents 24" (610 mm) wall mount slide bar.
 36" (914 mm) 48" (1219 mm)	Represents clear floor space for 36" (914 mm) x 48" (1219 mm).

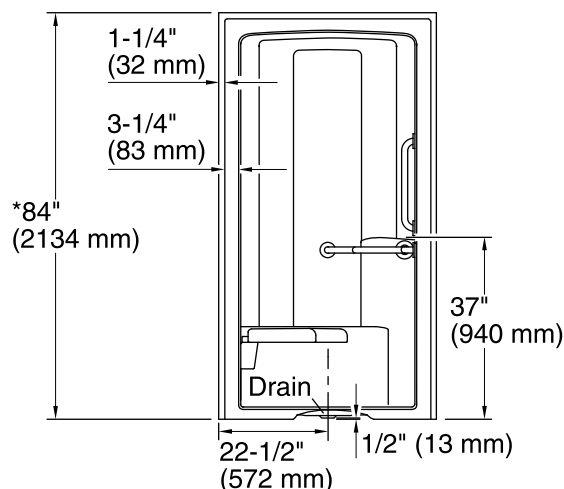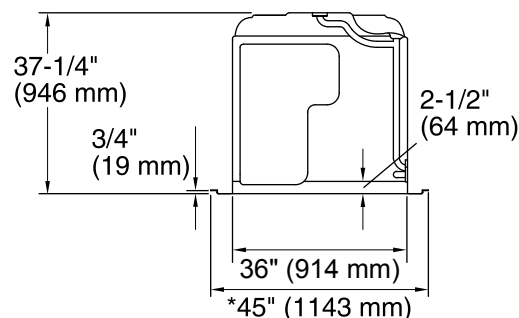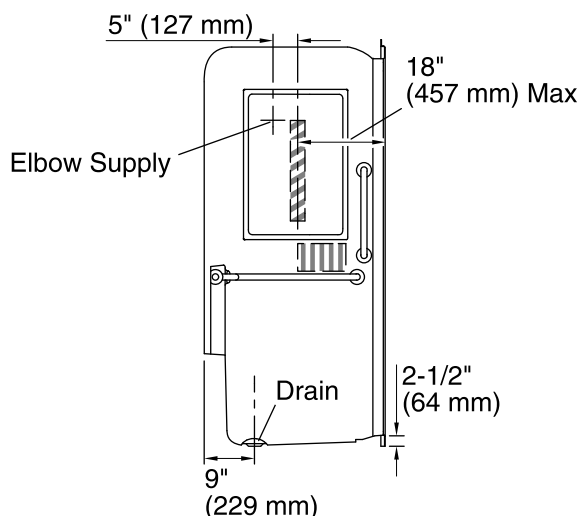

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Center rear

Weight: 170 lbs (77.1 kg)

Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

For optimum accessibility, specify faucets and fittings to install and operate within the control area shown.

For increased accessibility, utilize "pit" installation as detailed in installation guide.

The fixture is not drilled for supply fittings.

Shimming may be required to level the fixture.

Stud opening tolerance + 1/4" (6 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

Some shimming between stud frame and fixture may be required.

ADA compliant when installed to the specific requirements of these regulations.