



# Buckley™ | K-TS35938-4Y

Rite-Temp® shower trim kit, 2.5 gpm

## Features

- Single-function 2.5 gpm (9.5 lpm) showerhead
- A single handle controls both on/off activation and temperature setting
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Box includes: Showerhead, shower arm and flange, faceplate with lever handle
- Coordinates with other products in the Buckley collection



## Available Colors/Finishes

*Color tiles intended for reference only.*

|    |                        |
|----|------------------------|
| CP | Polished Chrome        |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black            |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 05:42 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992

---

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/Type:                      Lever

### Flow Rate

Shower/Rainhead Rated              2.5 gpm (9.5 l/min)

Maximum Flow:

Handshower Rated Maximum      2.5 gpm (9.5 l/min)

Flow:

---

## Valves

Required Valve:                      Pressure Balance

---

## Material


- Premium material construction with metal handle ensures reliability and durability
  - KOHLER finishes resist corrosion and tarnishing
- 

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



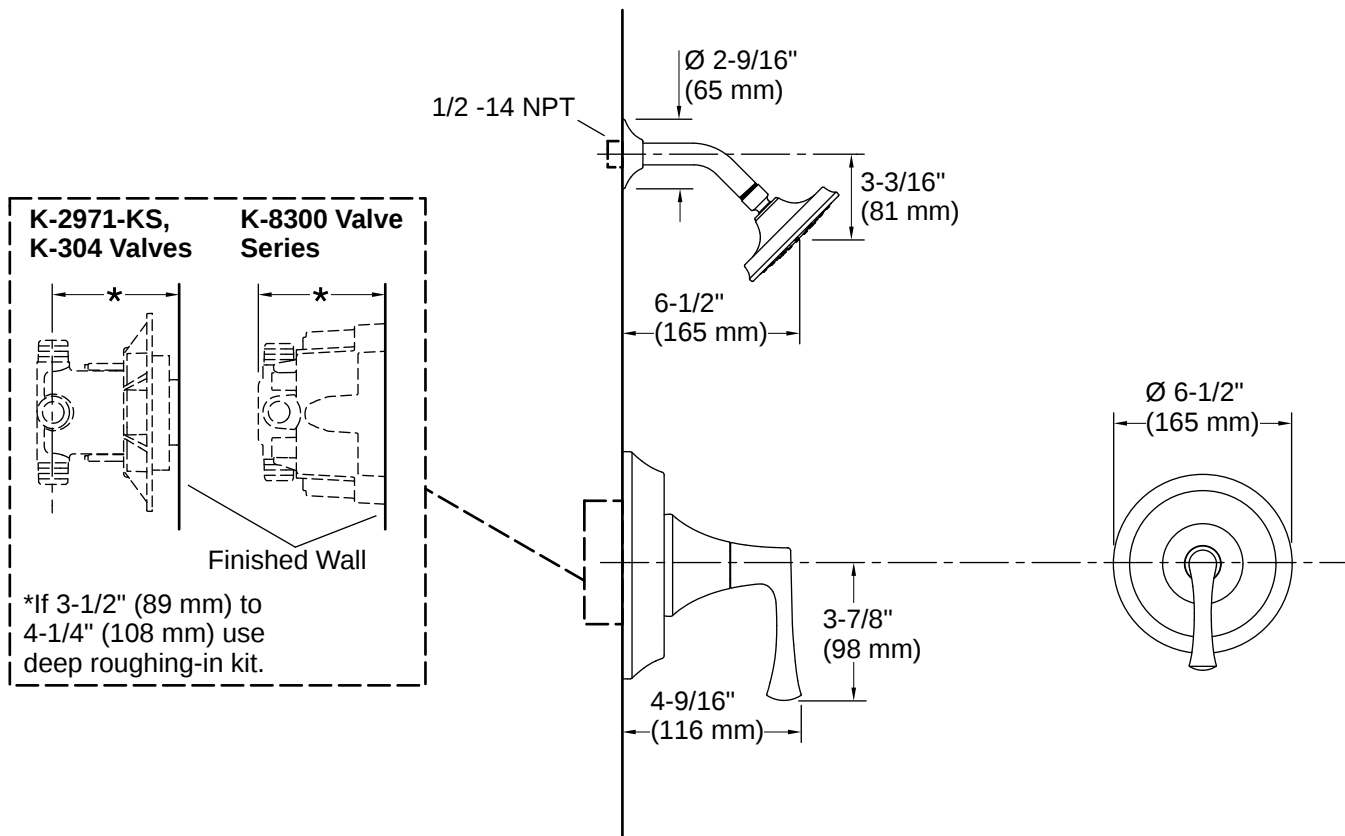

## Installation

- Trim only; requires valve to complete installation (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Install the product according to the installation guide.

**NOTICE:** Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 05:42 - US-CA

THE BOLD LOOK  
OF **KOHLER**