

Project:

Fixture Type:

Location:

Contact:

LED Ceiling Mount • Damp Location



Specifications:

Description:

These outdoor sconces are ideal for a wide variety of interior and exterior applications including residential and commercial. The Cylinders feature a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits.

Construction:

- Powdercoated Antique Bronze , White, Black, Metallic Gray
- Die-cast aluminum construction
- Flicker-free dimming to 10% brightness with most ELV type dimmers (See Dimming Notes)
- Covers a standard 4" recessed outlet box
- Mounting strap for outlet box included


Performance:

Number of Modules	1
Input Power	29W
Input Voltage	120V
Input Frequency	60Hz
Lumens/LPW	2000/68 (LM-79)
CCT	3000K
CRI	90
Life	60,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-30° C
Max. Operating Temp	30° C
Warranty	5 yrs.
Labels	cCSAus certified for damp locations

Images:



Dimensions:

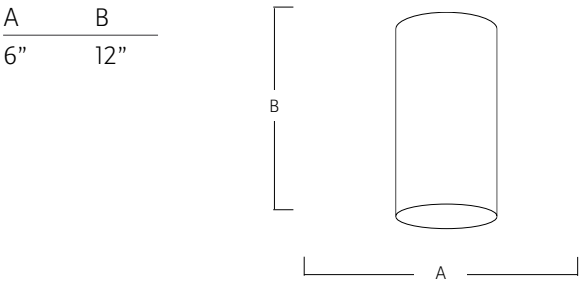

Catalog number:

Finish	Color Temp	CRI
Antique Bronze	3000K	90 CRI
White		
Black		
Metallic Gray		



### Dimming Notes:

---

This collection is designed to be compatible with many Electronic Low Voltage (ELV-Reverse Phase) controls. The following is a partial list of known compatible dimmer controls:

#### Electronic Low Voltage ELV Reverse Phase Controls

Lutron	Diva Series	(Part Number DVELV-300)
Lutron	Nova T Series	(Part Number NTELV-300)
Lutron	Vierti Series	(Part Number VTELV-600)
Lutron		(Part Number MAELV-600)
Lutron		(Part Number SPELV-600)
Leviton		(Part Number AWRMG-EAW)

Digital type dimmers are not recommended.

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.