


Installation & Assembly

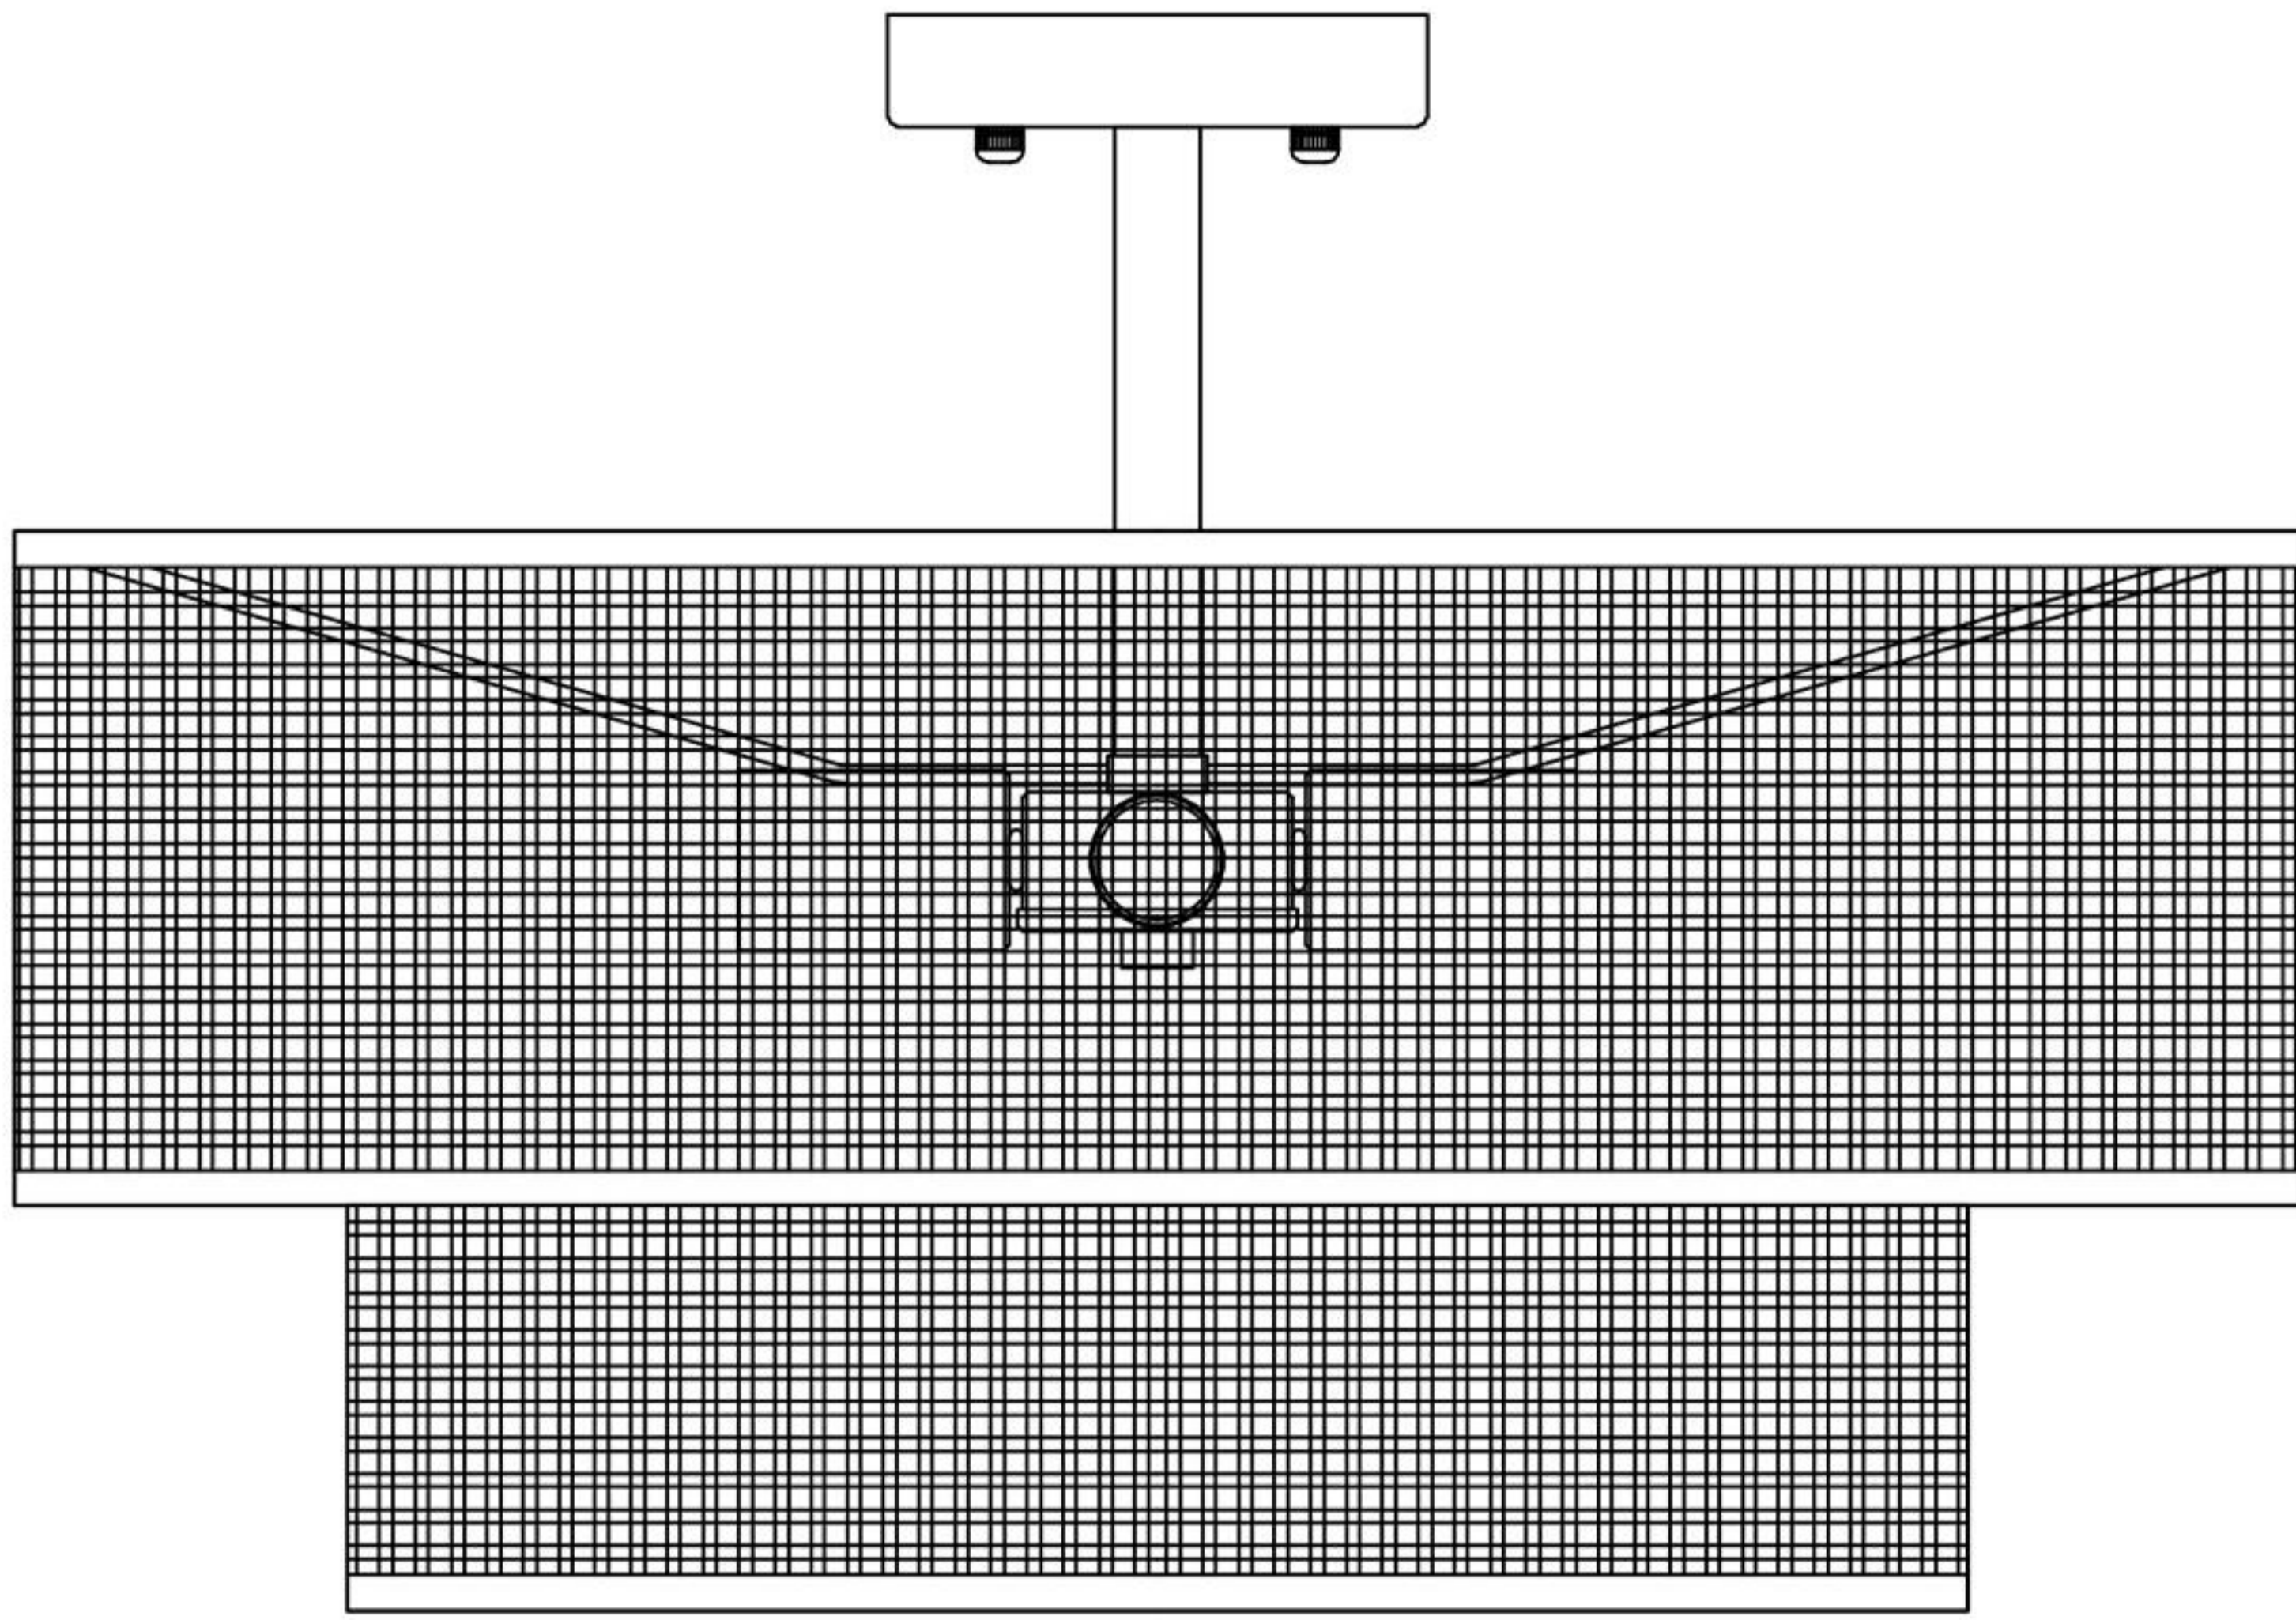

PRODUCT PARAMETERS

MOUNTING TYPE	Semi- Flush Mount
BULB TYPE	E26 Bulb*4
VOLTAGE	120 Volts (AC)
BODY FINISH	Quality Rattan
DIMMABLE	Yes
LOCATION	Damp and Dry Location
BULBS	Bulb Not Included

WARRANTY

The manufacturer warrants all of its lighting fixtures against defects in materials and workmanship for one year from the date of purchase. If within this period the product is found to be defective in material or workmanship, or glass shade broken/cracked feel free to follow the steps to CONTACT US

Installation Illustration



CAUTION: TURN OFF POWER
BEFORE INSTALLTION

Step 1: Thread the wires through the downrod.

Step 2: Secure the canopy to the downrod by tightening it.

Step 3: Attach the mounting plate to the ceiling electrical box using screws.


Step 4: Tighten the screws on the mounting plate to secure it firmly.

Step 5: Connect the wires from the fixture to the ceiling power wires using wire connectors.

Step 6: Attach the fixture body to the mounting plate and secure it tightly.

Step 7: Tighten all screws on the fixture to ensure stability.

Step 8: Screw in the light bulb. (bulb not included)

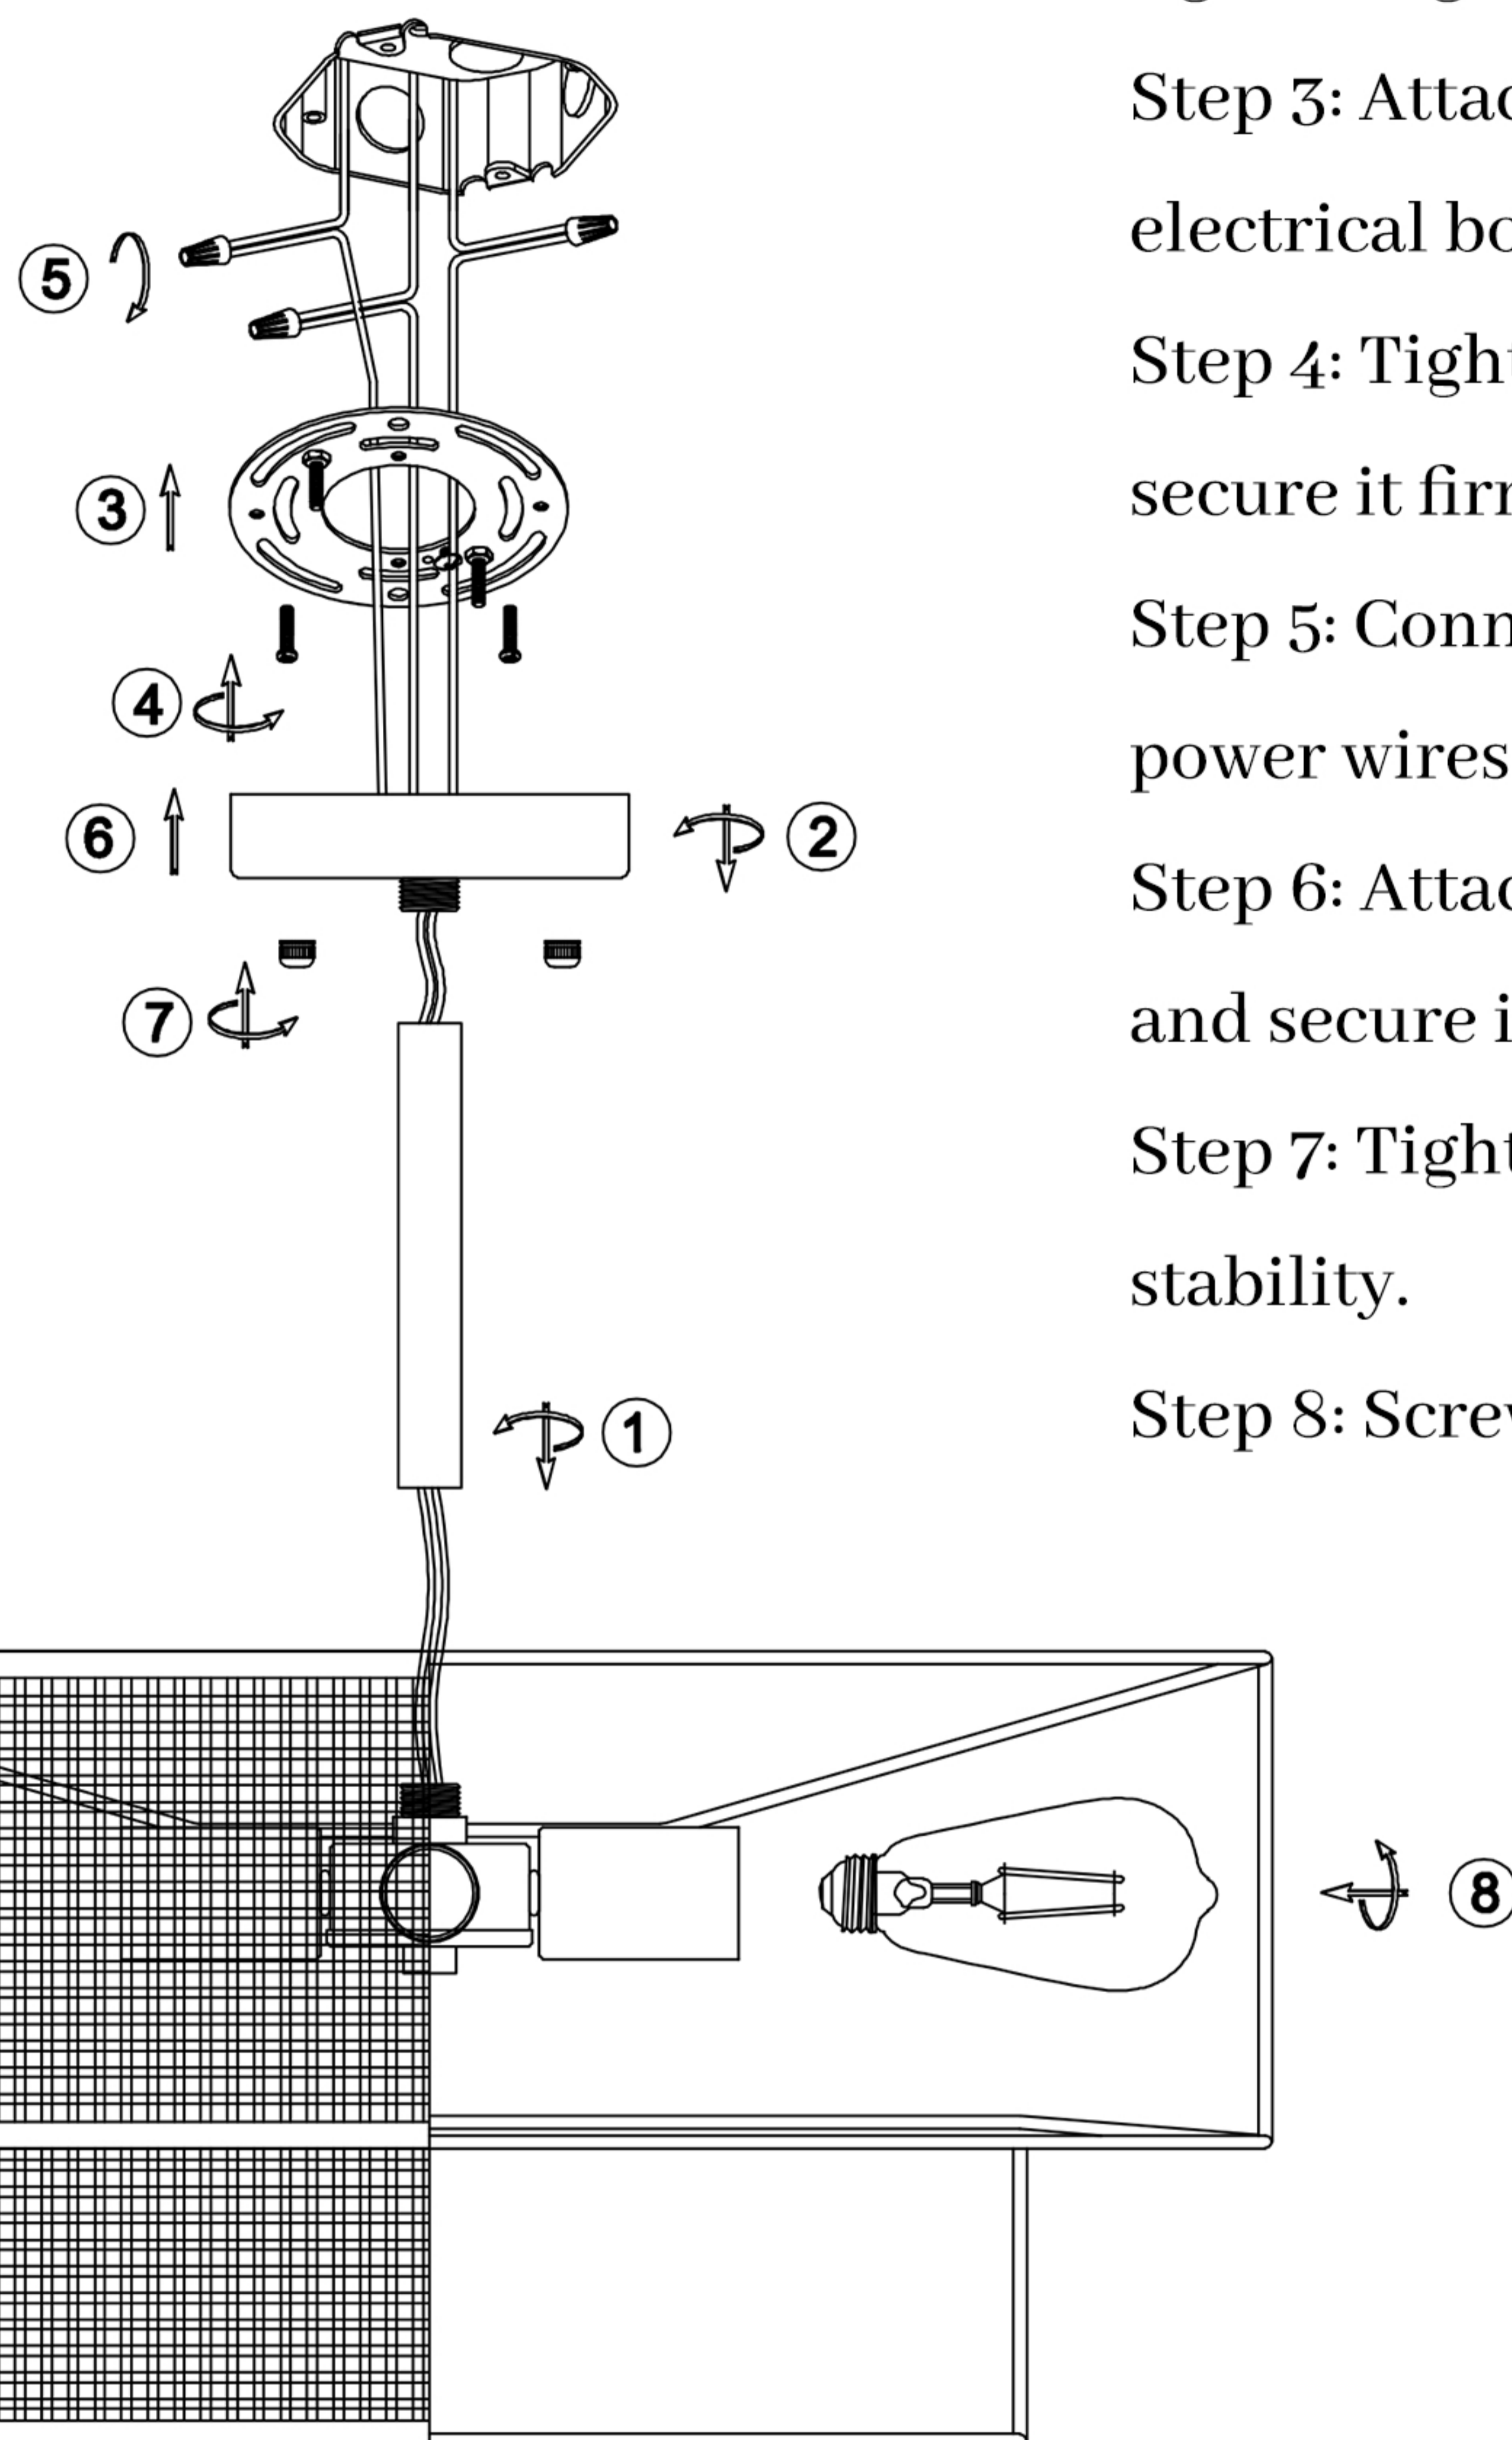

IMPORTANT: READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. LED Retrofit Kit installation requires knowledge of luminaire electrical systems. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

CAUTION

- Turn off power before changing lamp.
- Use only on 110-120 volts circuits.
- Risk of electric shock- do not use where directly exposed to water.
- Not suitable for totally enclosed fixtures. Not intended for use with emergency exit lamp or fixture.
- Do not use this fixture close to any source of heat.
- Place the device out of reach from children under 3 years old."