
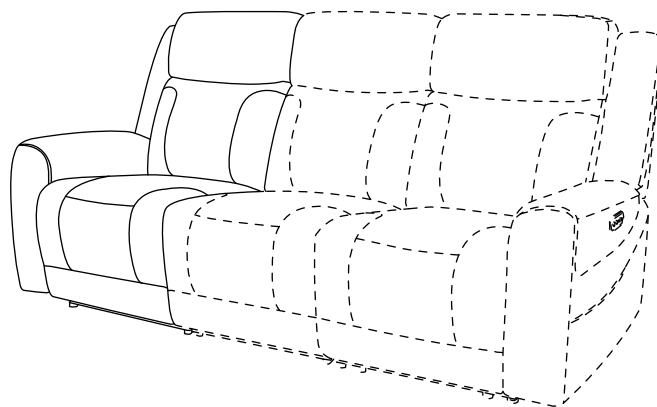






Power Left Chair **Assembly Manual**

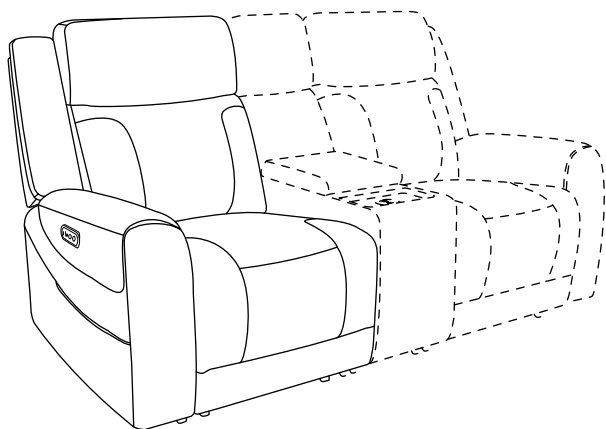


CAUTION

THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.
PLEASE READ AND KEEP FOR FUTURE REFERENCE.


Parts

A-L  Back	B-L  Left Armrest	C-L  Seat
D-L  Left Wing	E  Power Supply	F  Cup holder


Before you begin: Locate the Power Supply (E) at the bottom of Power Left Chair Seat.

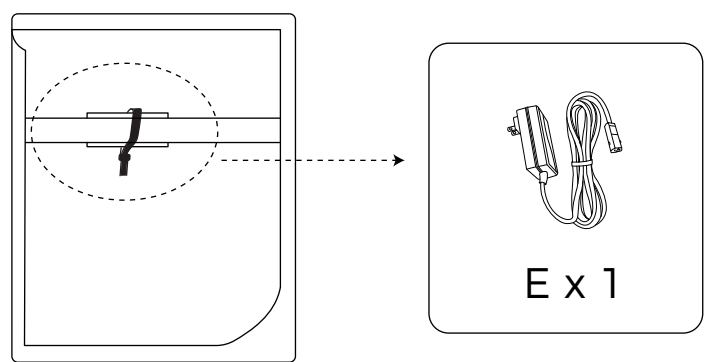


Step 1: Slide the Left Armrest (B-L) into the Seat (C-L). Push down the Left Armrest (B-L) firmly until it is locked into place.

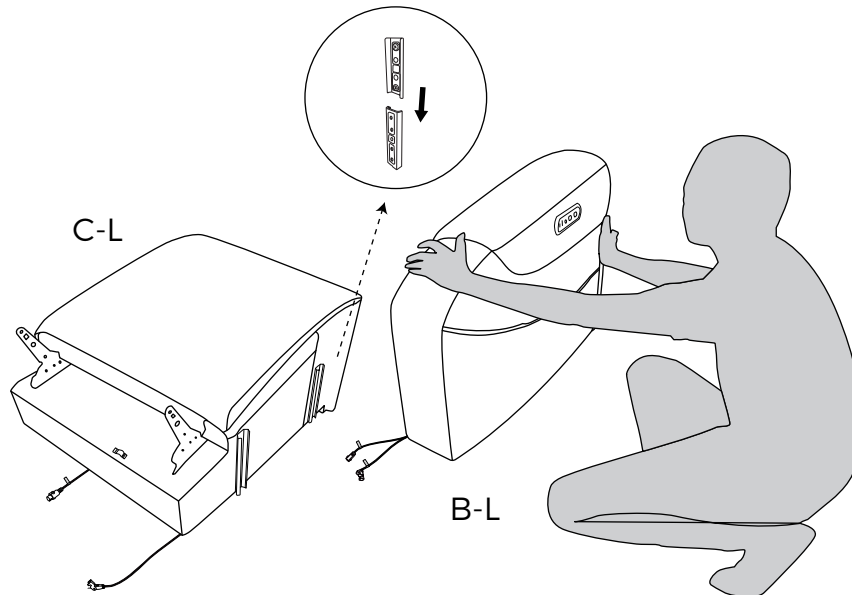


Step 2: Zip up the Back (A-L) and the Seat (C-L) together.

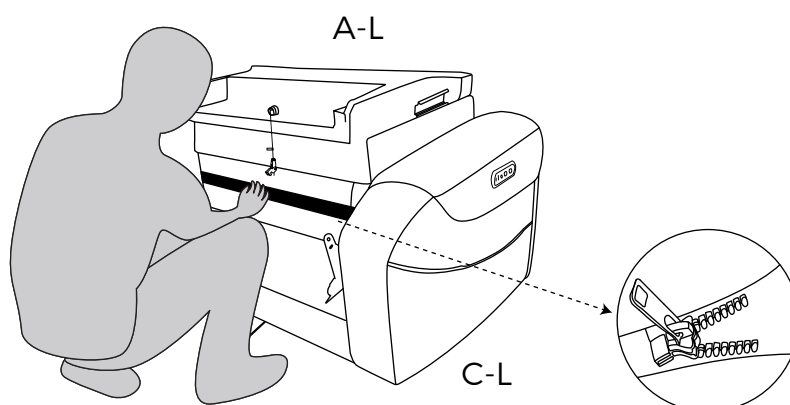


Step 3: Slide the Back (A-L) into the metallic quick connectors of the Seat (C-L). Push down the Back (A-L) firmly until each side is locked into place and an audible “click” is heard.

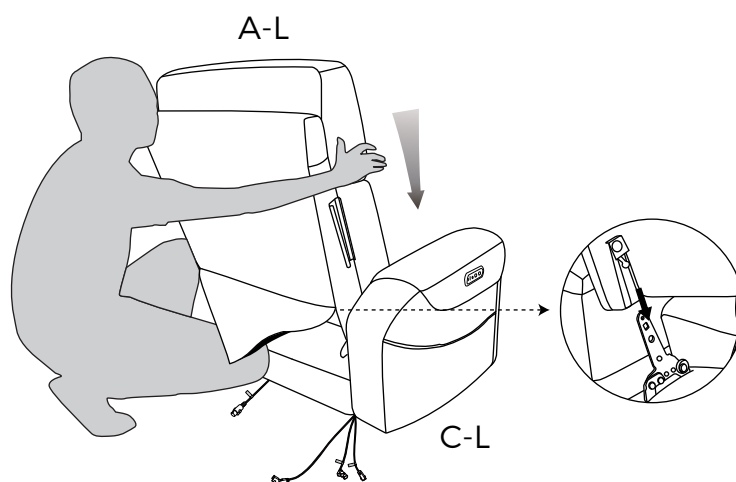


4. Connect the Headrest cable into the Headrest cable. Connect the Footrest cable into the Footrest cable. Locate the Power Supply (E) and connect to its corresponding receiver on the base of the Seat (C-L).

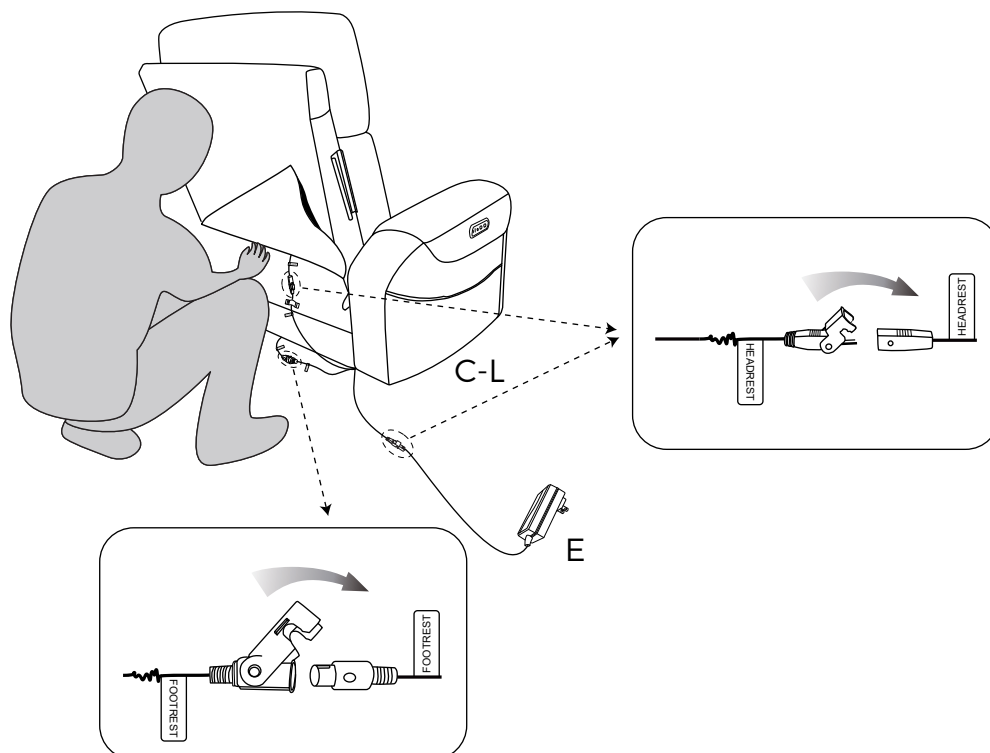

Step 5: Slide the the Left Wing (D-L) into the Back (A-L).

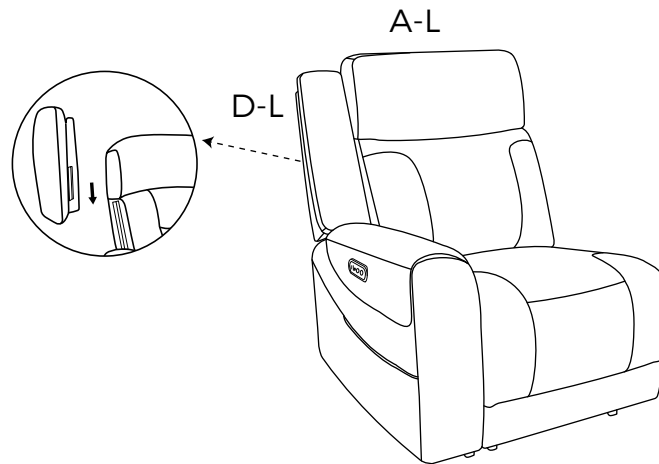



Step 6: Attach the back cover to the bottom of the Seat (C-L) with Velcro.

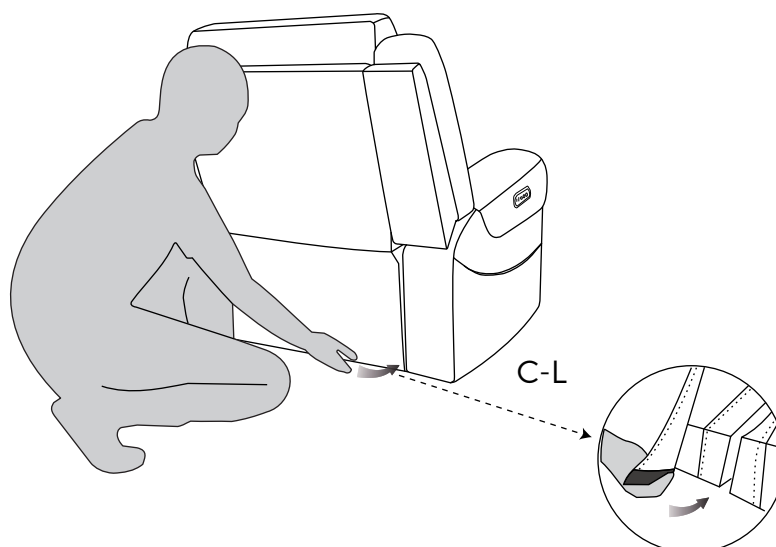

Step 7: Open the front side of the armrest and install the cup holder (F) .


Attention: When installing the cup holder, please make sure to push it all the way in with force. When the cup holder is in a loose state, it may get stuck in the front baffle, causing the armrest to fail to open and close properly.

Then open it when you need to use it and close it when you don't.

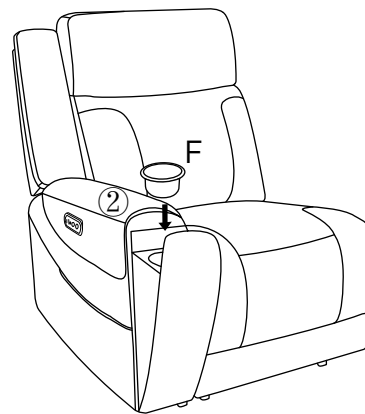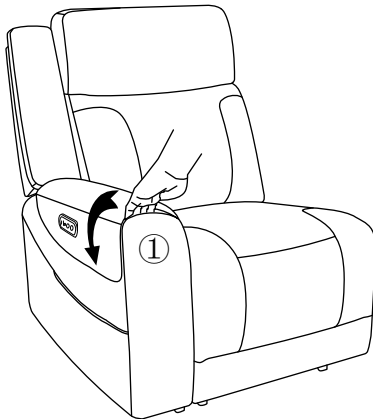

How to Connect

Step 1: Attach each piece with brackets on the side. Kindly note to attach from Right hand to Left hand.

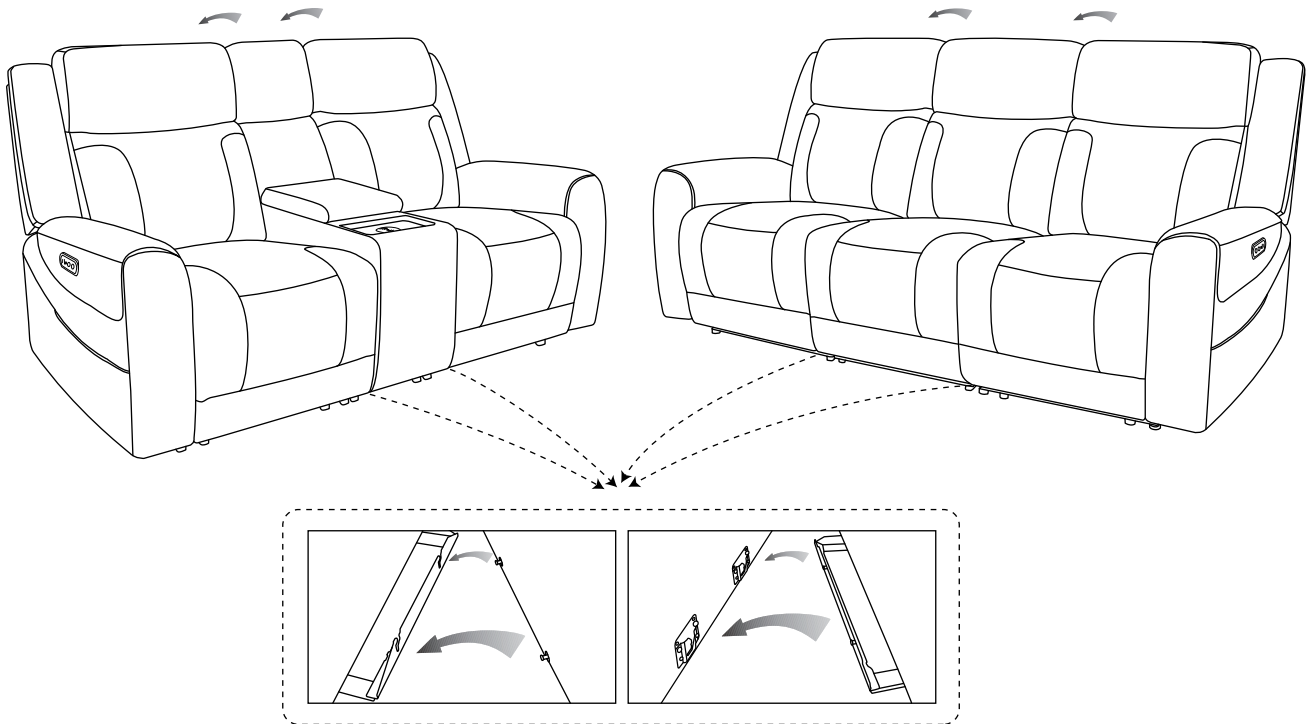

Step 2: Using 2-Y cable (from Console parts) to connect your Console and Power Left Recliner together. Plug the Power Supply into the power outlet.

