
## **ASSEMBLY AND INSTALLATION INSTRUCTIONS**

# ARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. READ AND SAVE THESE INSTRUCTIONS.

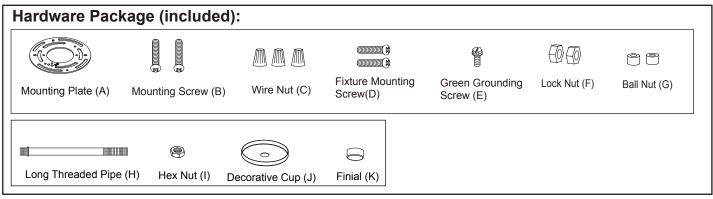

#### Installation Steps

#### Turn off the power at fuse or circuit box

- 1. Thread the fixture mounting screws through mounting plate, and then secure them with two lock nuts. Adjust the length of fixture mounting screws if necessary.
- 2. Attach mounting plate to the outlet box using two mounting screws.
- 3. Thread the fixture wire through the tube and the canopy.
- 4. Attach one end of the tube to the canopy, and the other end to the threaded pipe of the fixture.
- 5. Attach the long threaded pipe to coupling.
- 6. Slip the plastic plate and decorative cup up through the long threaded pipe, and then secure them with the finial.

NOTE: The depth of hex nut in long threaded pipe may need to be adjusted to properly fit the plastic plate. The plastic plate should be flatly laid on three brackets, and the frosting of the plastic plate should be faced down.

- 7. Install bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
- 8. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:


  - grounding screw, and then connect it to the house grounding wire with the wire nut.

---Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source. ---Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source. ---Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting plate with the green Carefully put the wires back into the outlet box.

Bulb Type A Max.60W

(not included)

Frosting



Coupling

Socket

Long Threaded Pipe (H)

Decorative Cup (J)

Hex Nut (I)

Finial (K)

Fabric Shade

Bracket

Plastic Plate

m

9. Attach the canopy to the mounting plate by inserting the fixture mounting screws, and then secure it with two ball nuts.

Turn on the power at fuse or circuit box

### The following parts are available for re-order if damaged or missing.

