


97148 Product Installation Instructions

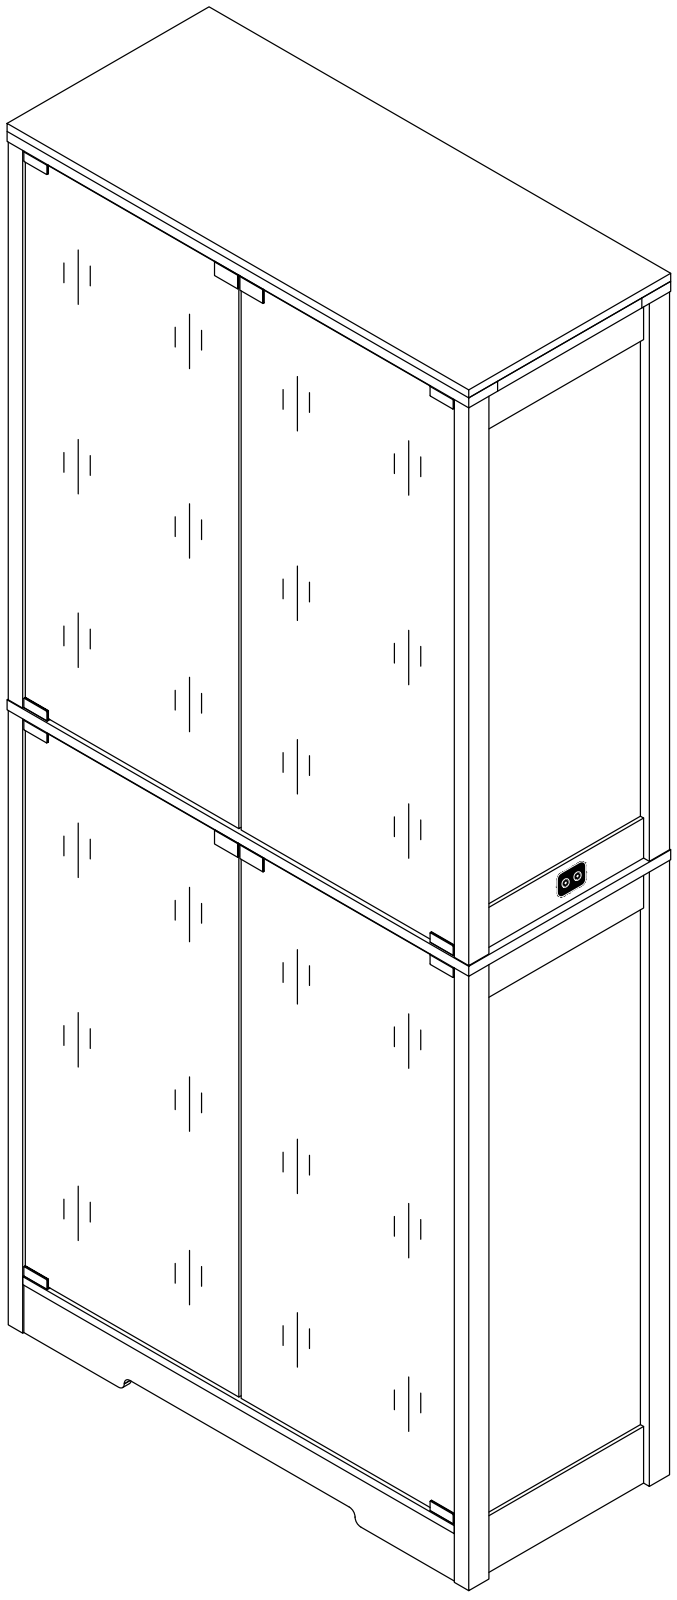


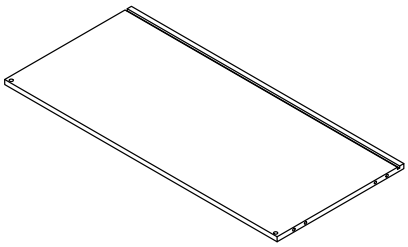


Ax1




Bx1




Cx1




Dx1




Ex1

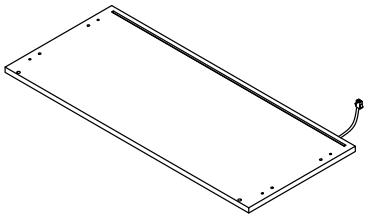


Fx1




Gx1

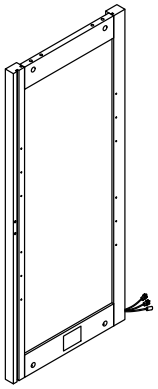


Hx1




Ix6




Jx2

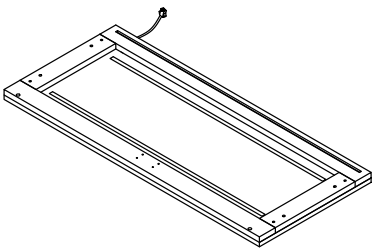

Kx1













Lx4




Mx4

Accessories list

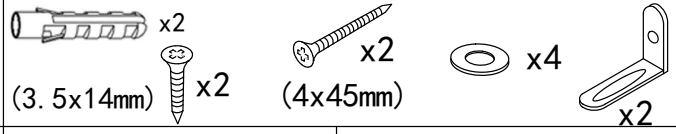
1		Two in one screw (6x28mm)	30pcs +4pcs
2		Two in one nut (10x12mm)	30pcs +4pcs
3		Wood chipping (6x30mm)	16pcs +4pcs
4		Non-slip pads (50x2mm)	6pcs +2pcs
5		Backboard card strip(746mm)	4pcs
6		Fixing clip & screw (3x16mm)	24pcs +2pcs
7		Wire clamp	2pcs +1pcs
8		Laminate support nail	16pcs +1pcs
9		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Rubber ring	8pcs
		Iron sheet & Hinge	4pcs
10		Screw (5x40mm)	8pcs +1pcs
11		Anti Fall Hardware	1pcs
12		round decorative stickers	8pcs +4pcs
		AC/DC Adapter (12V⎓3.0A)	1pcs

Double-head screwdriver, use as required

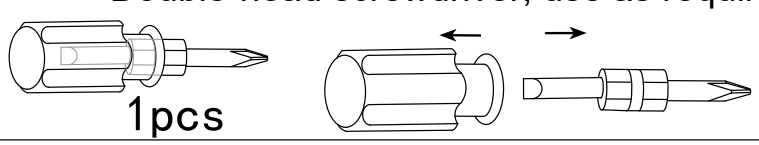


1pcs

Product structure decomposition

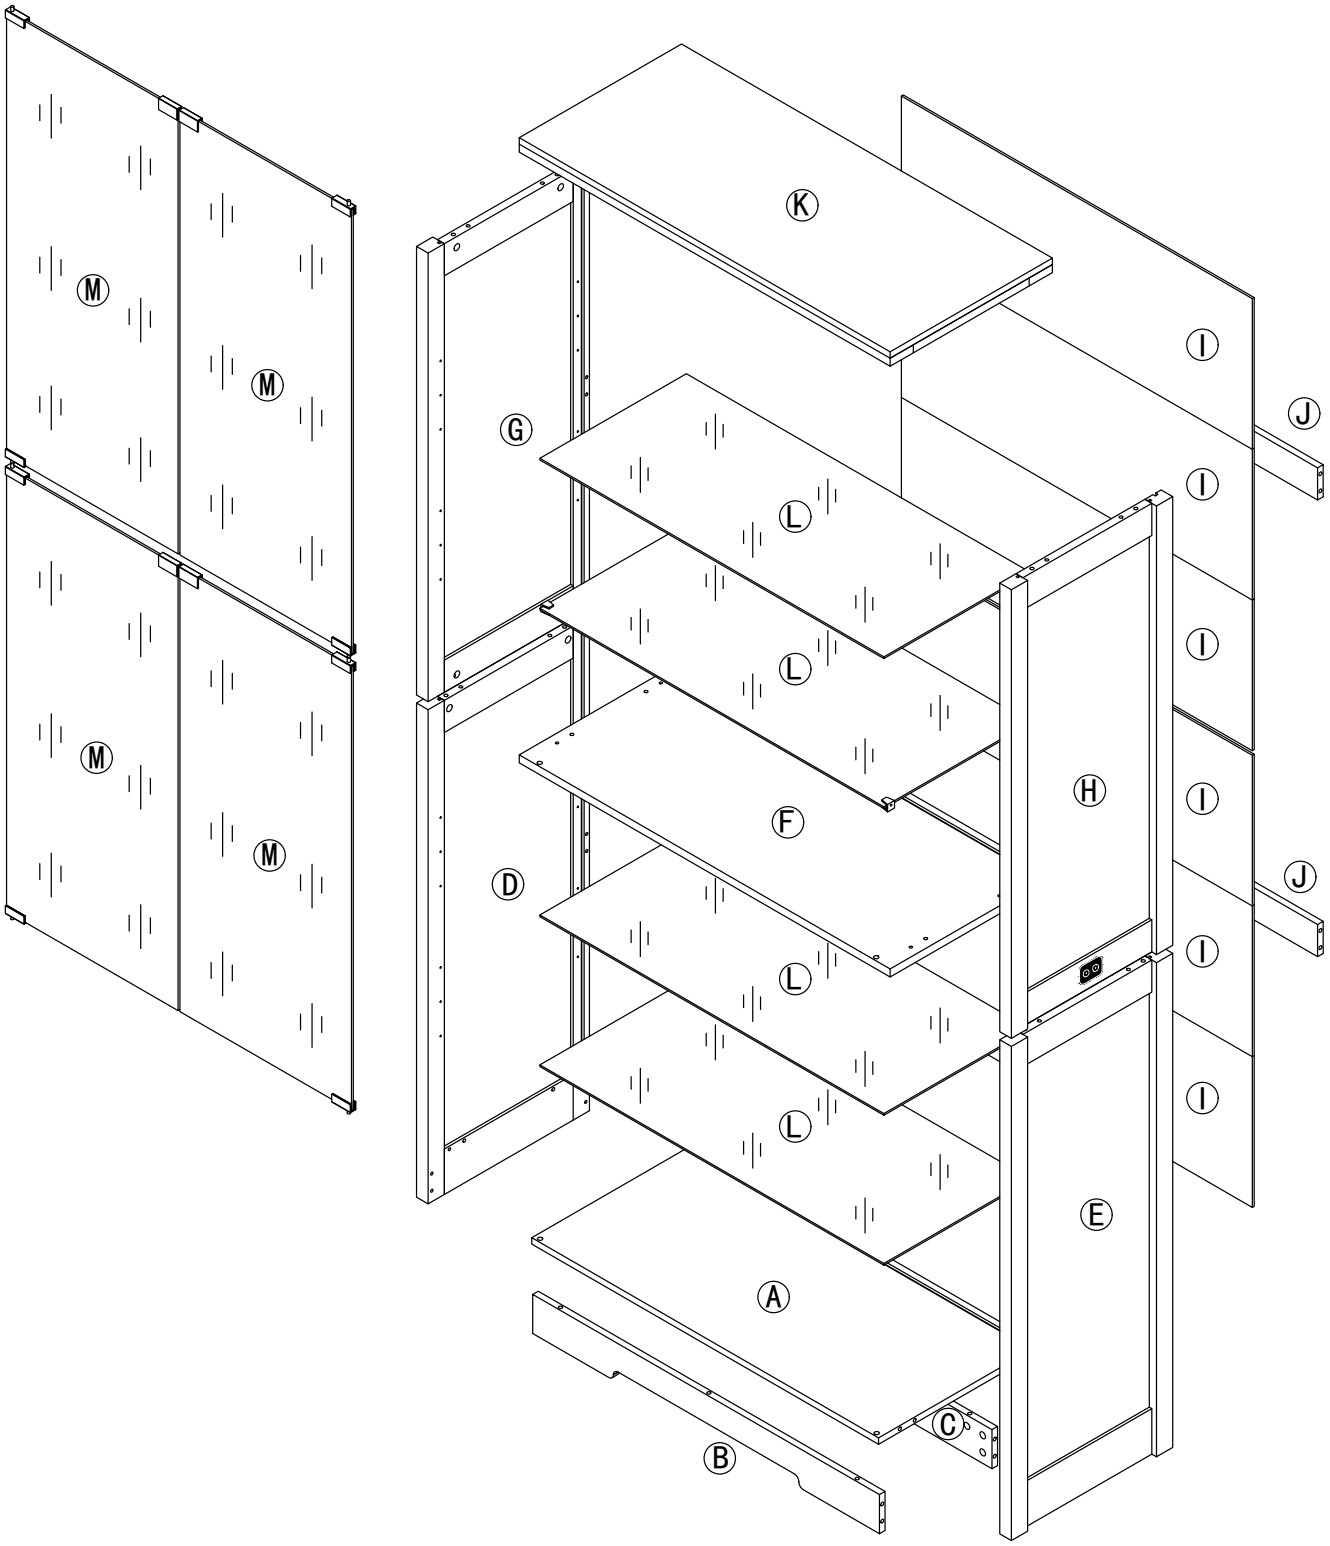


Use parts ① and ②


Step1

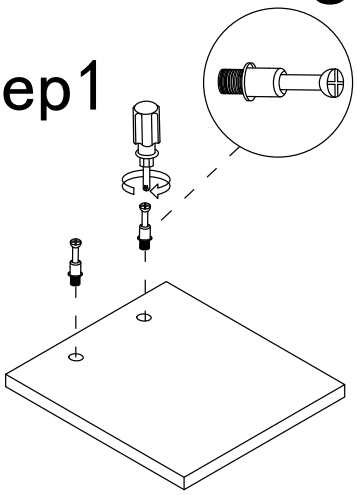


Step2

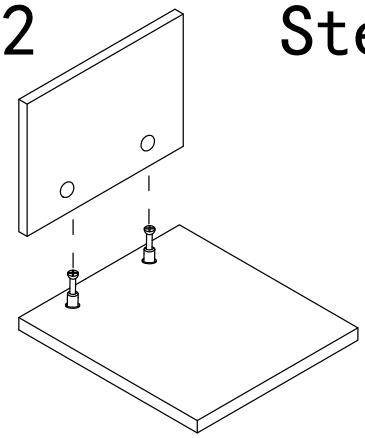


Step3

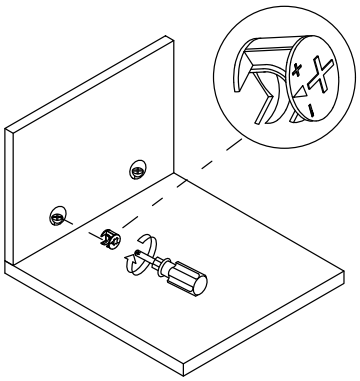

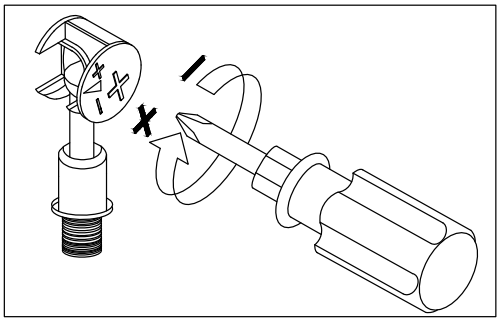



Use a screwdriver to lock in the direction of the "+" sign

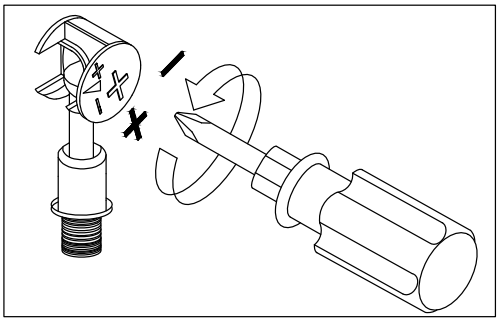


Disassemble along the direction of "-" sign

Step 1



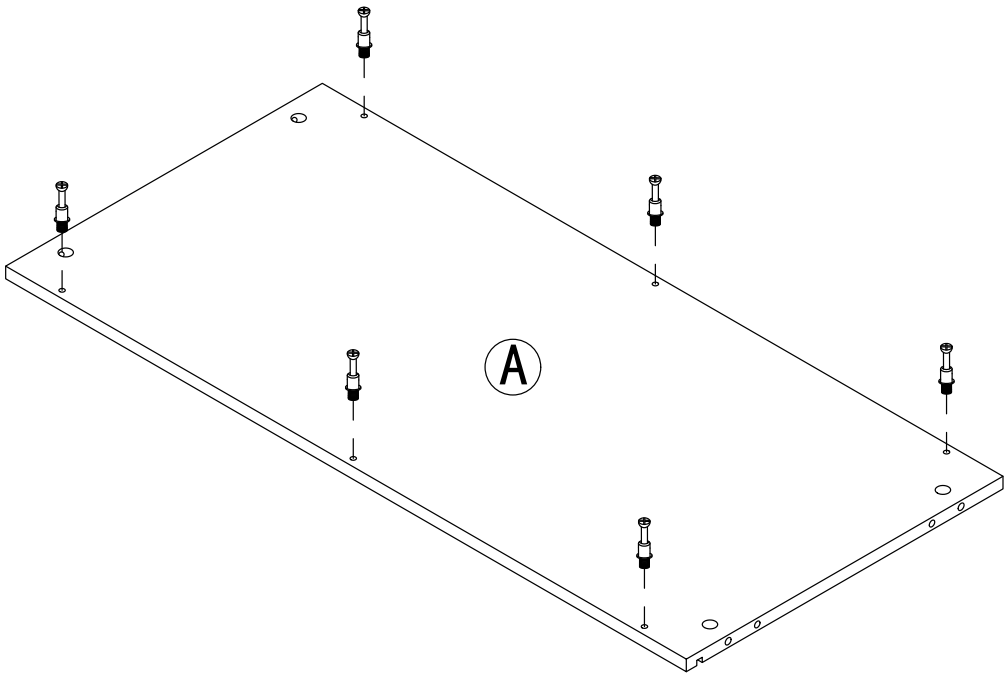


Step 2

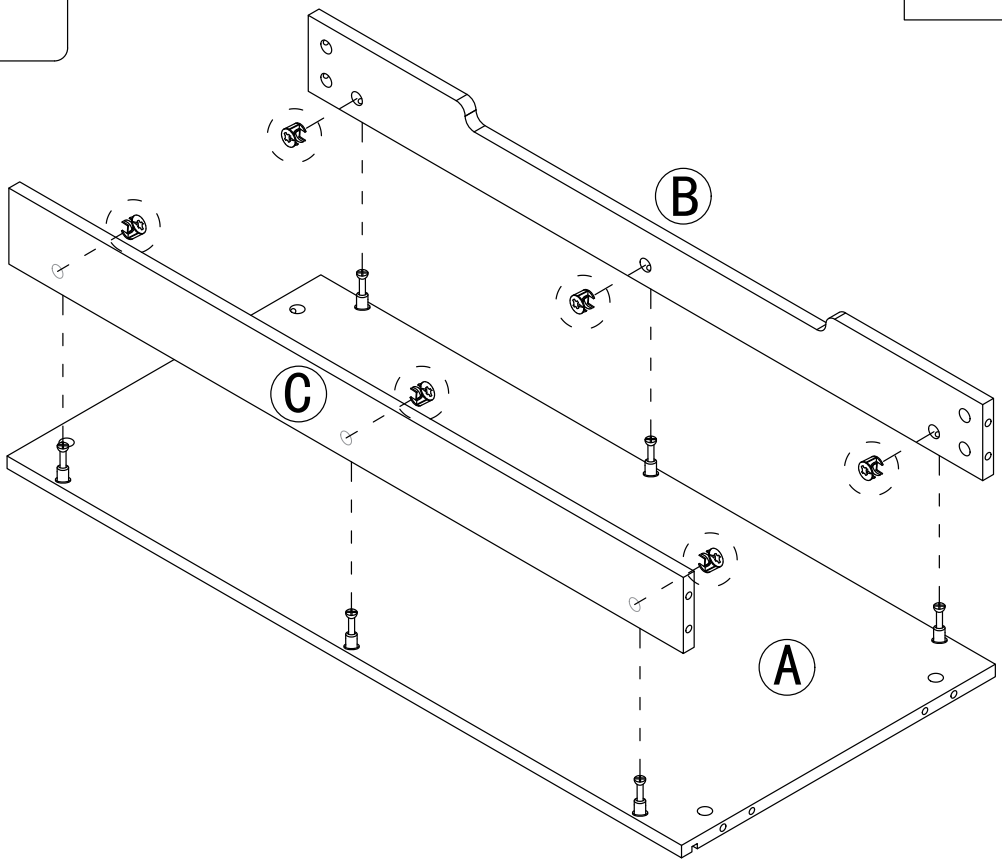

2 x6


Step 3

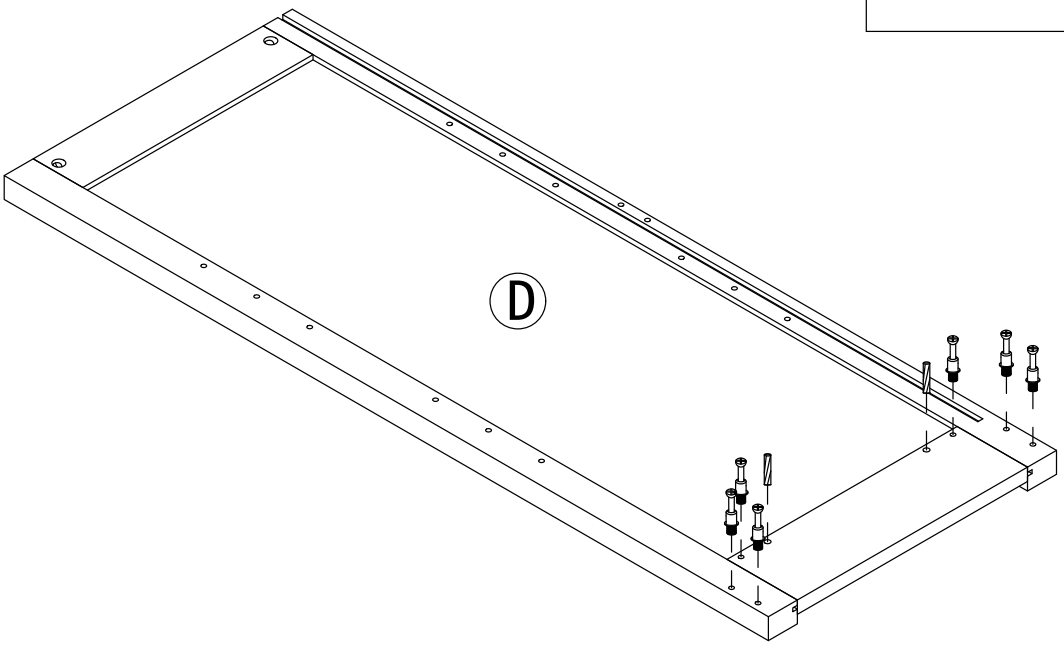


1 x6


3 x2


Step 4



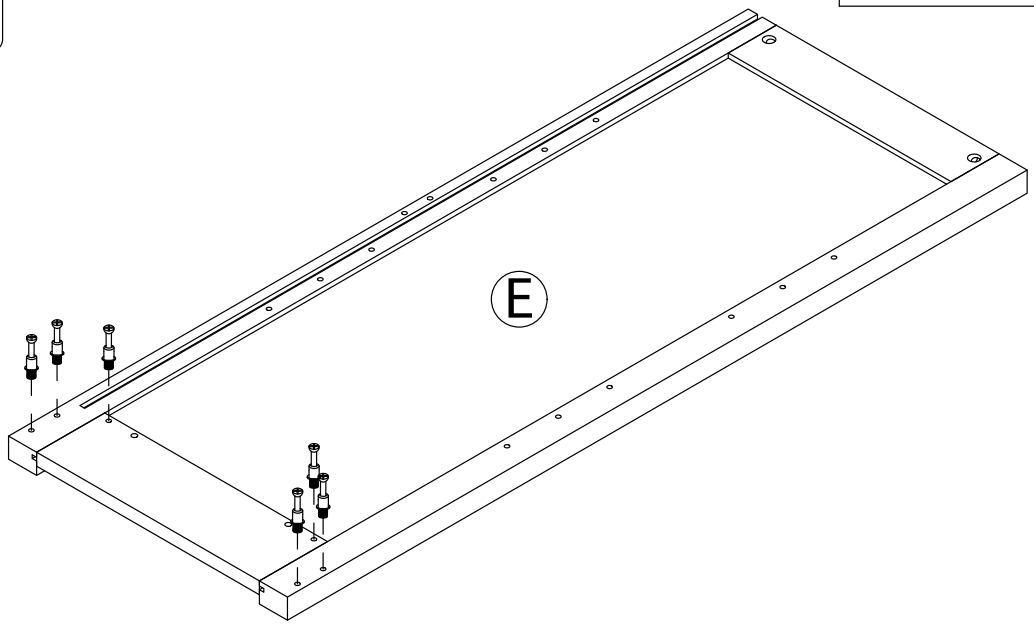


Step 5



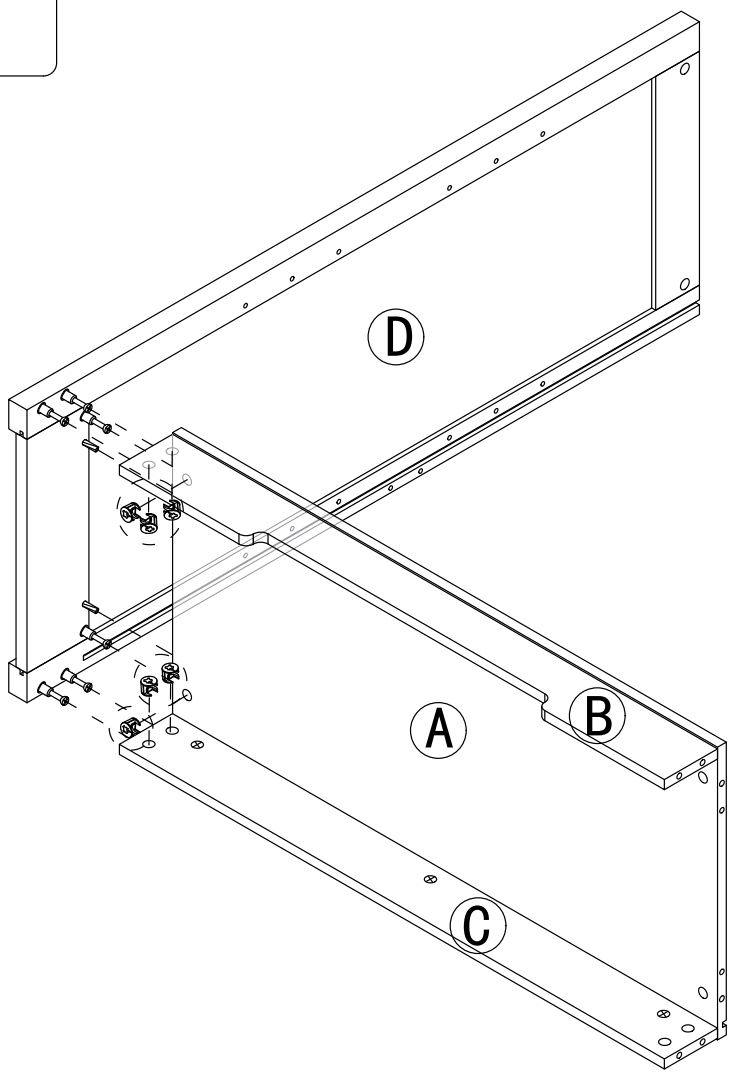


Step 6

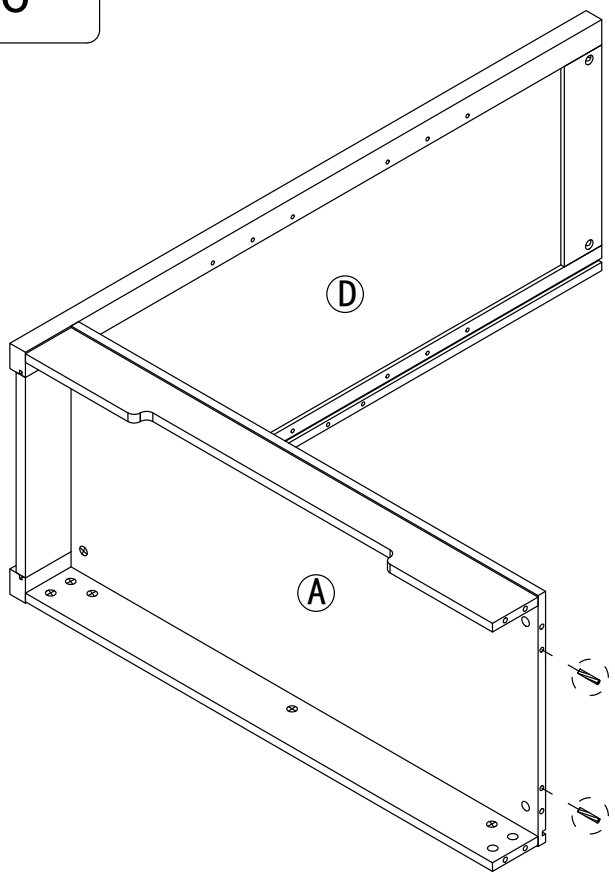


3 x2


Step 7

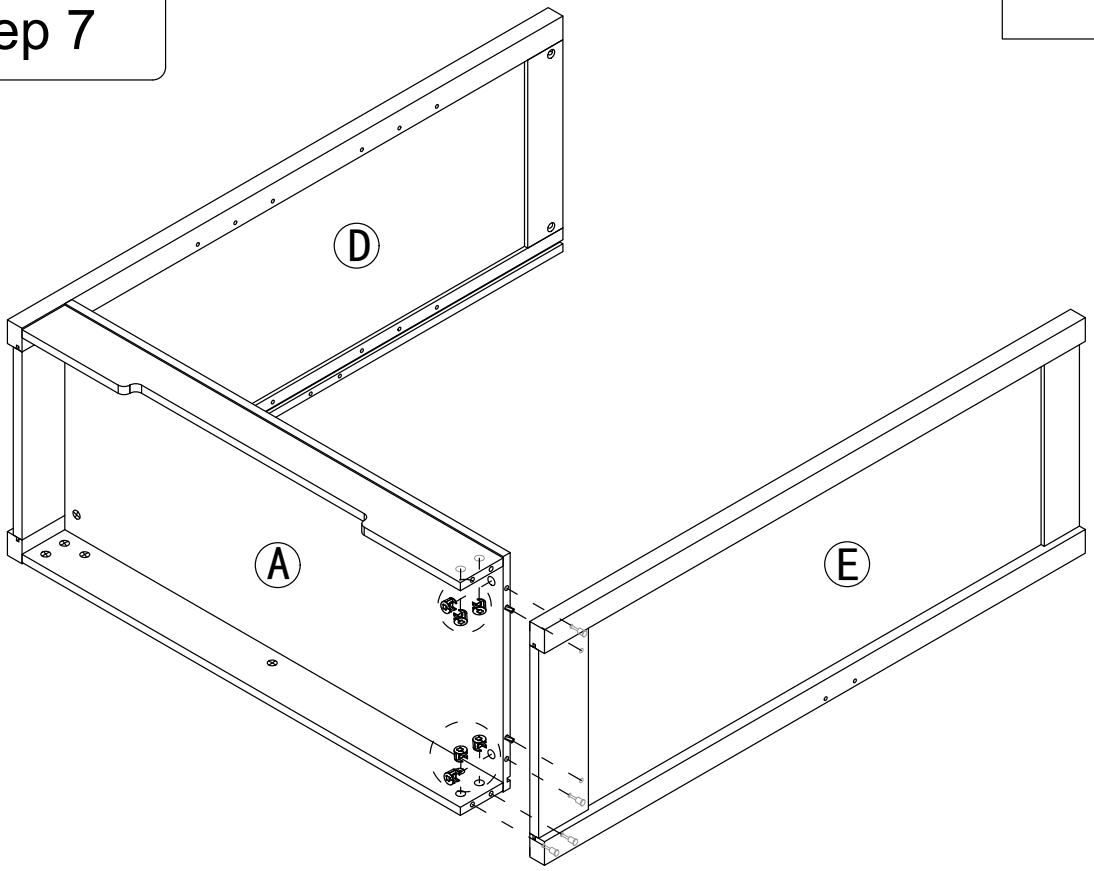

2 x6

Step 8

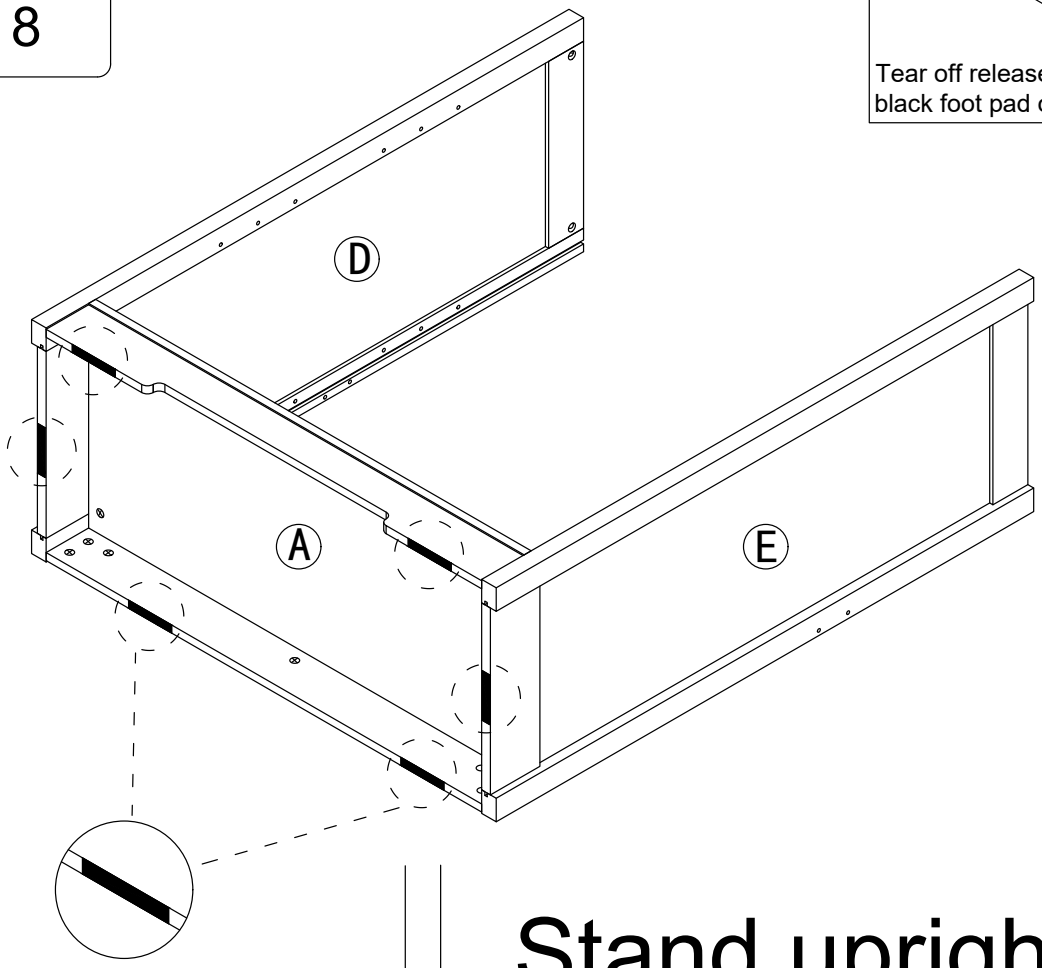


④  x6

Tear off release paper and stick the black foot pad on the board


Stand upright

Step 9

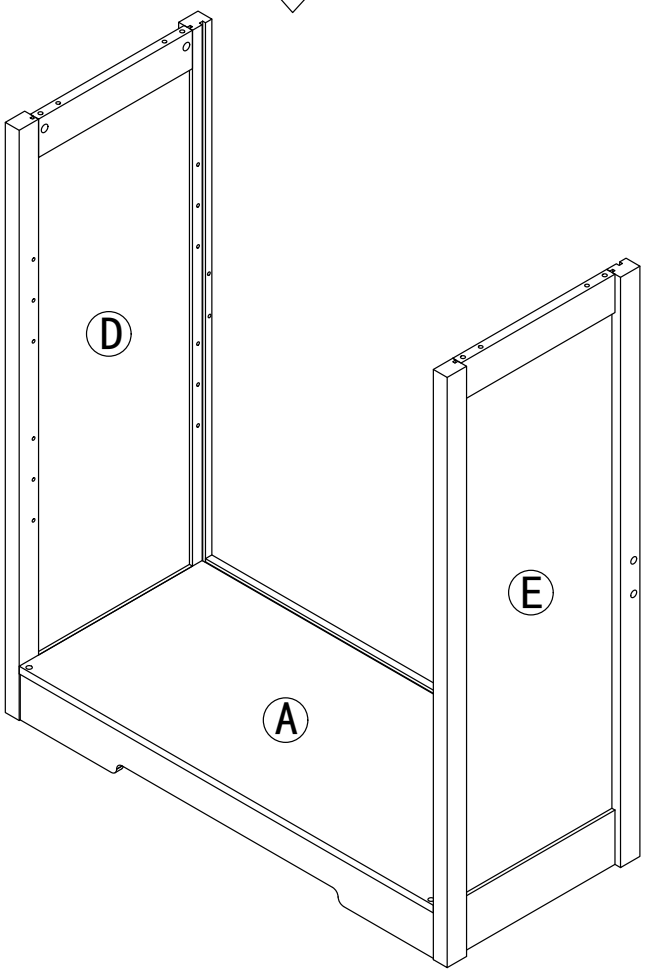


Step 10

10 x4

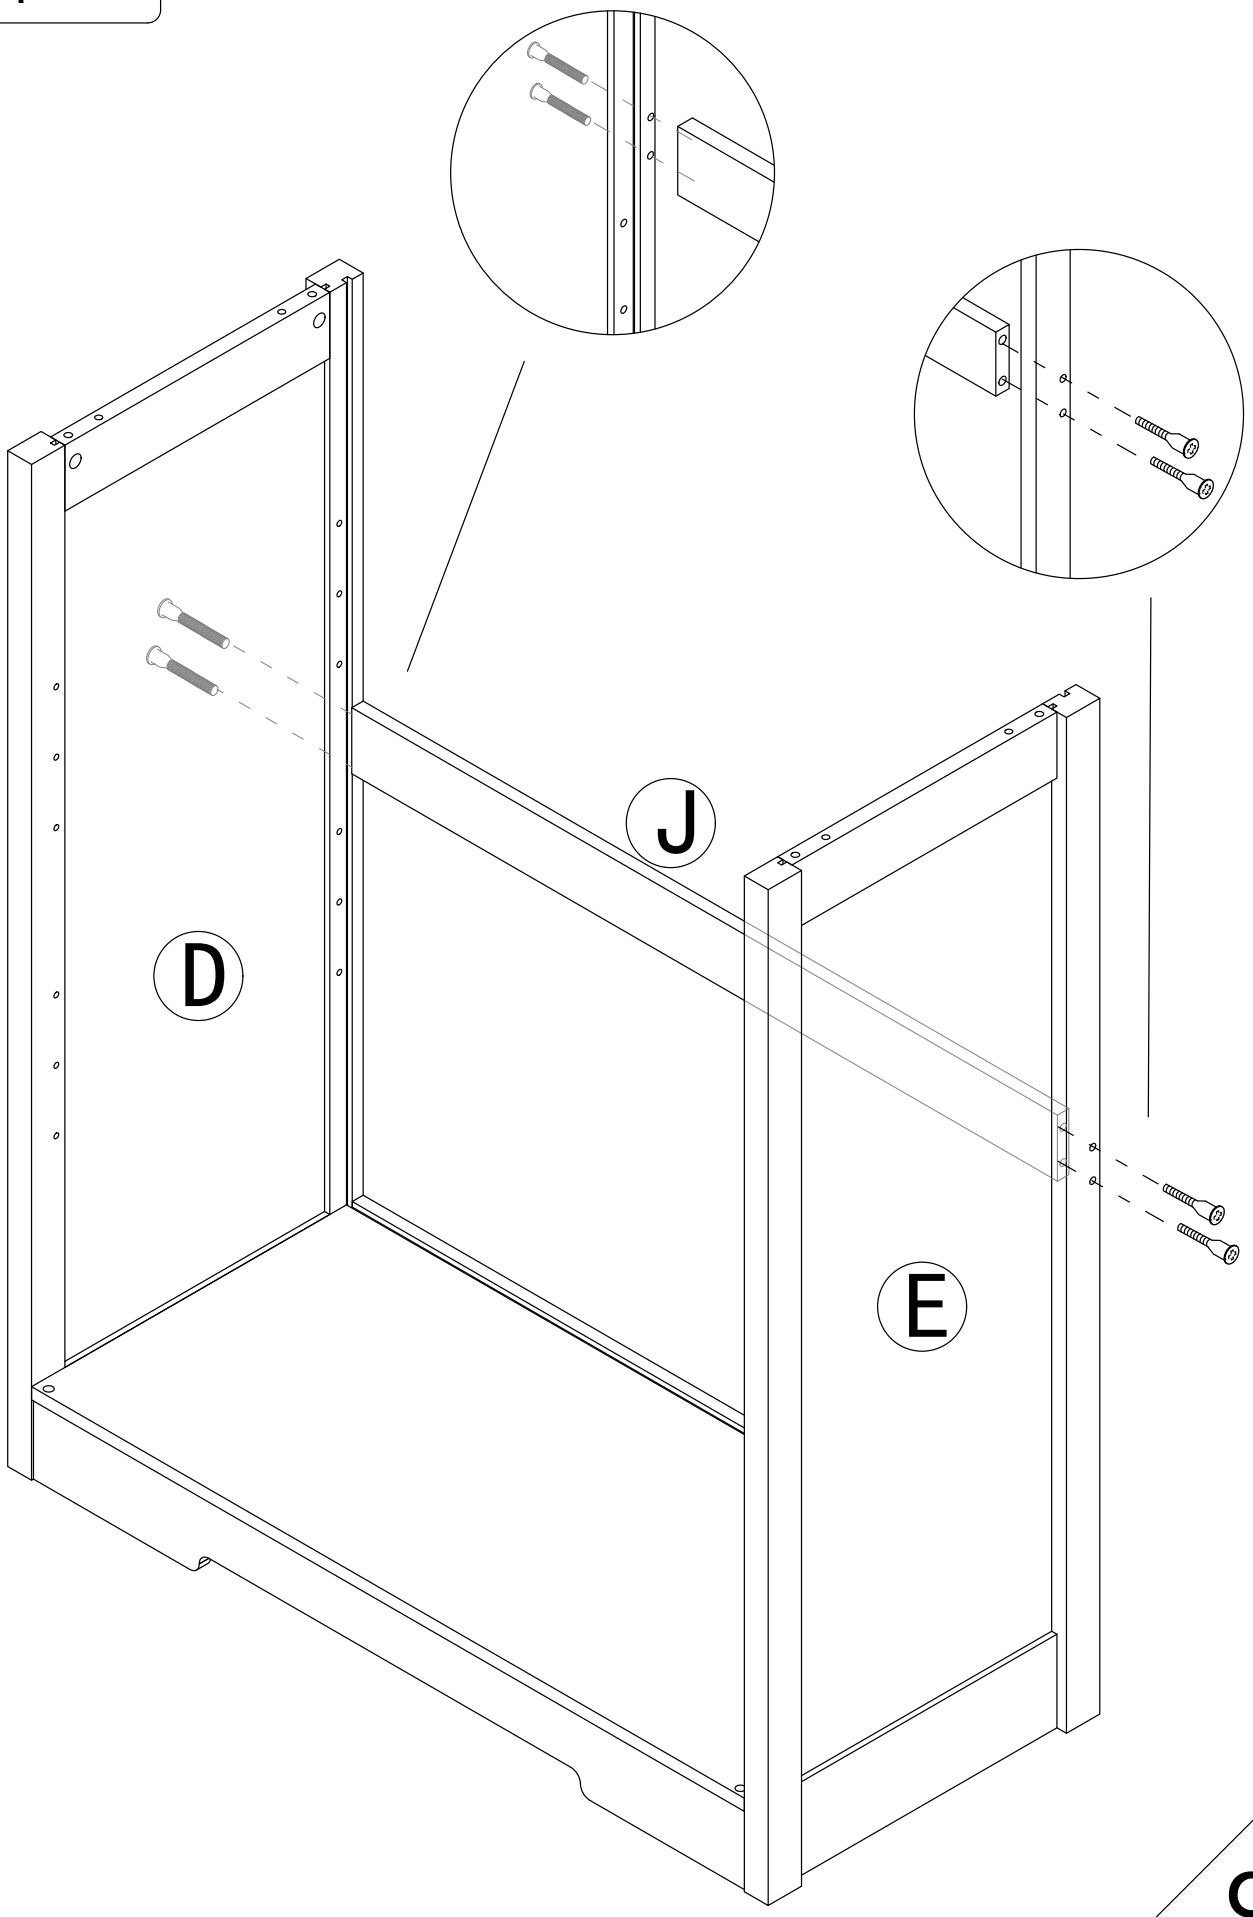


Step 11

3




x4

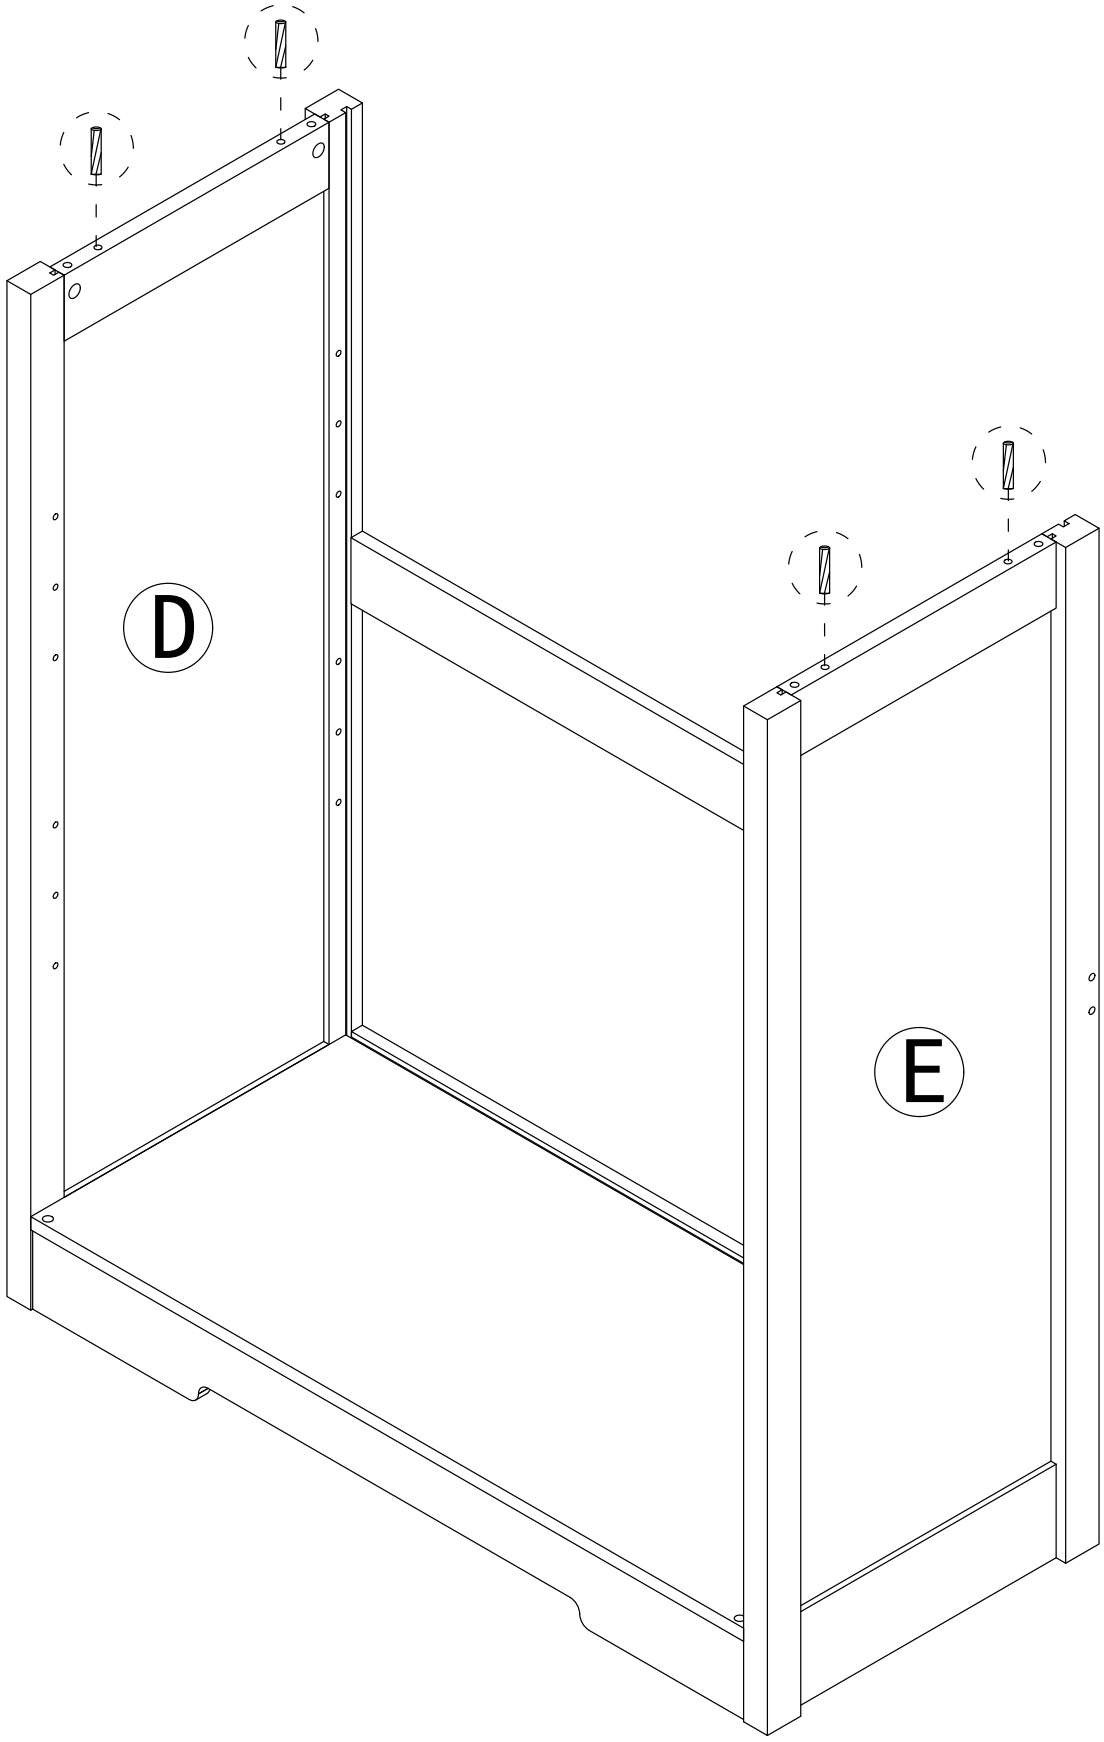


Step 12


5 x2

Place the "I" board, Backboard card strip, and "I" board in order

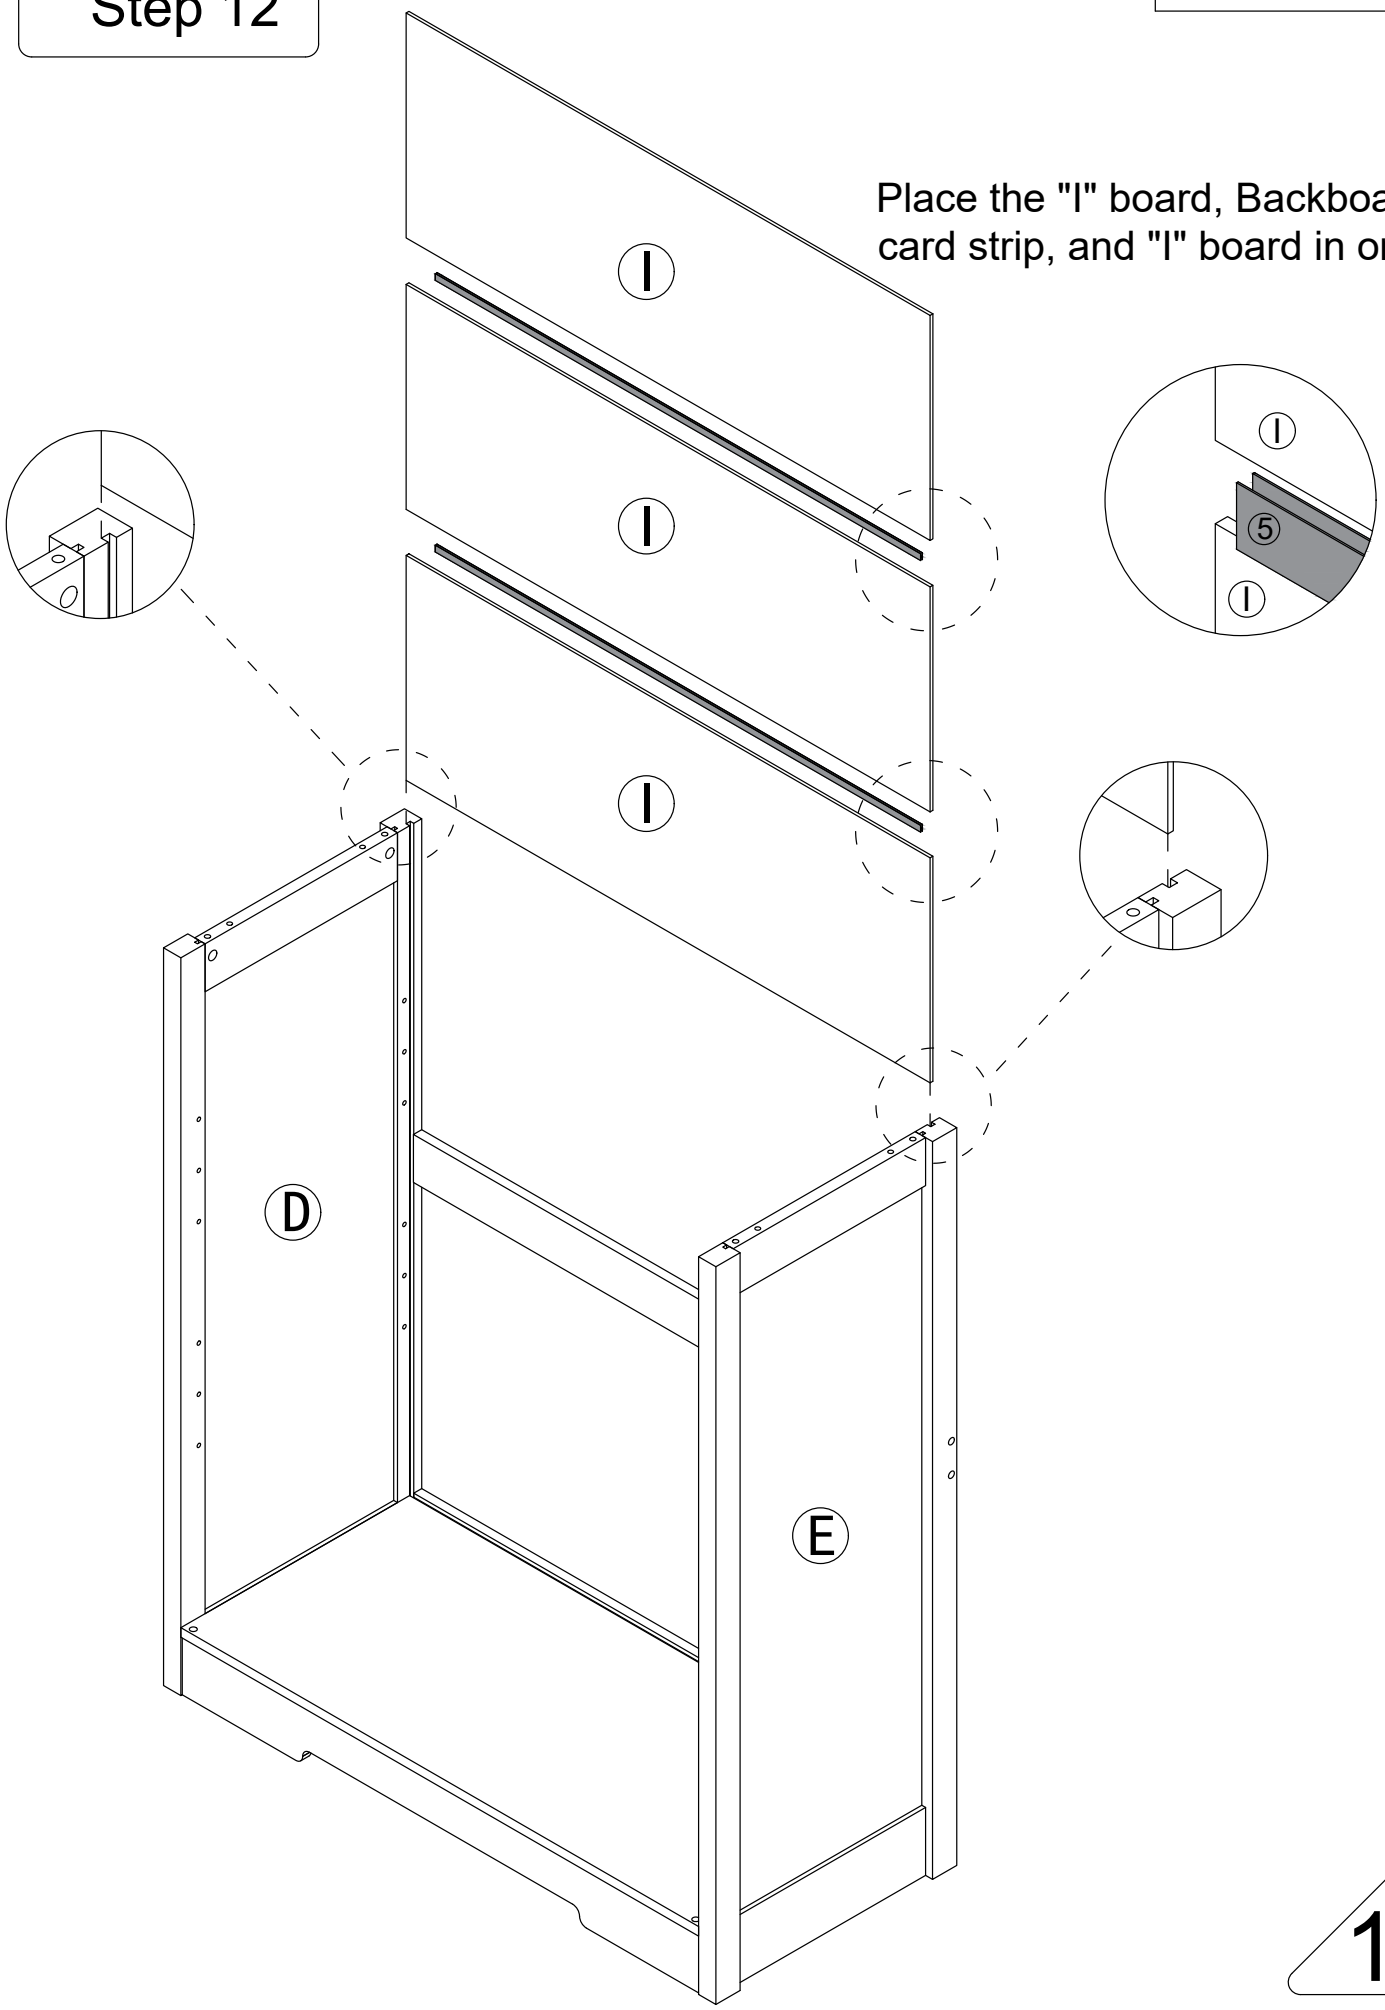



Step 13

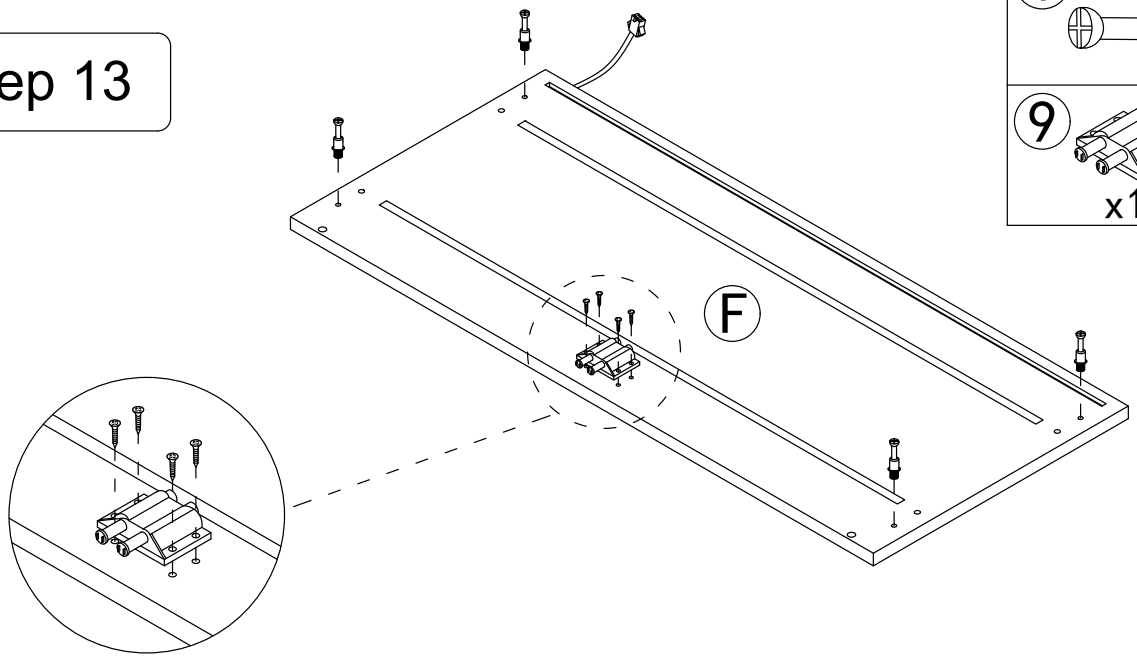





Step 14

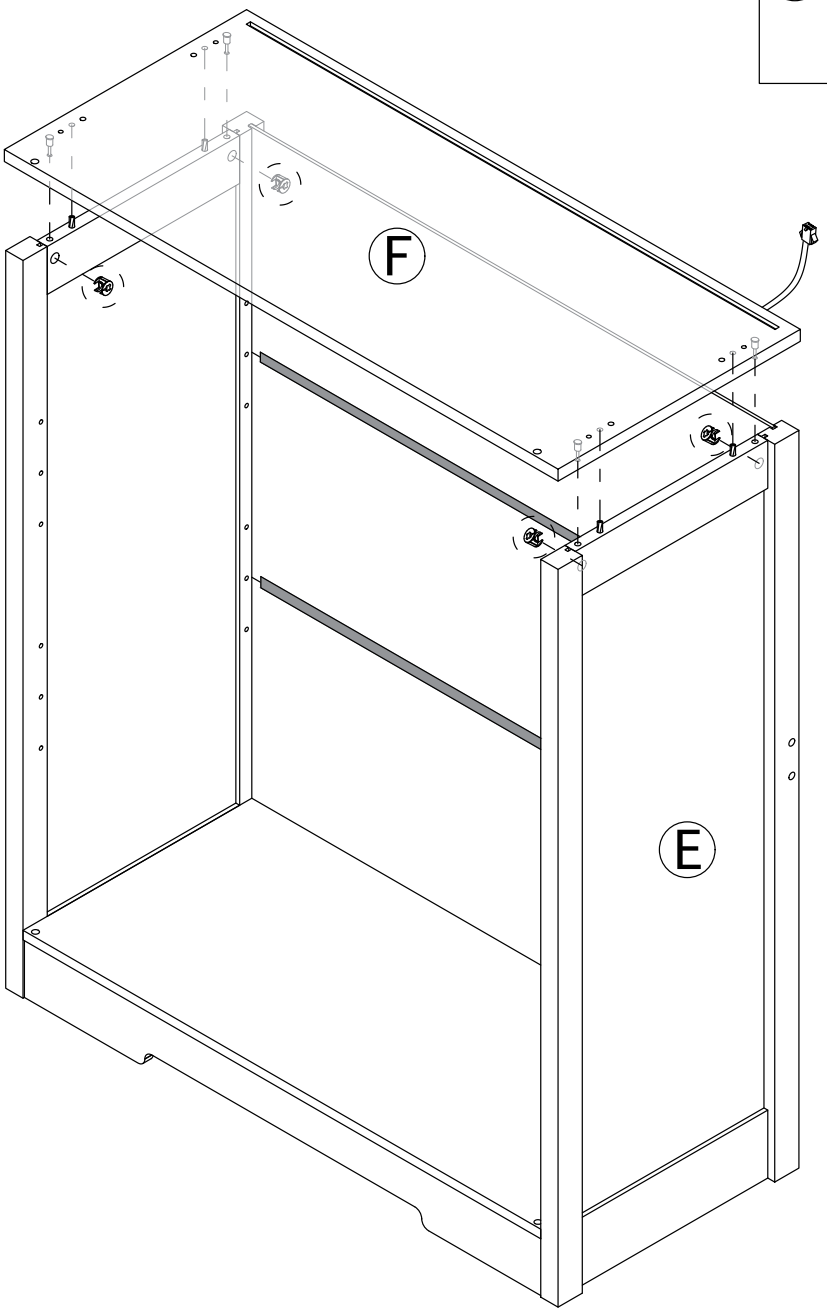





Step 15

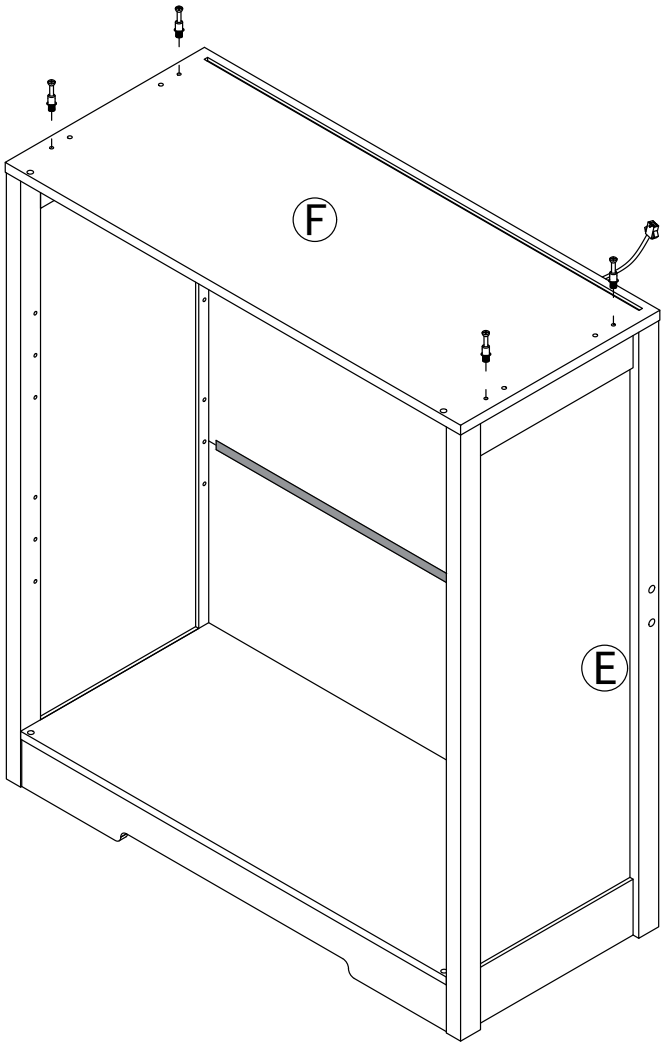




Step 16

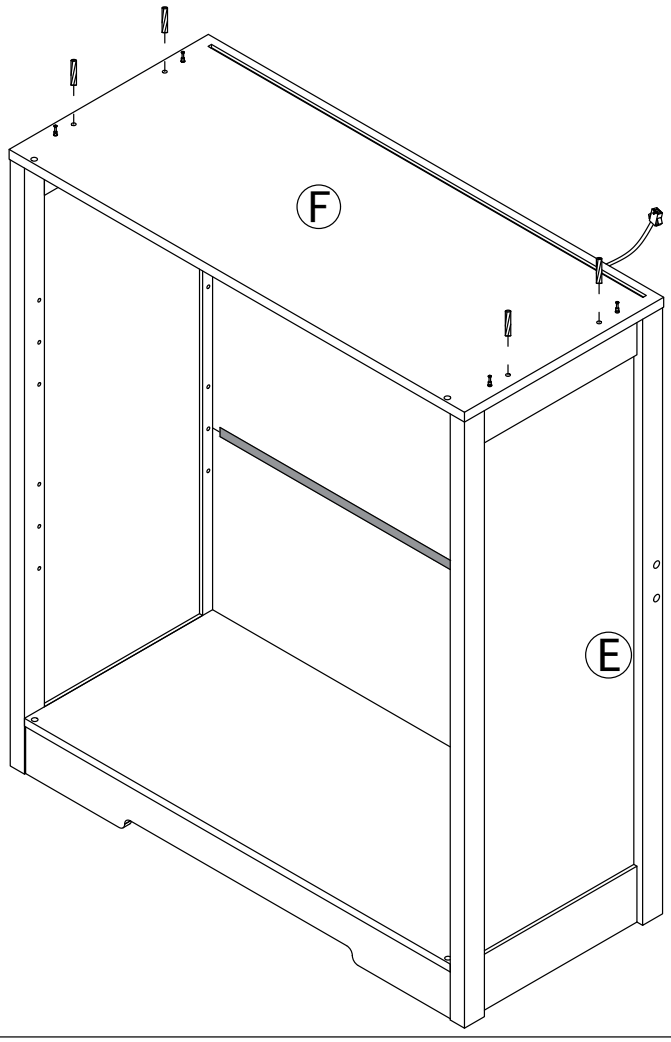




Step 17

2 x2

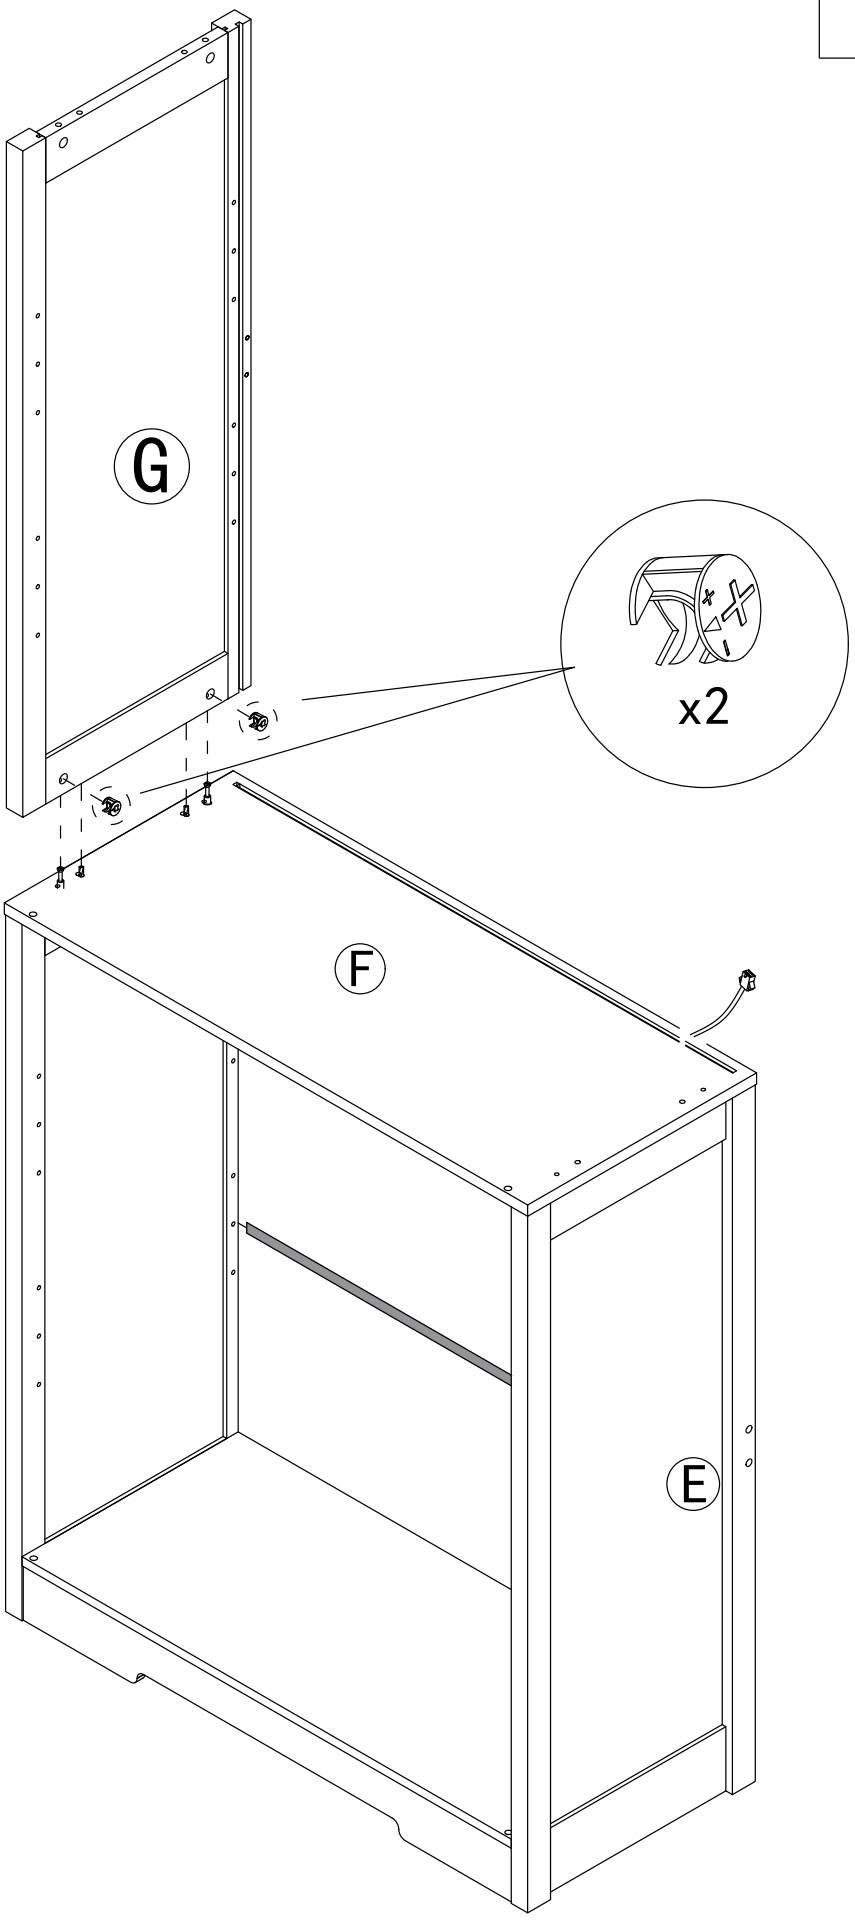

Step 18


2 x2

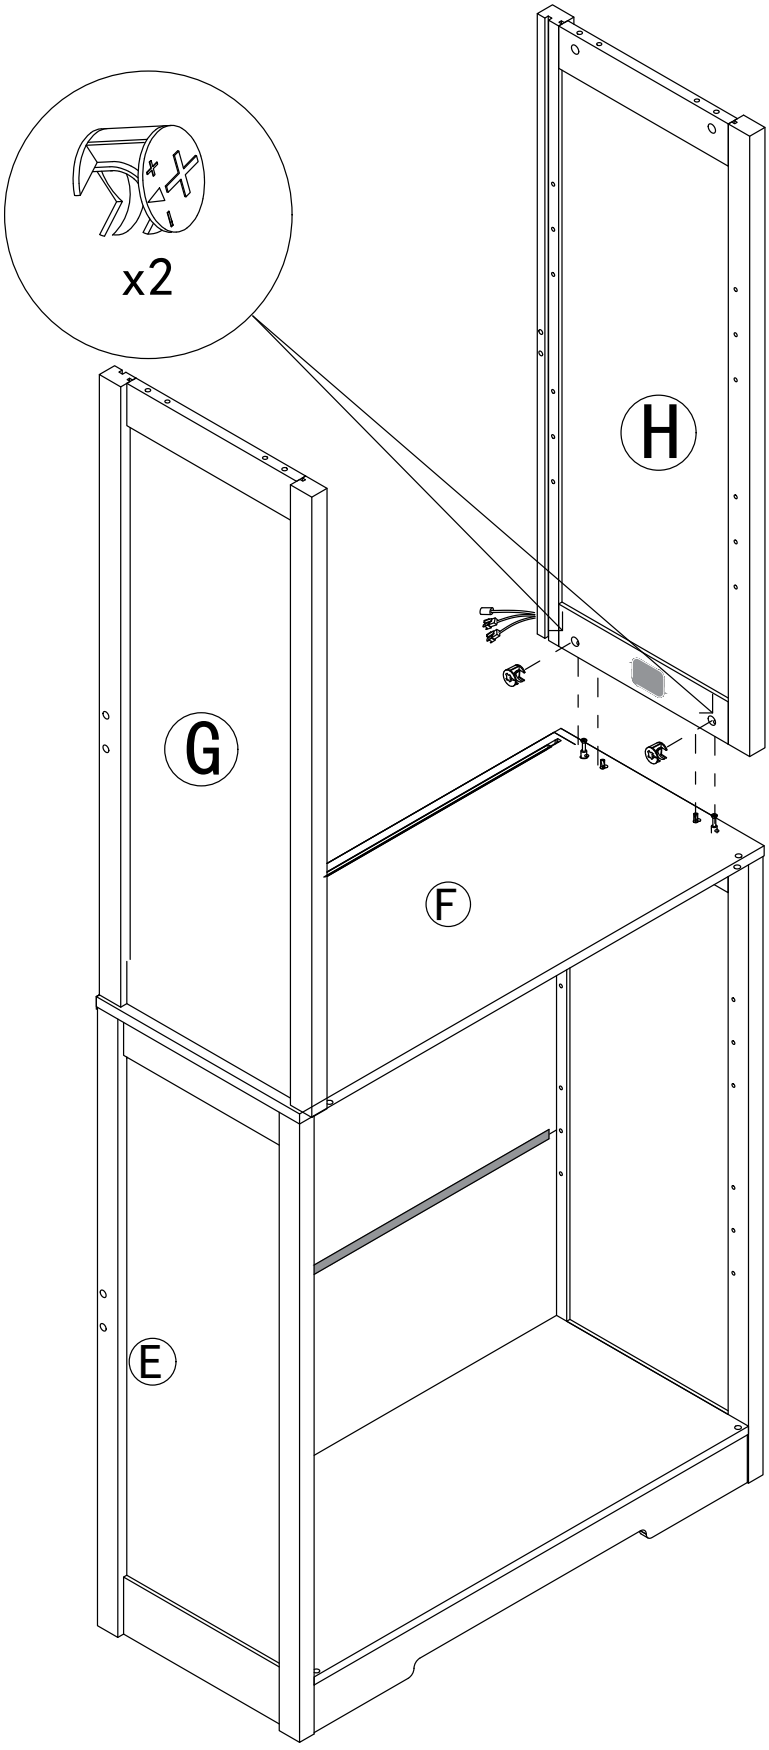


10 x4


Step 19


Bend the H board slightly outward to facilitate the installation of the J board.

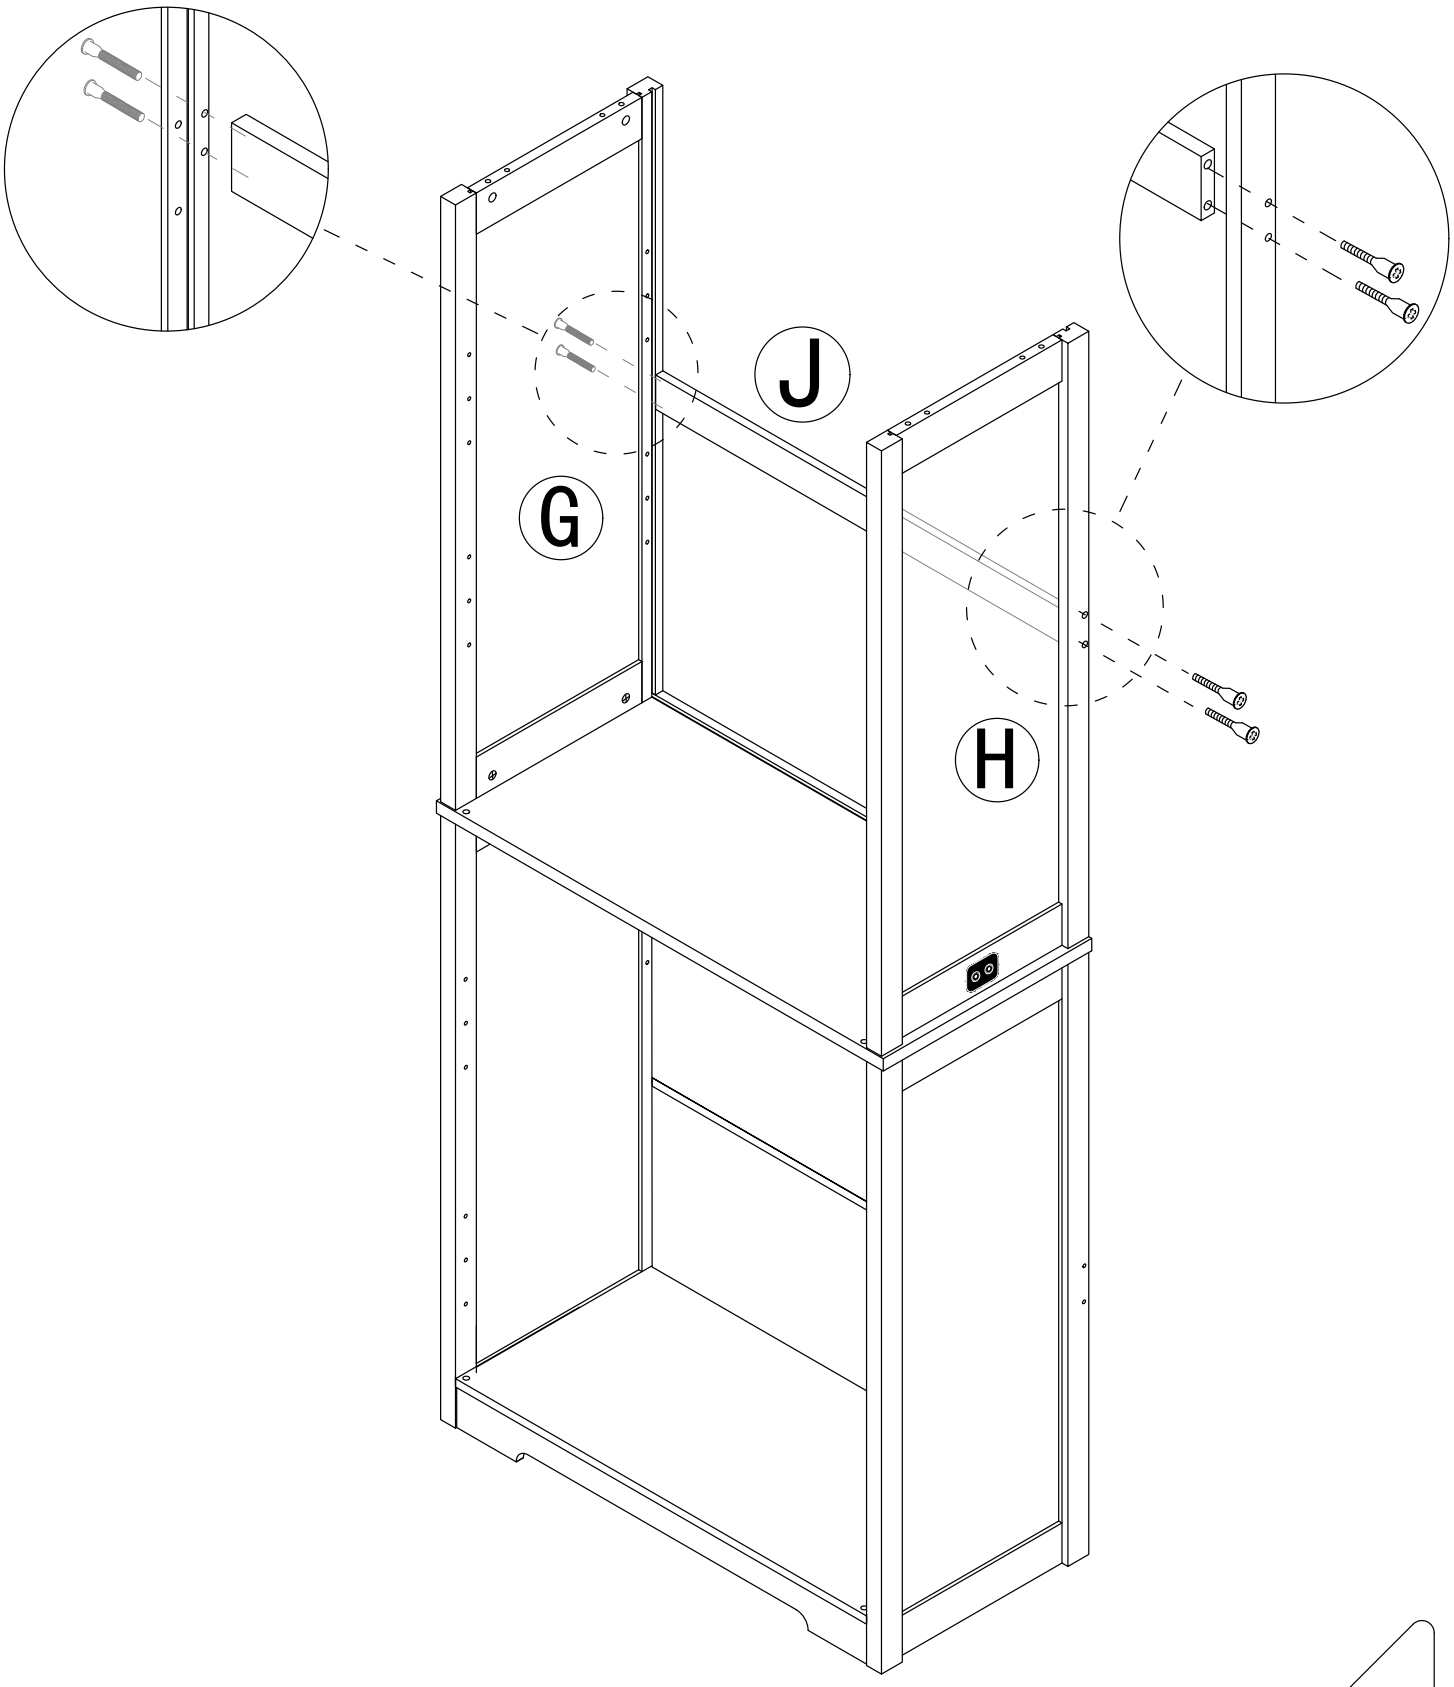


Step 20

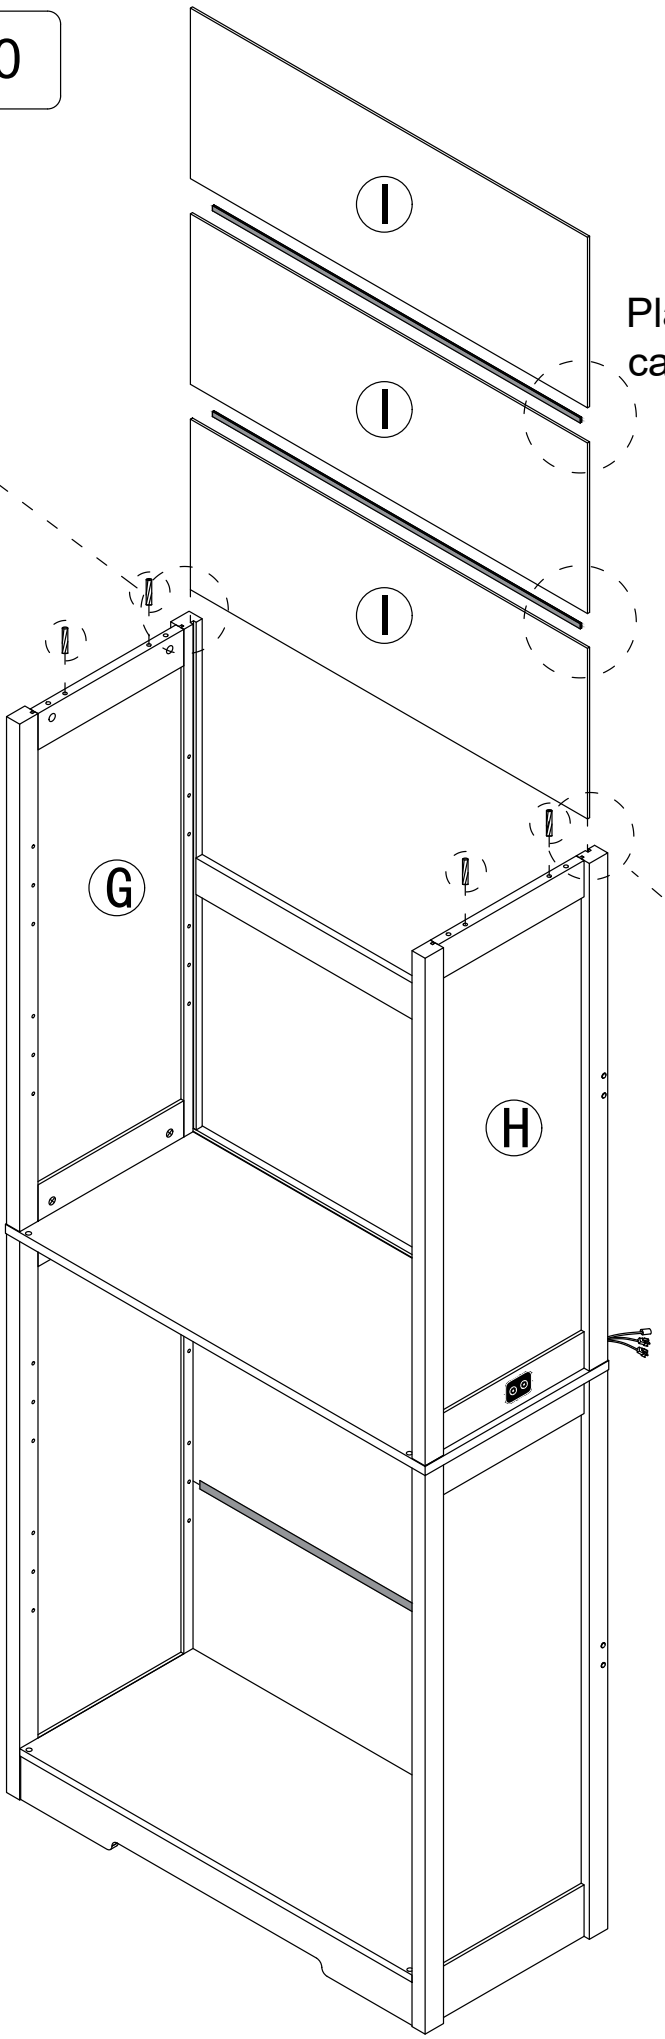









3 x4

5 x2

Place the "I" board, Backboard card strip, and "I" board in order

Step 21

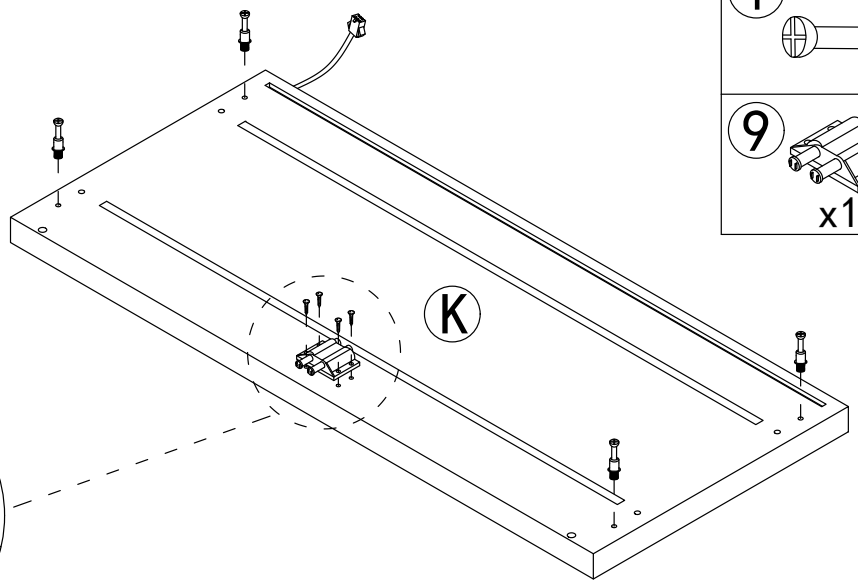




1 x4

9 x1


x4

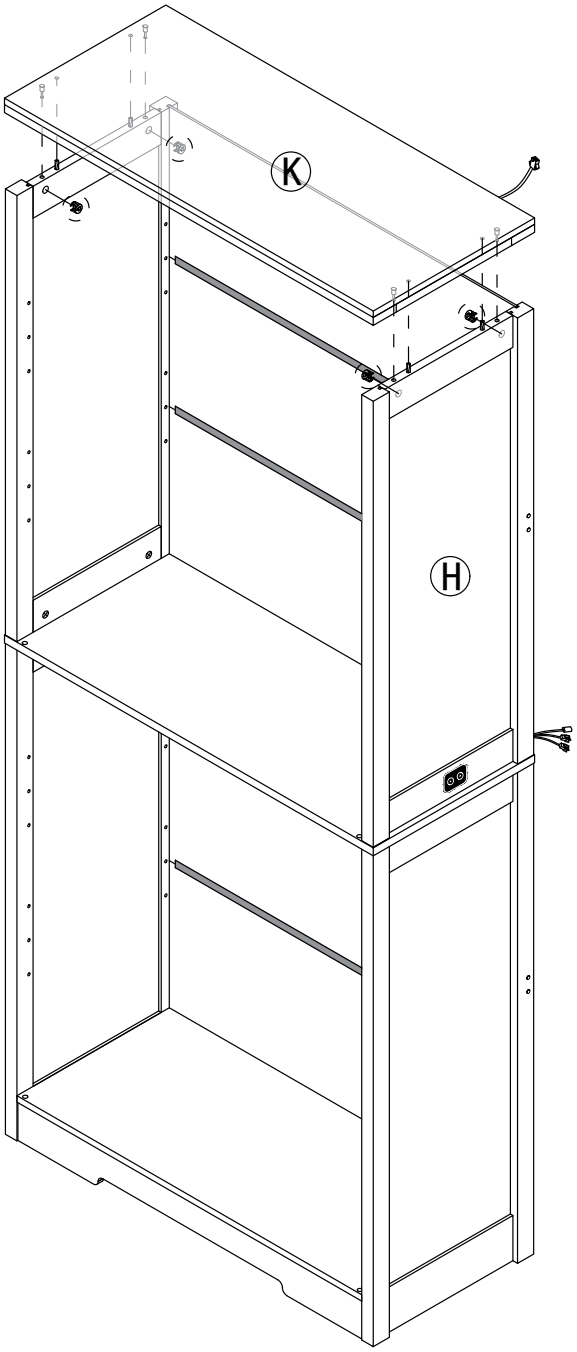


2 x4

Step 22

8 x16

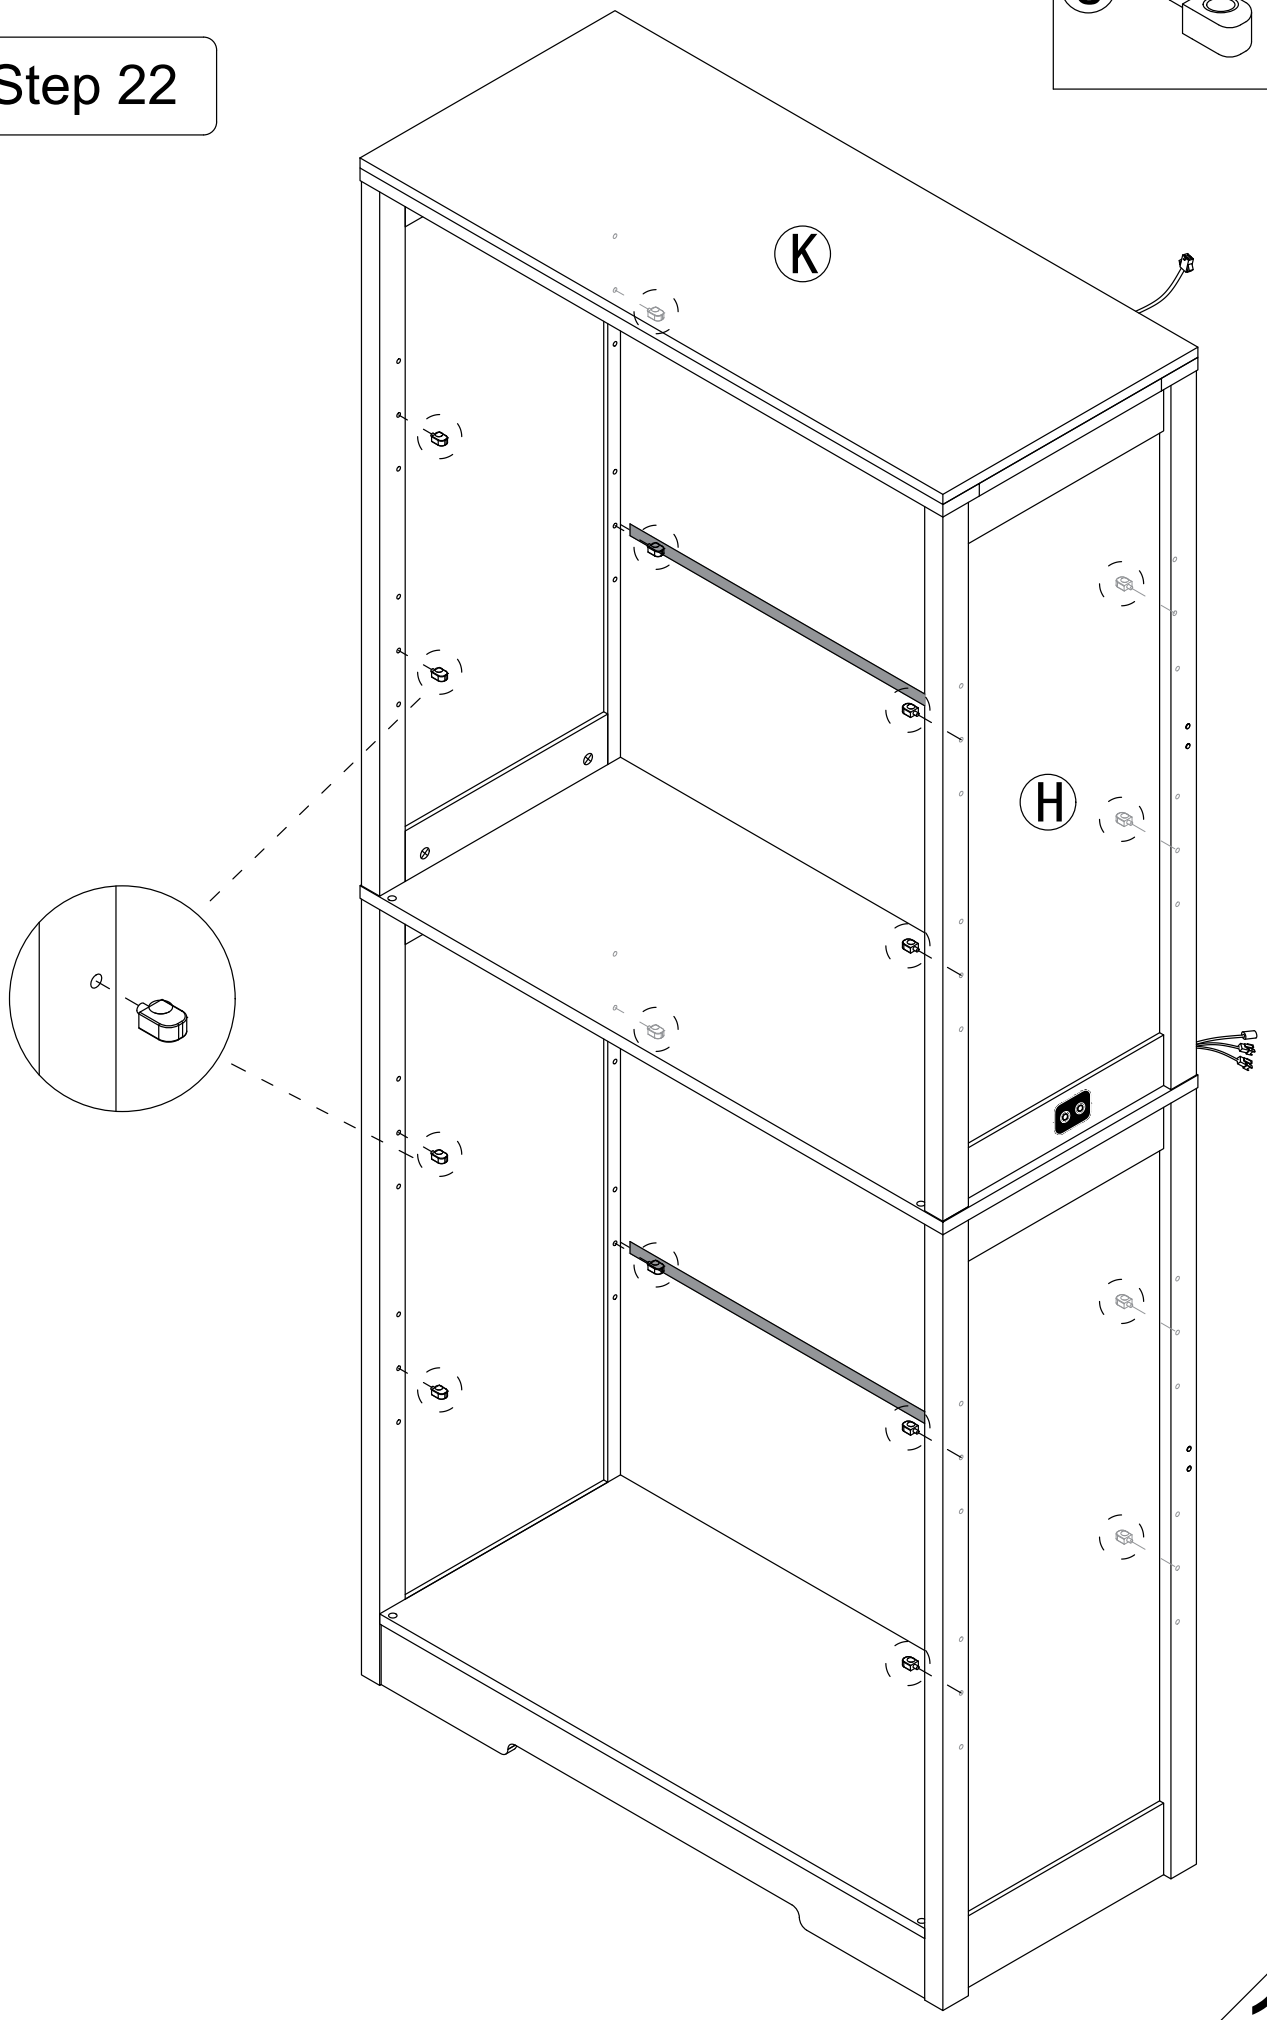


Step 23

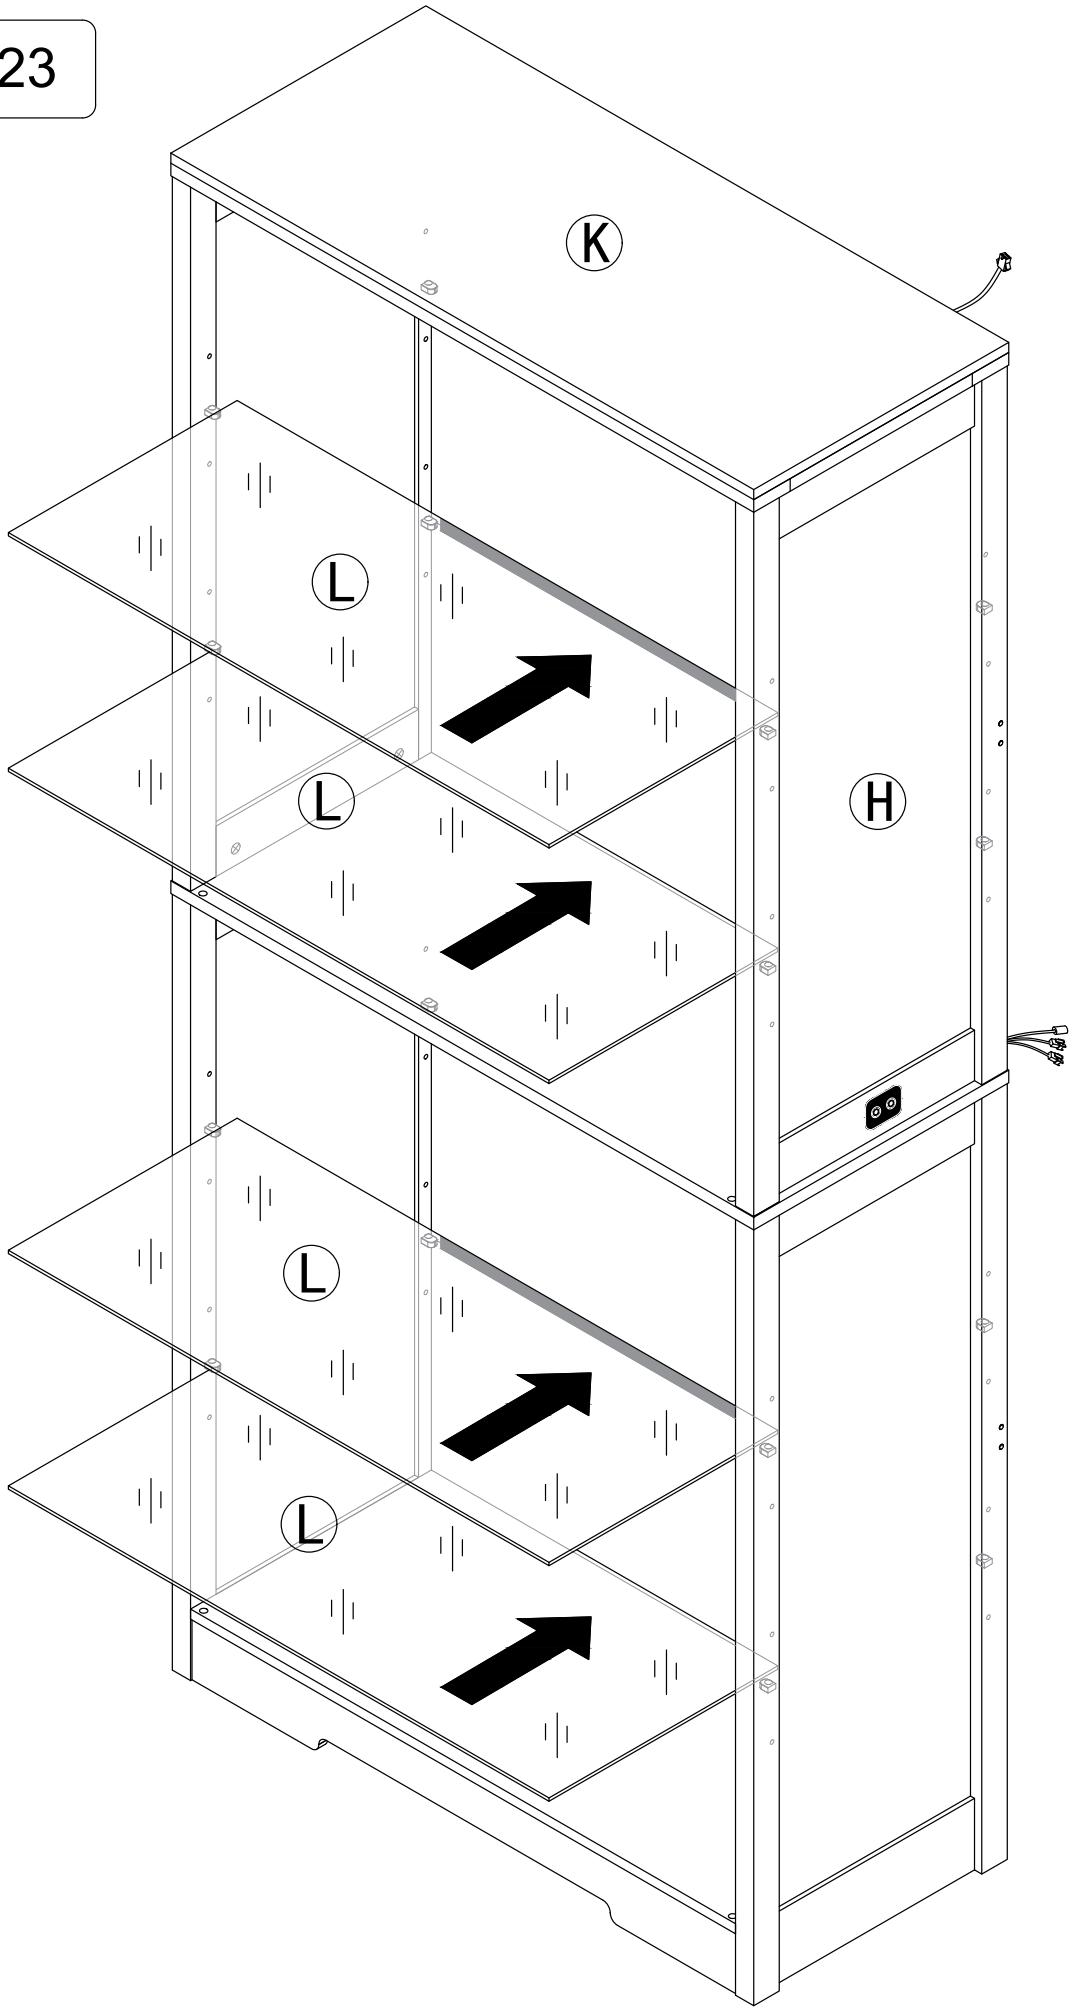



Step 24


First, completely unscrew the screws on the parts



Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

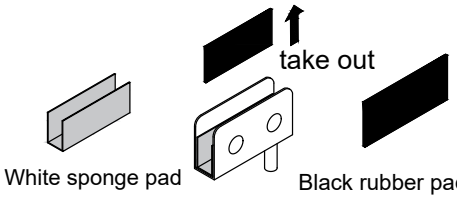



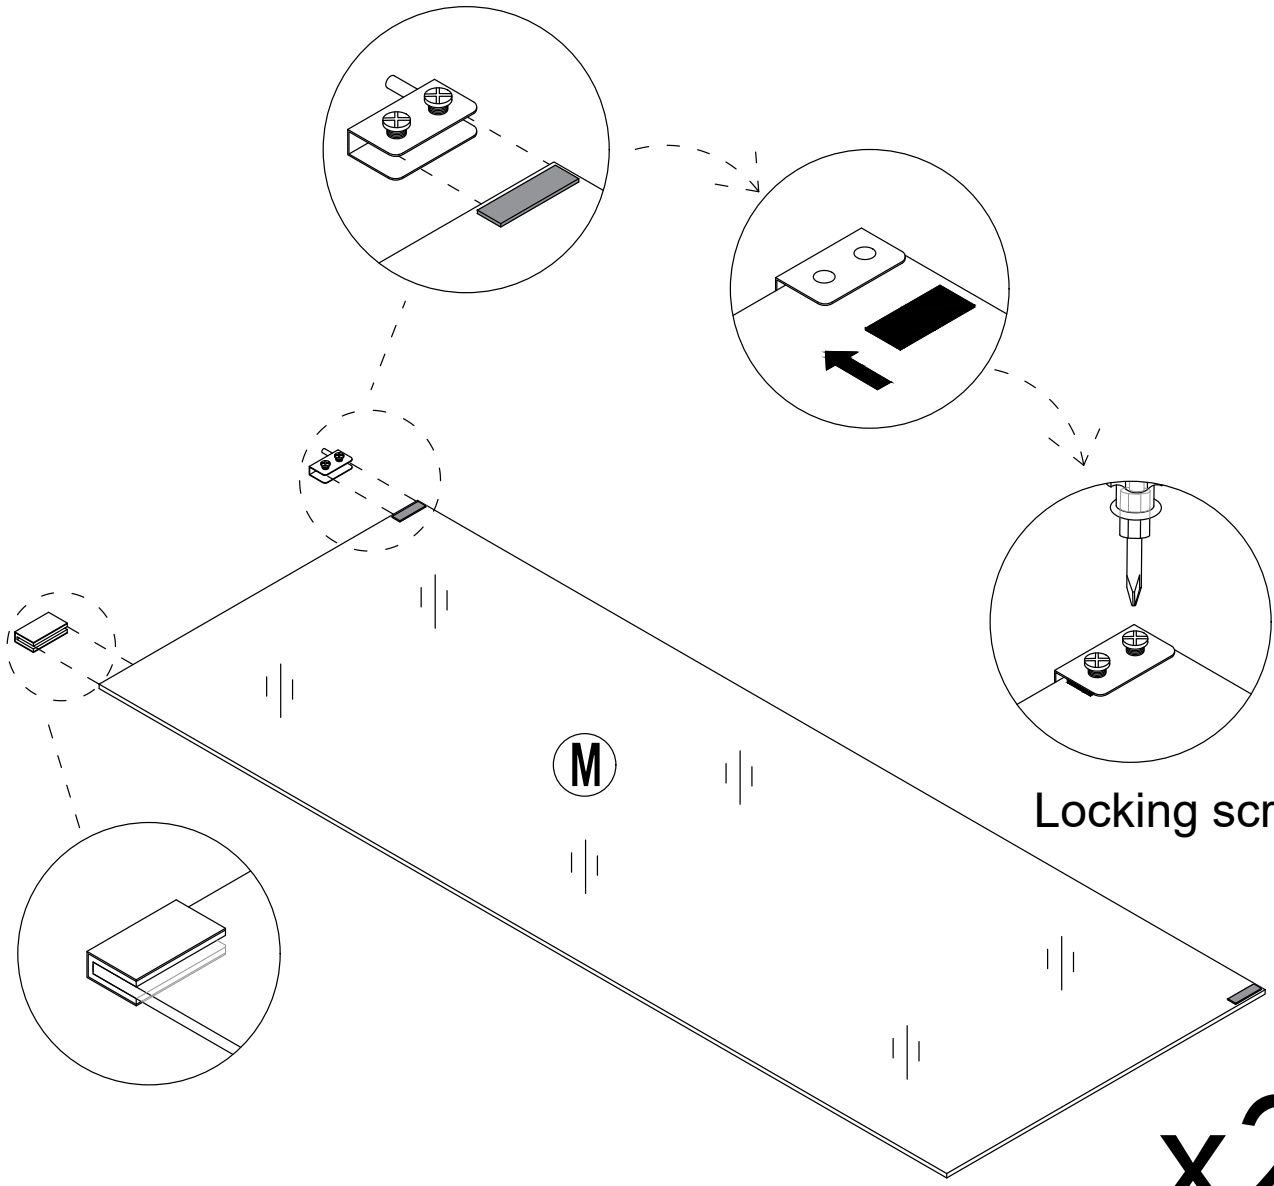



x2

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 25



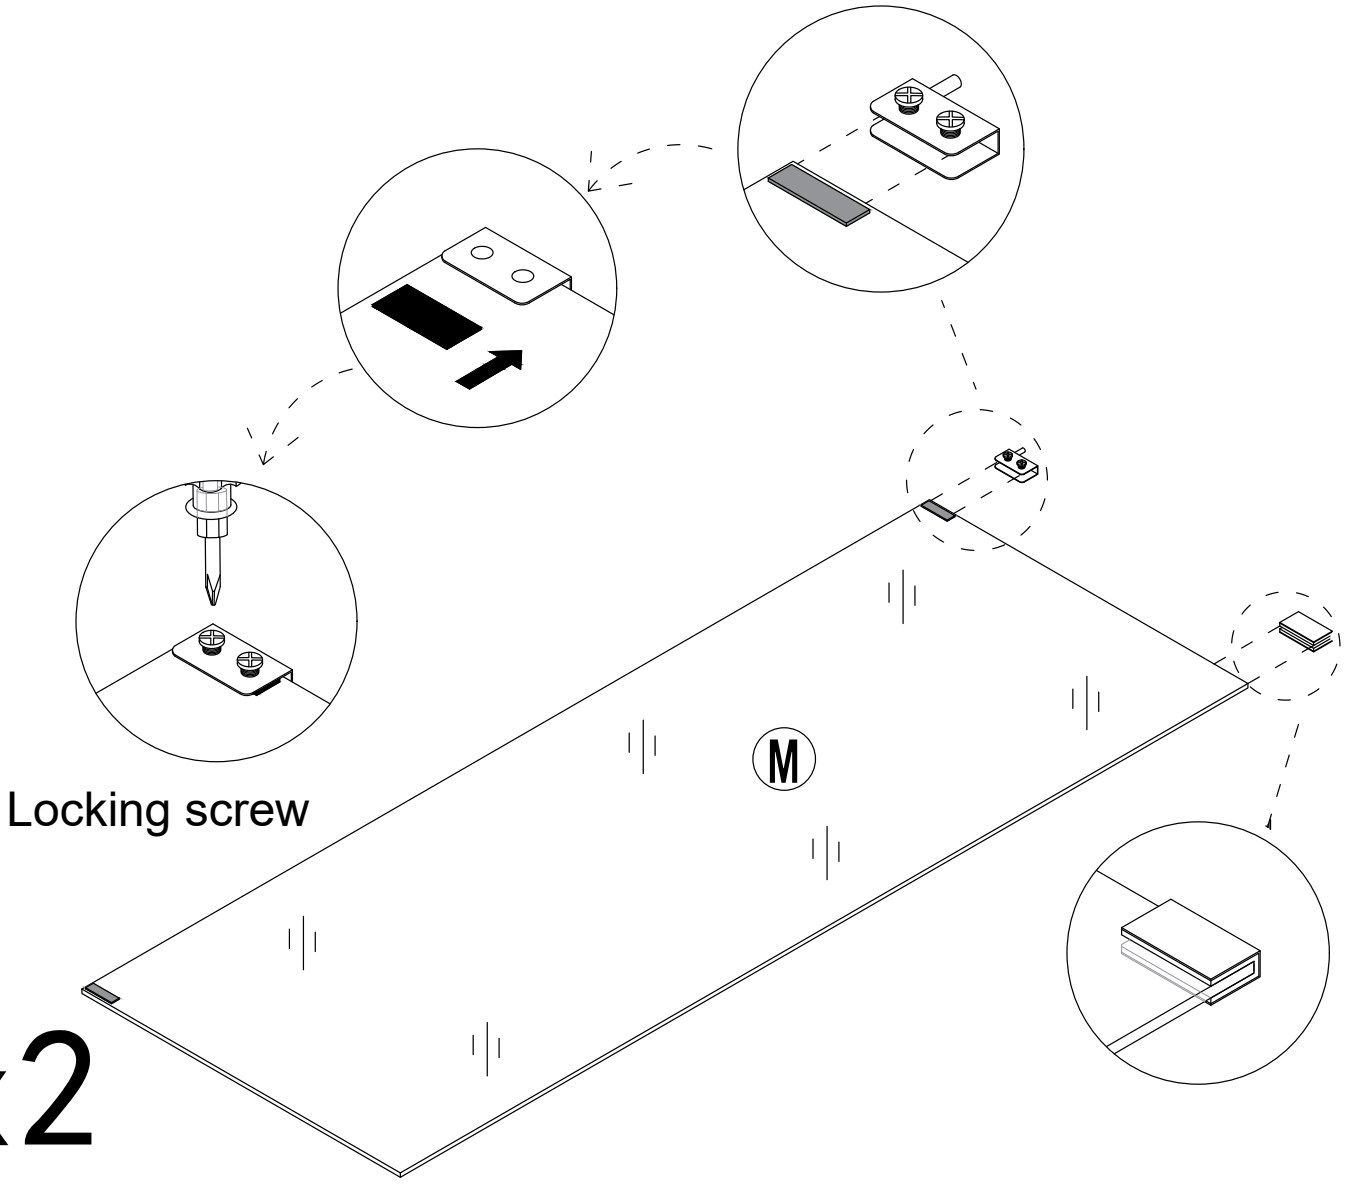



x2


Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 26



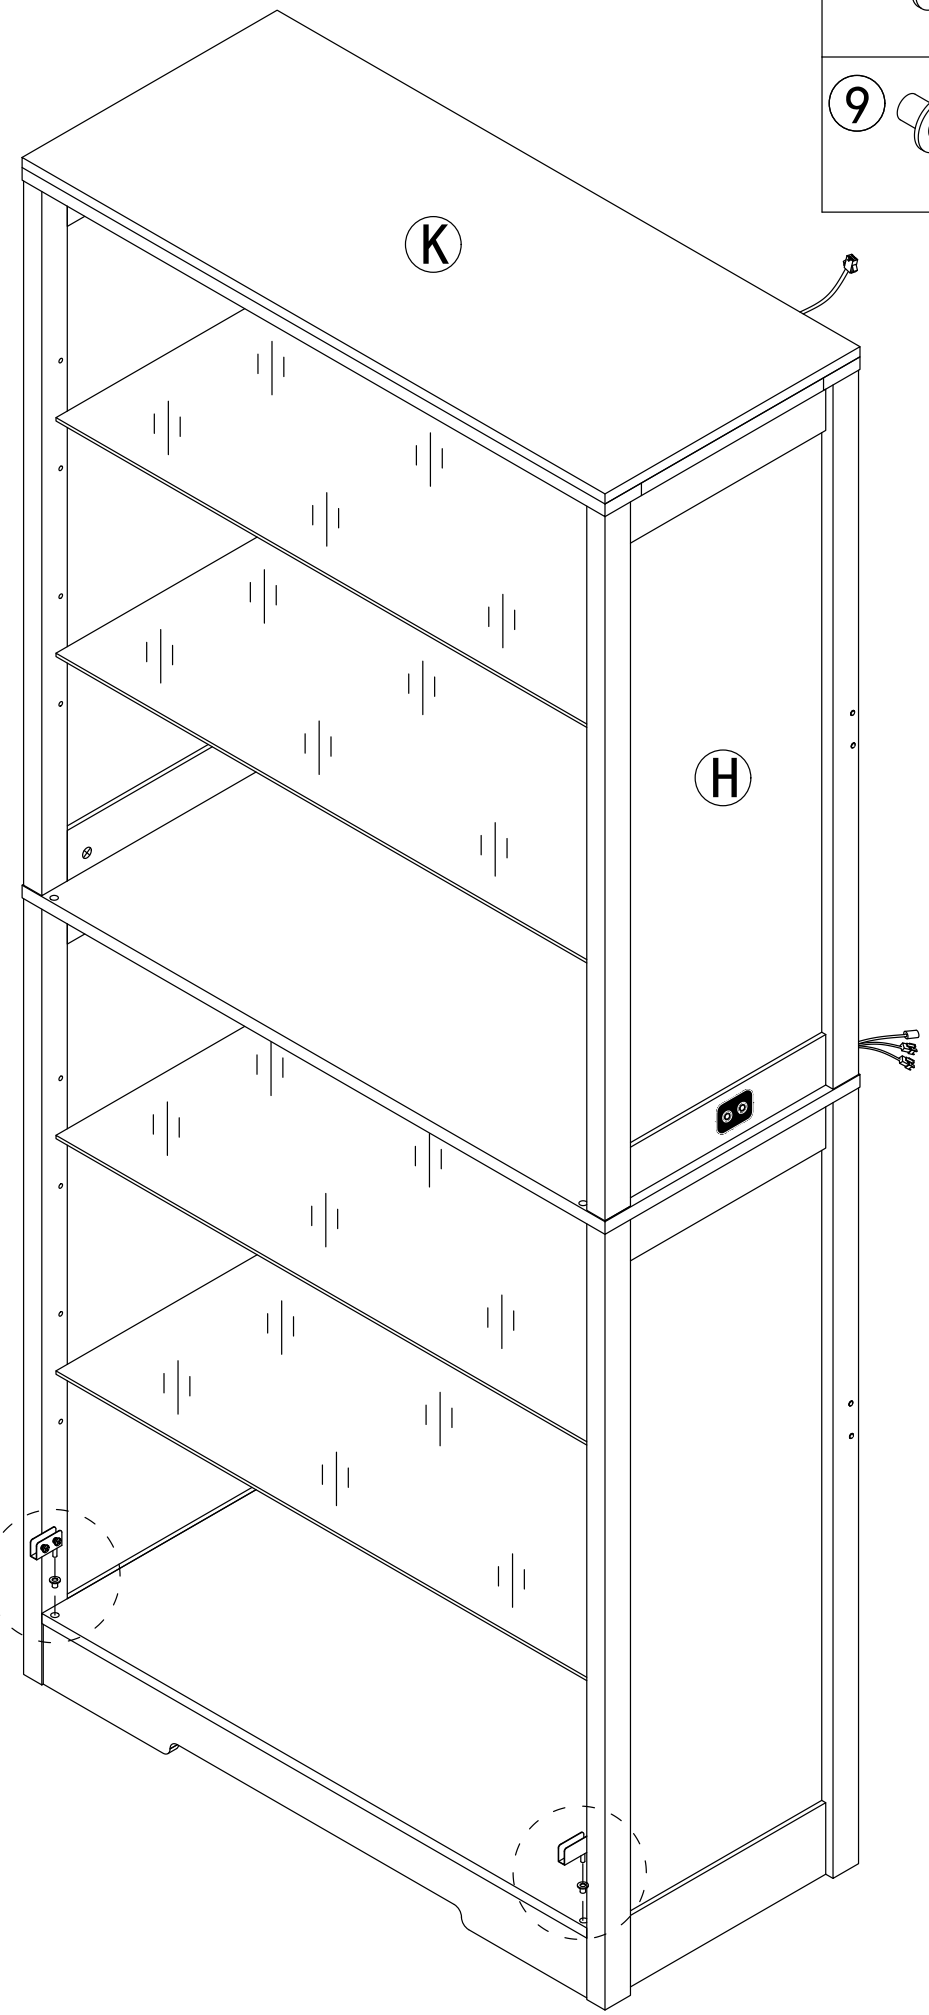




Step 27


Pay attention to the direction of the door hinge during installation

9 x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed





third

Locking screw

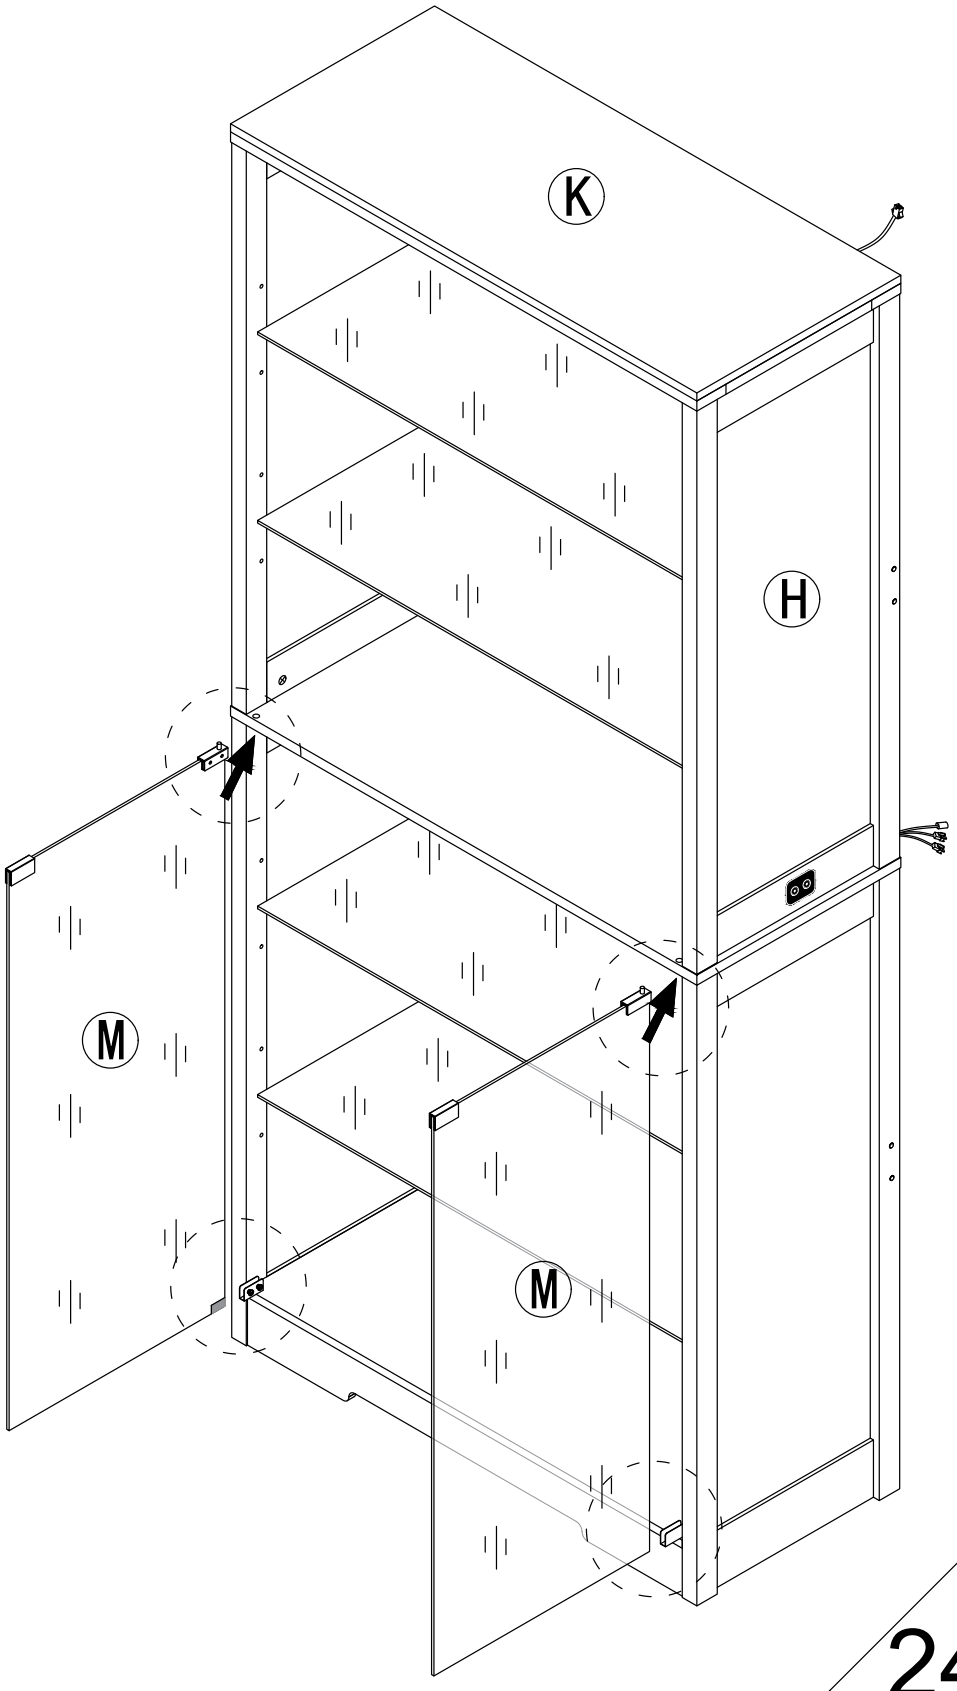

Step 28



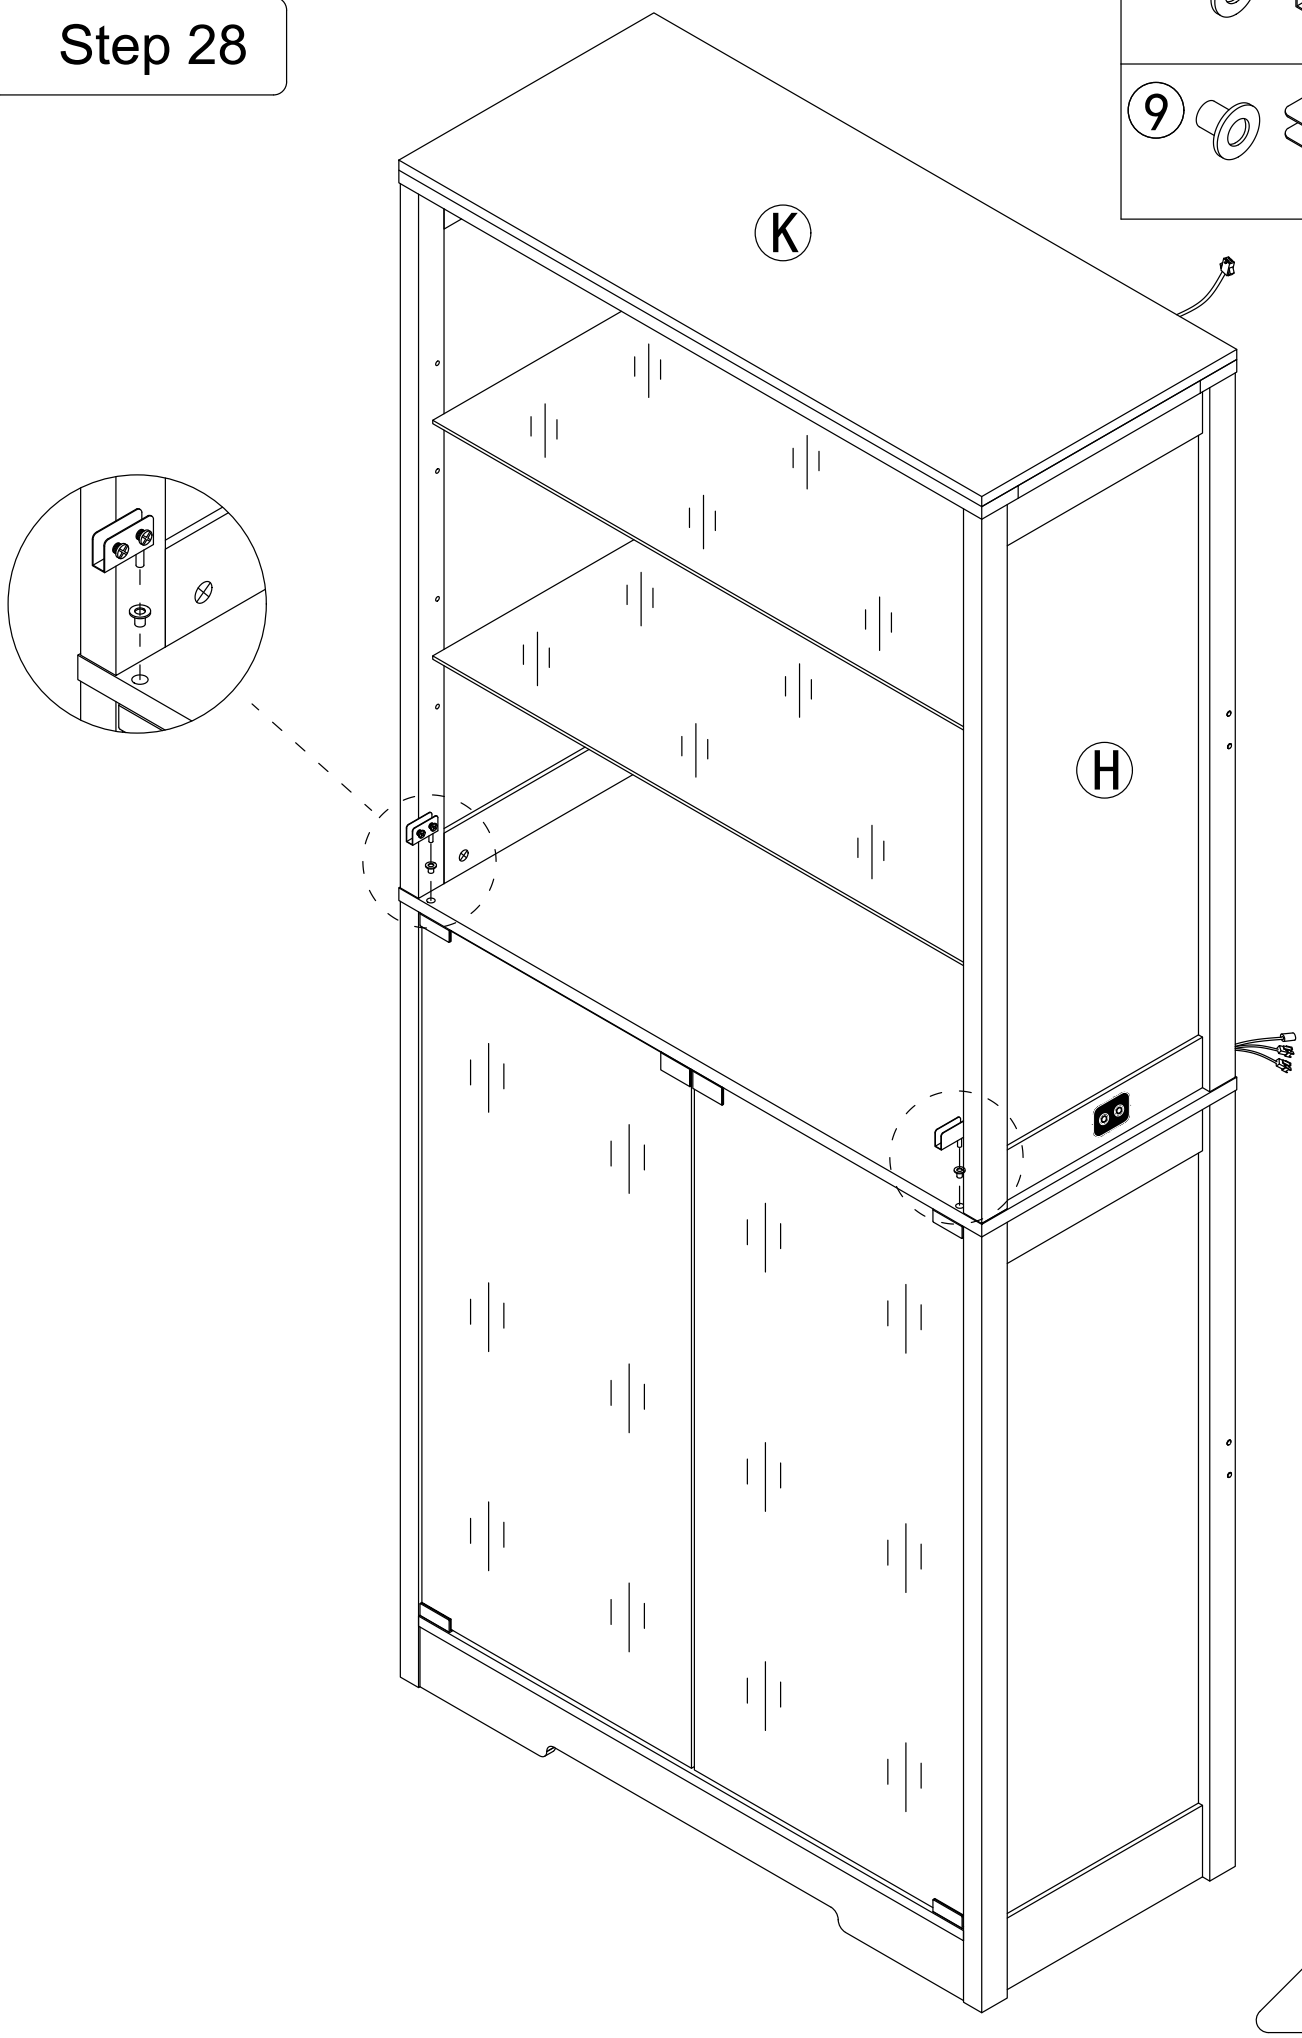


Step 29


Pay attention to the direction of the door hinge during installation

9 x2


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first



second

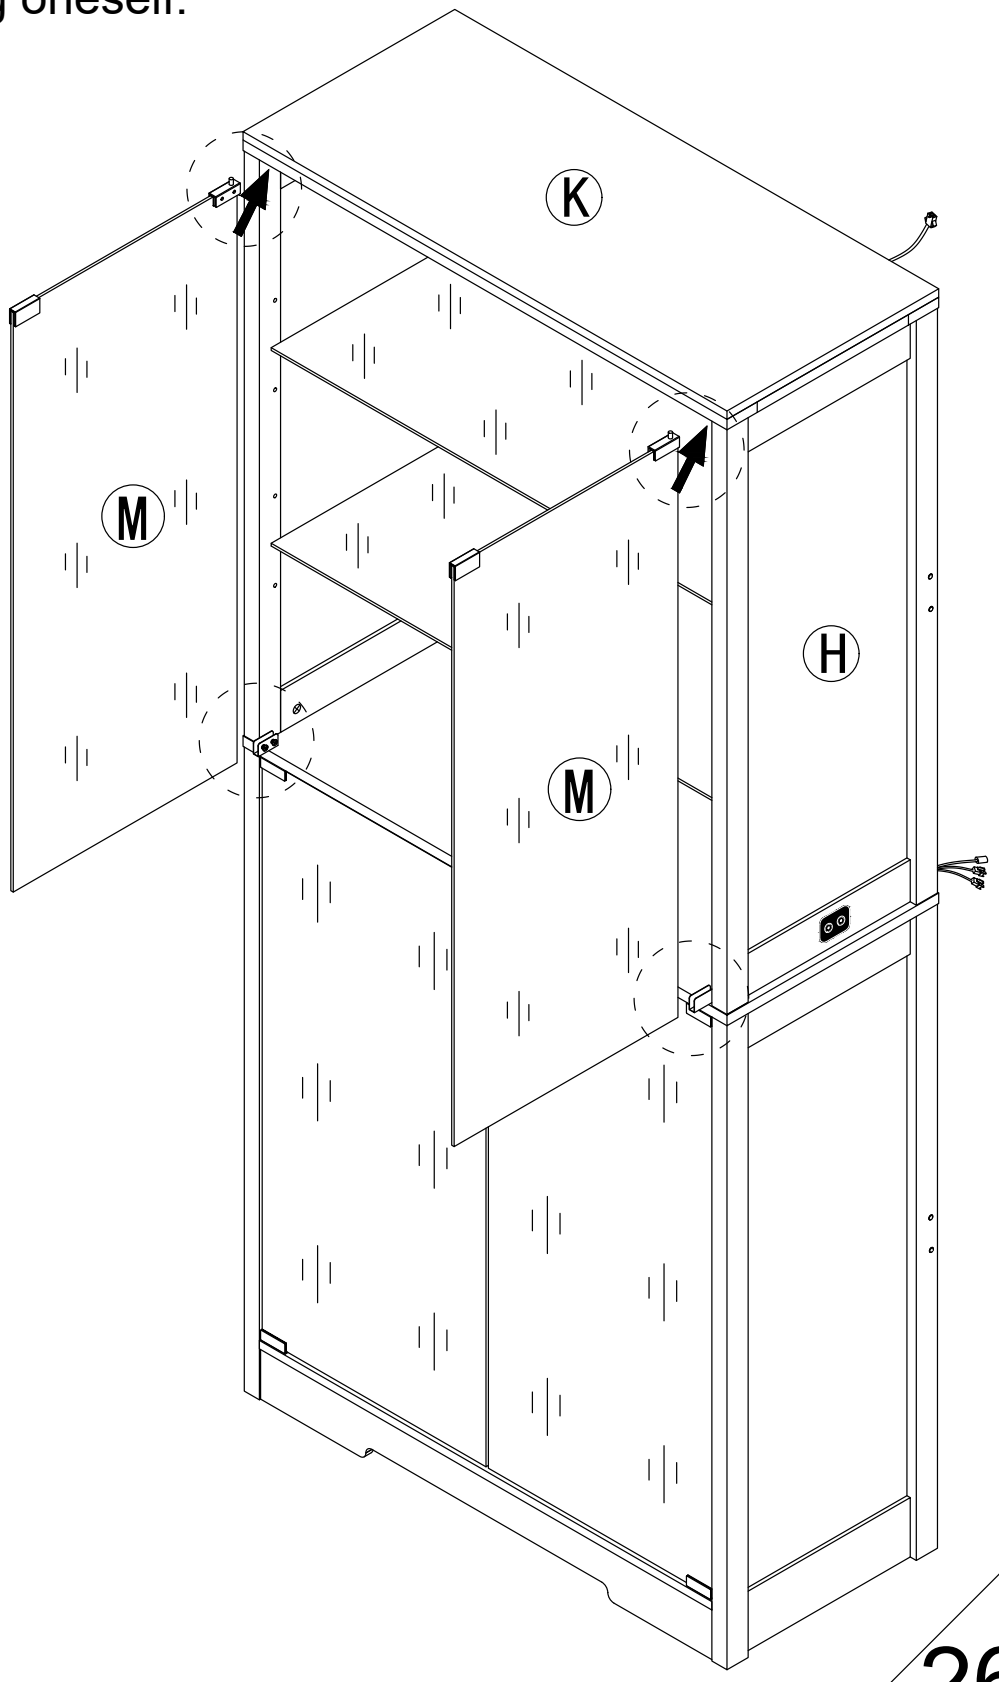

After installing the glass door, place the black gasket on the side where the screws are installed




third


Locking screw

Step 30


The rebound device automatically opens and closes by pressing

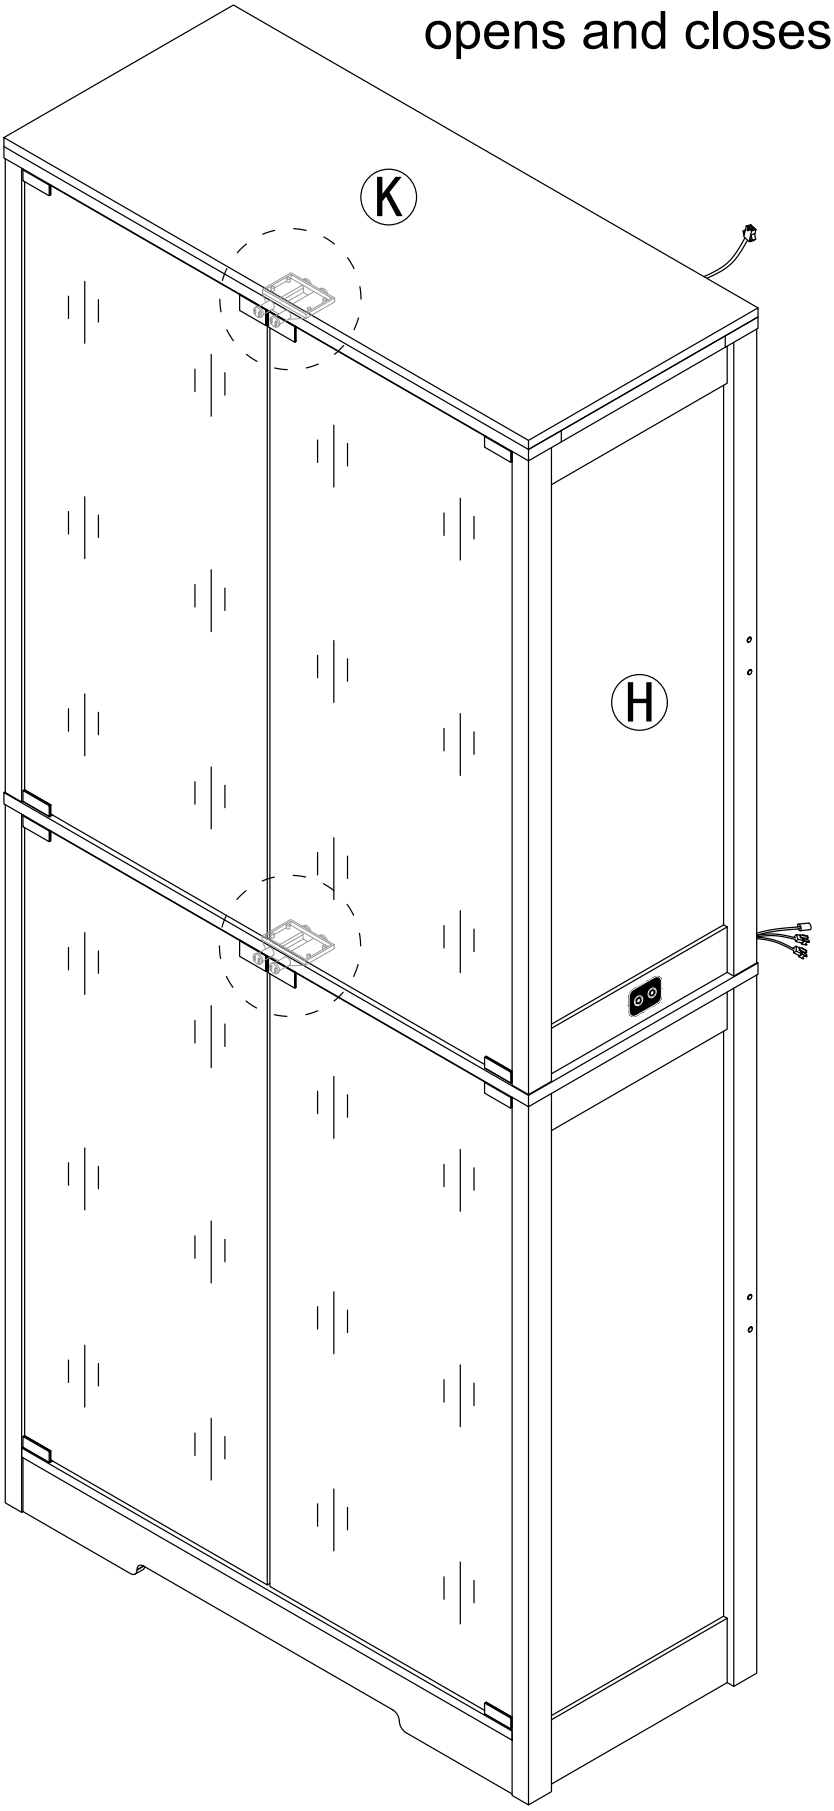

Open the glass door

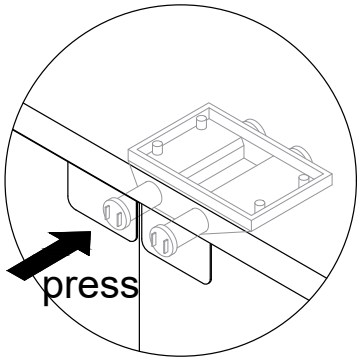


Close the glass door

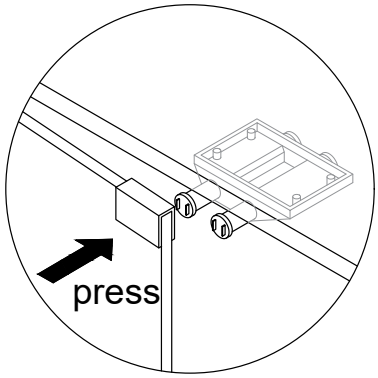


Step 31

6 x24

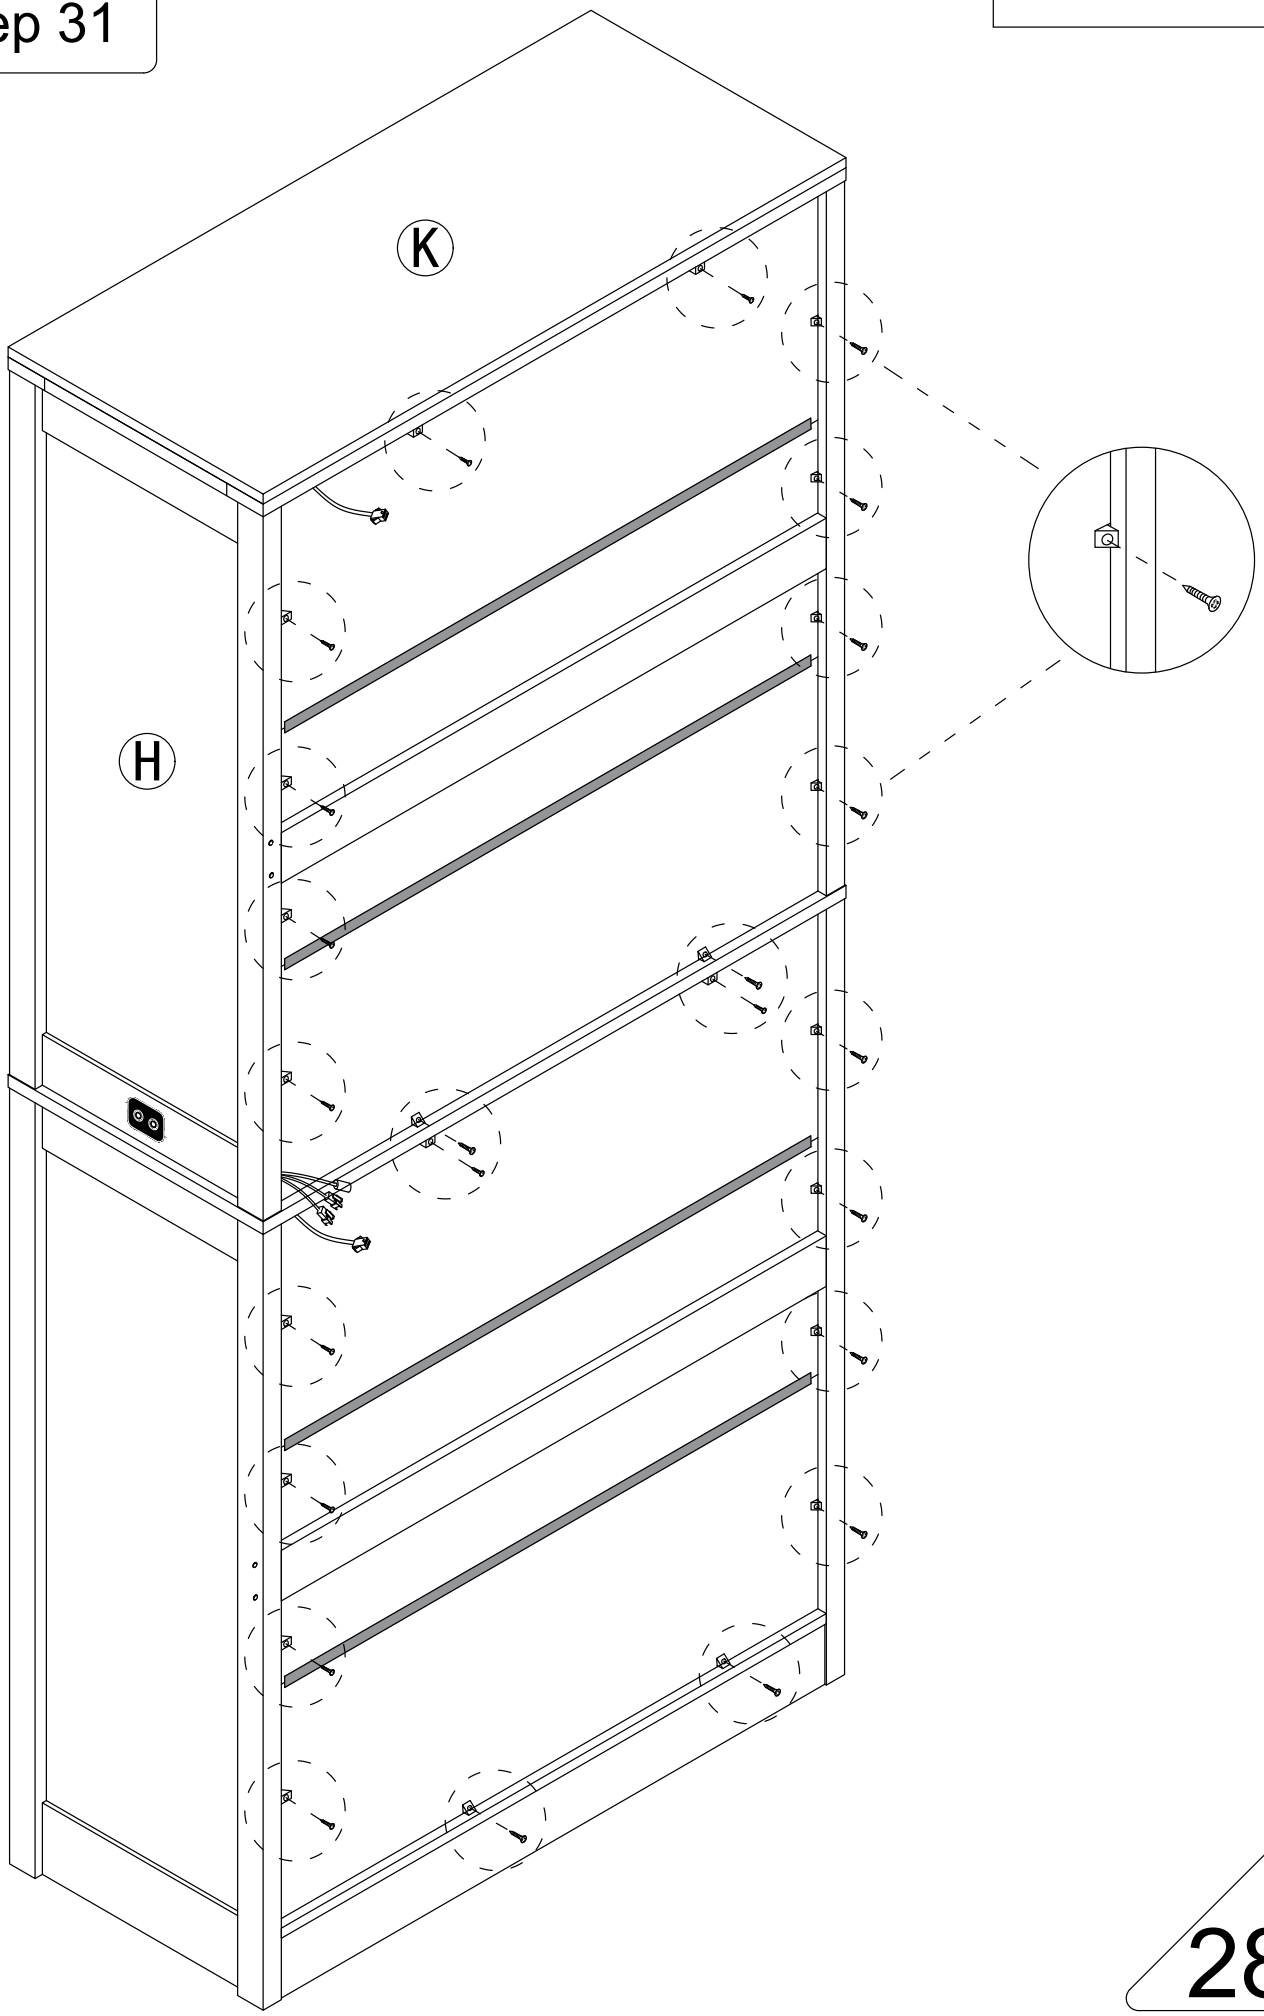


Step 32

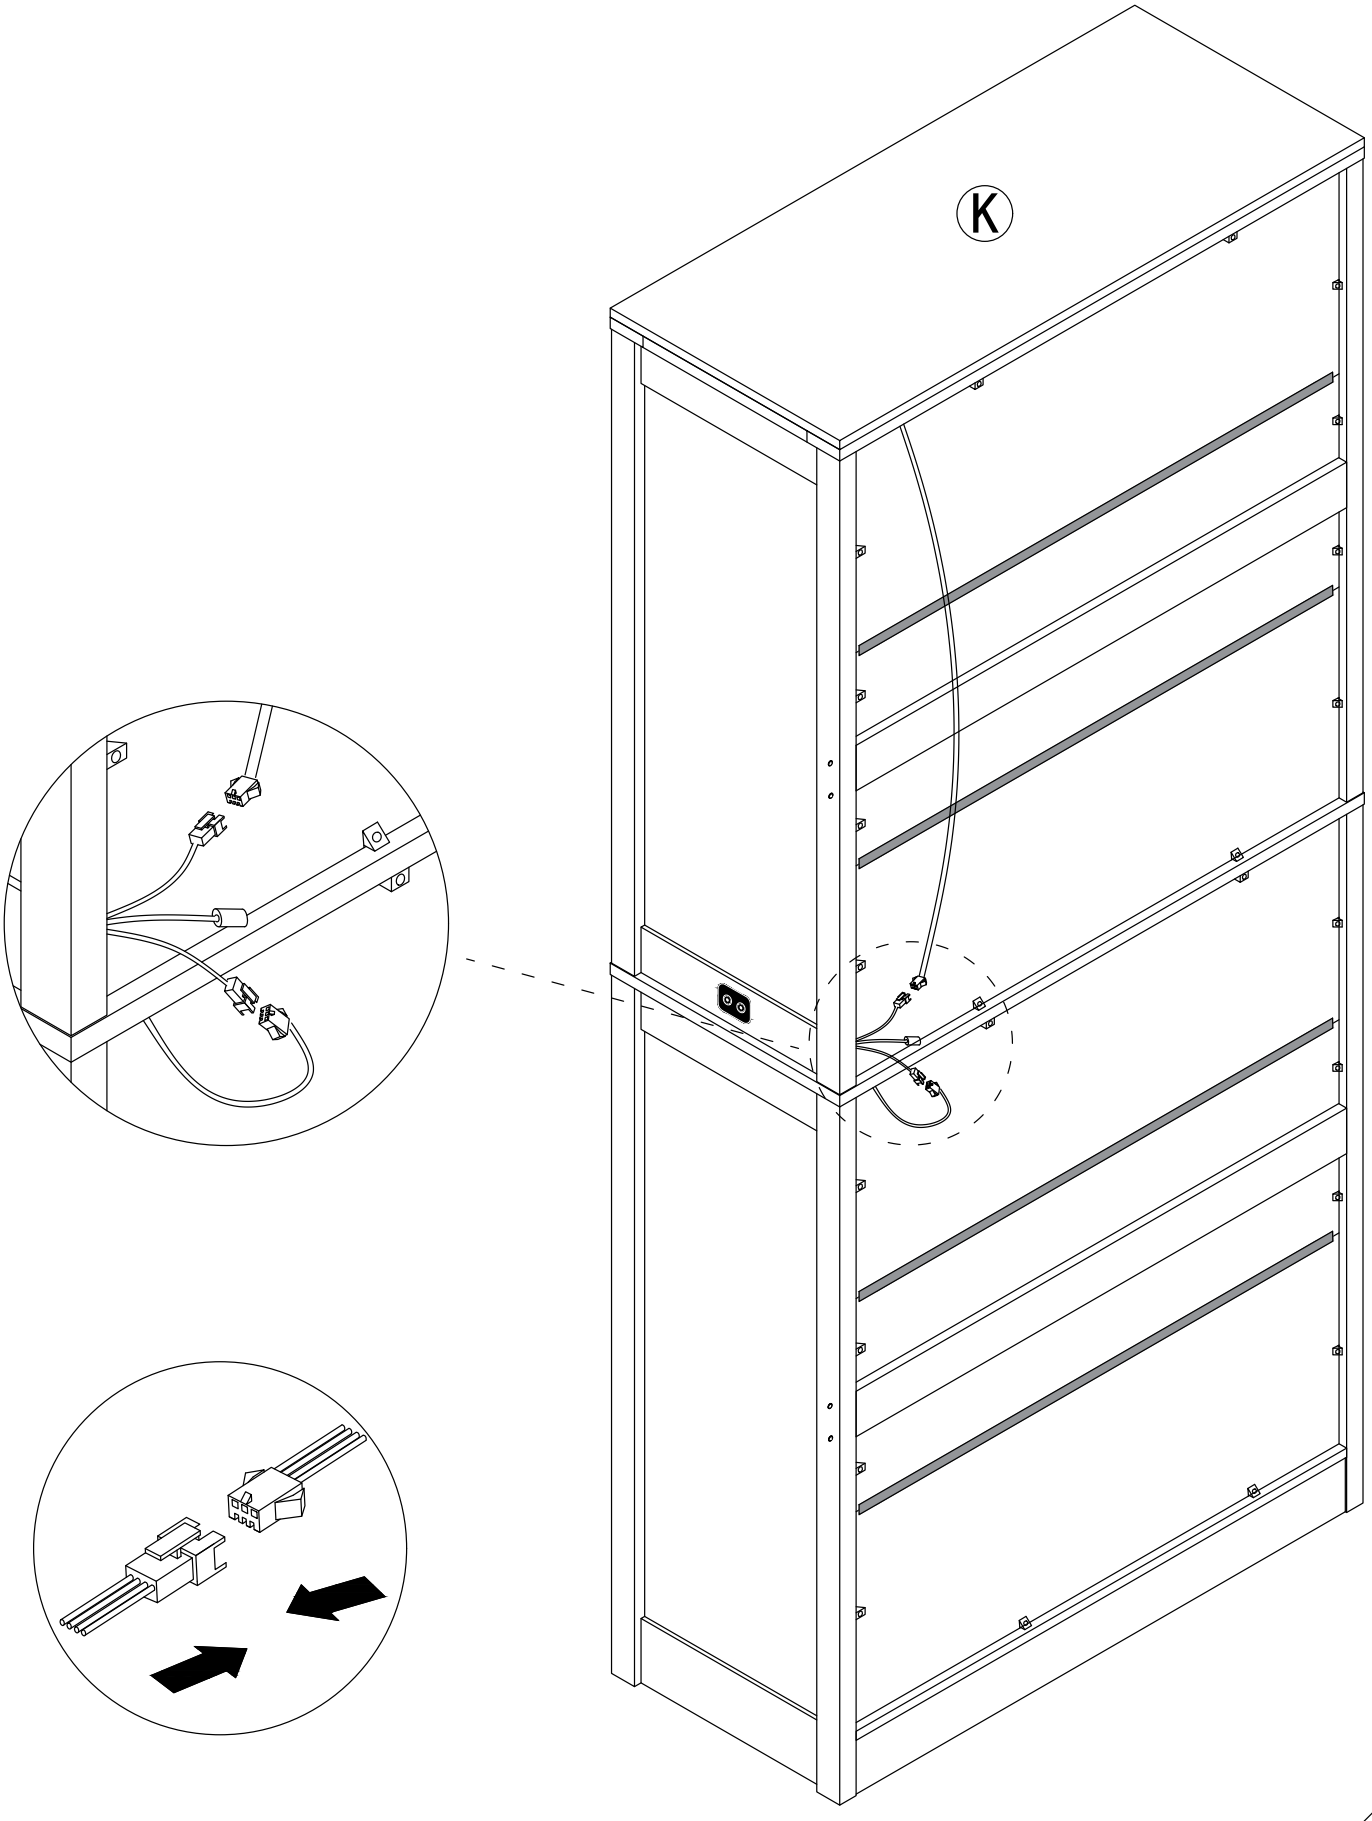


Step 33

7 x2

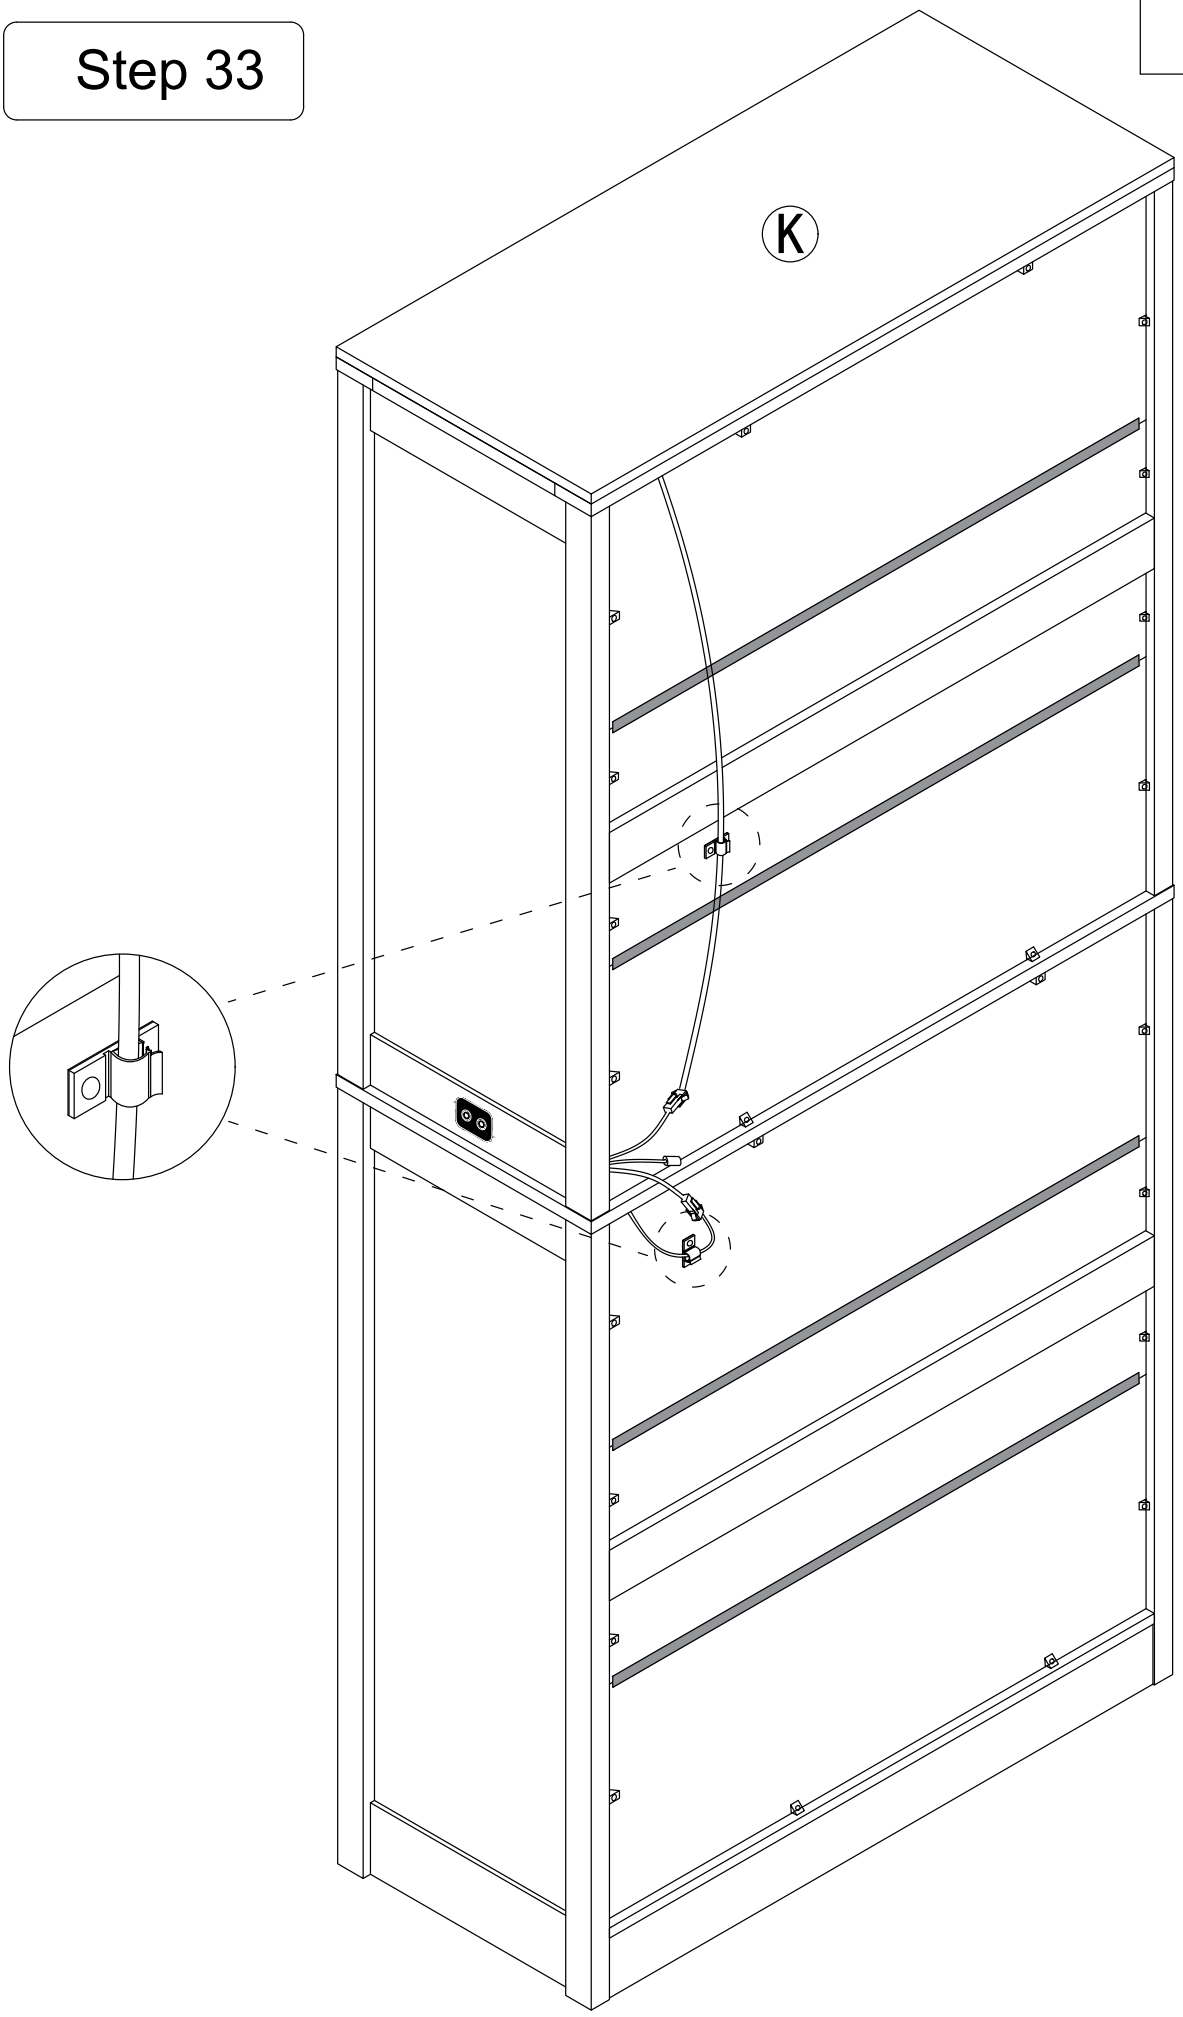


Step 34

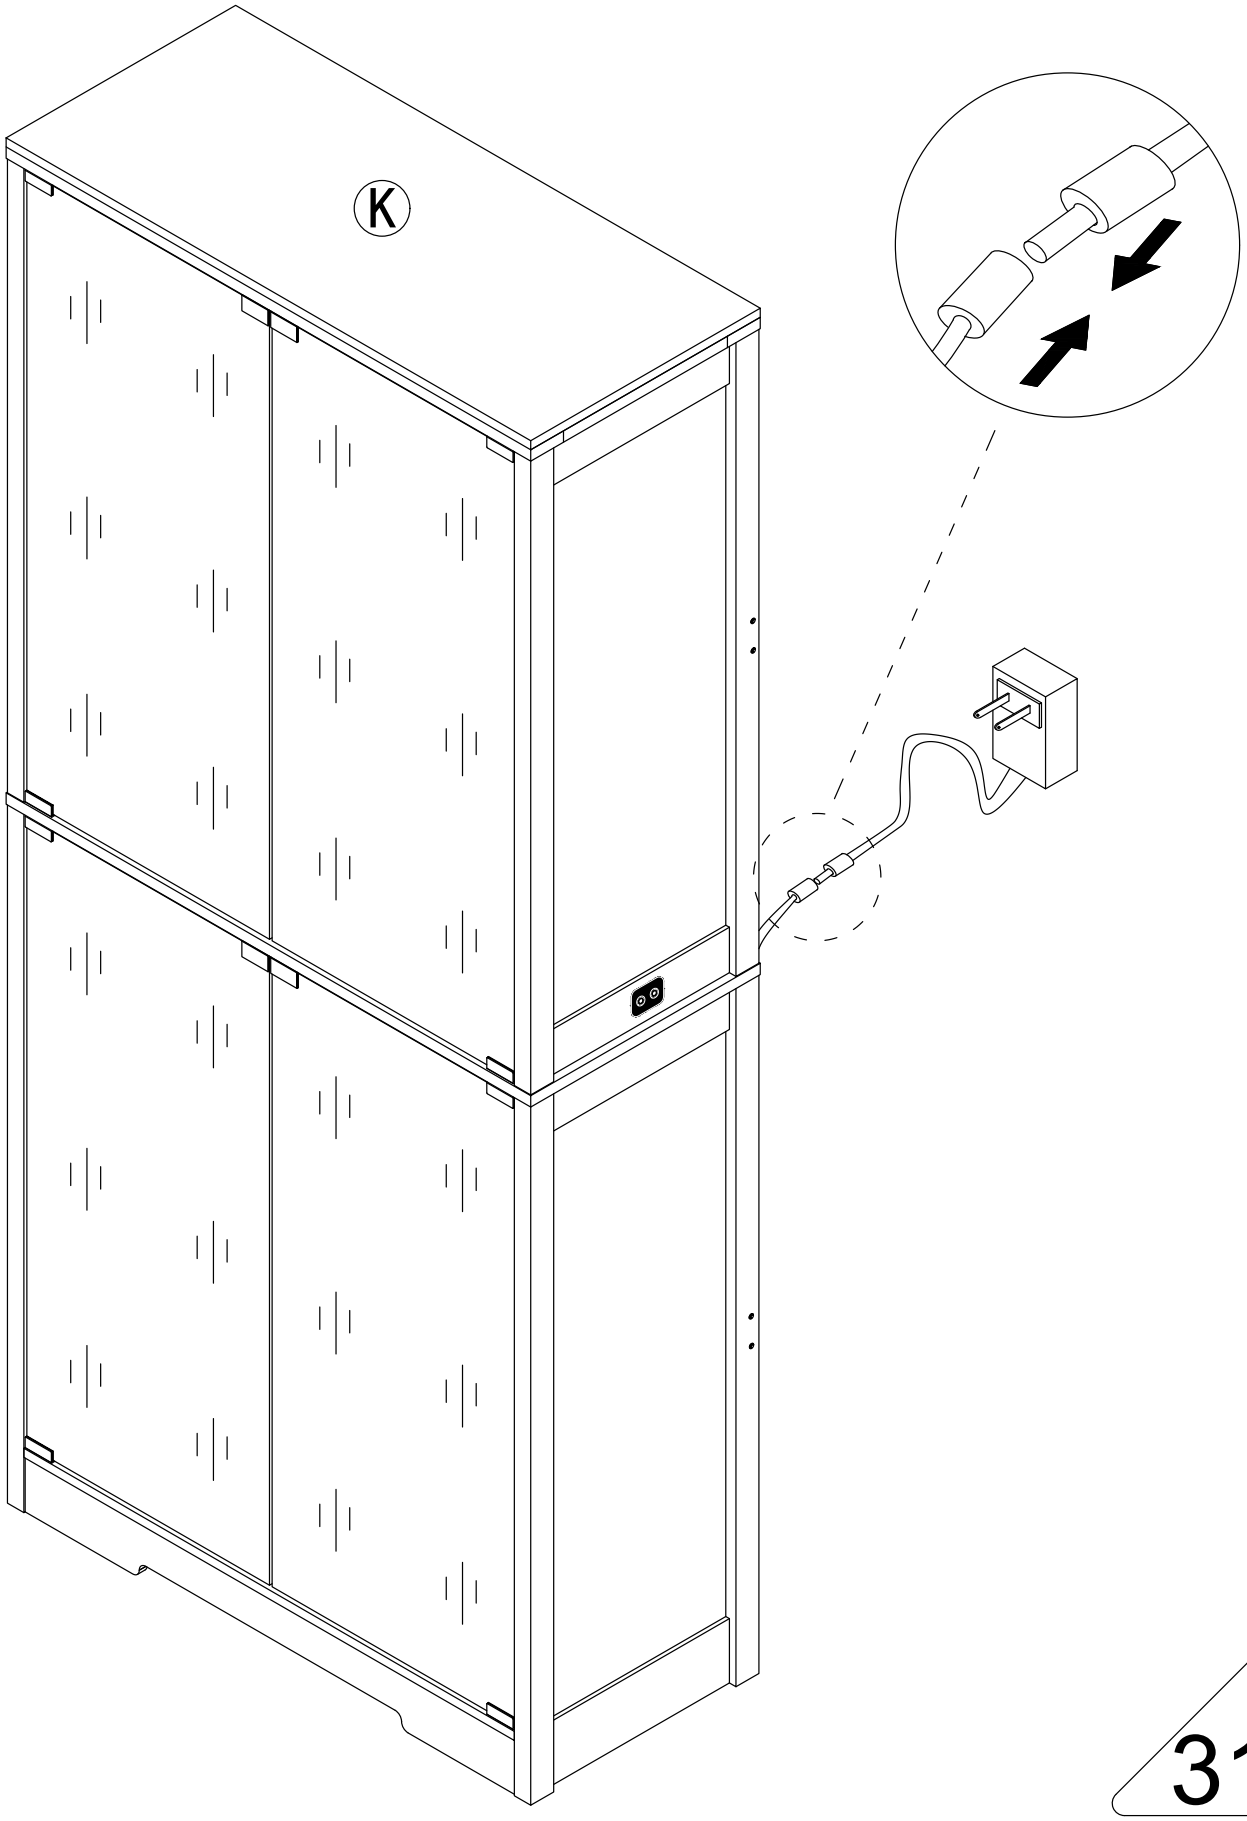


Step 35


Install as required

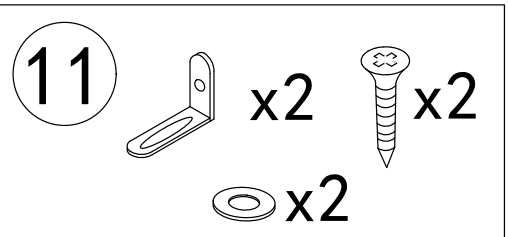



3.5x14mm



Install the anti fall hardware on the cabinet as shown in the picture first

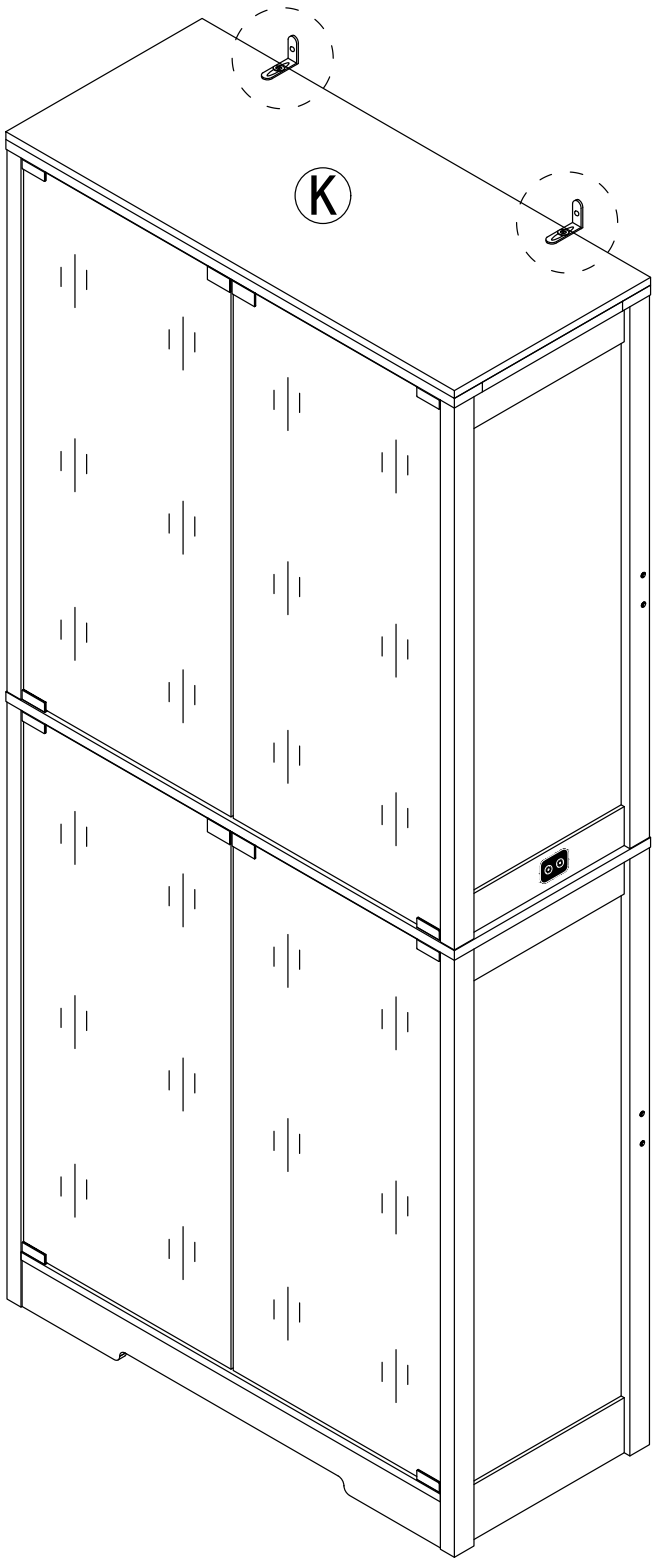






Then mark the wall with a pen through the holes in the anti-fall hardware


Step 36

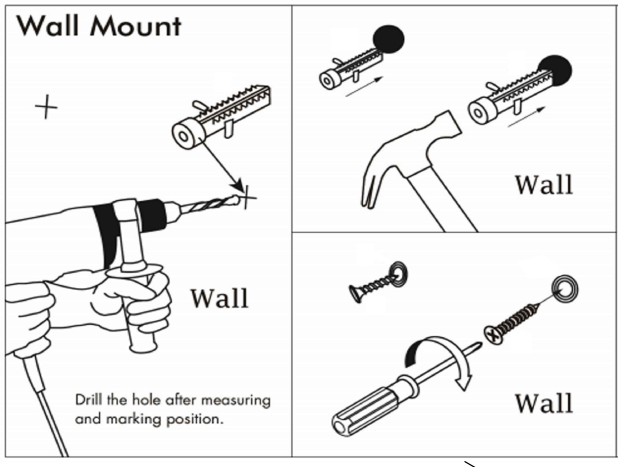



11 x2

x2 x2

Drill the hole with an electric drill and punch in the colloidal particles

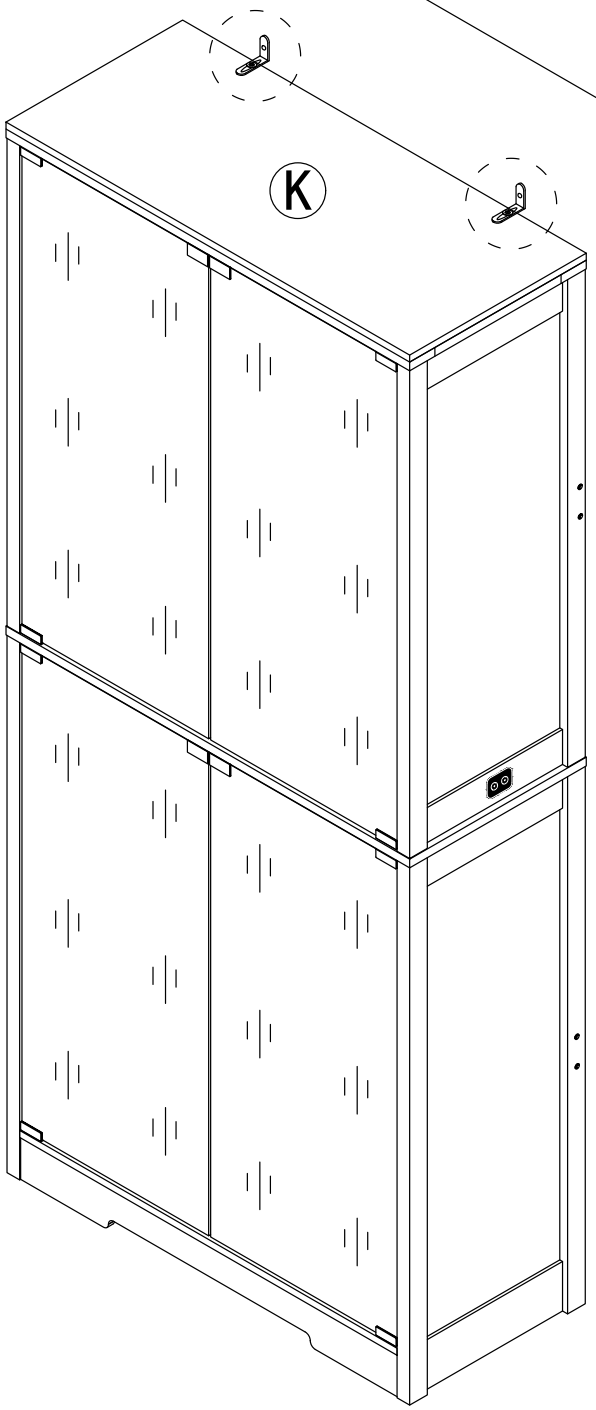






4x45mm

Fix the dressing table to the wall

Step 37

12 x8

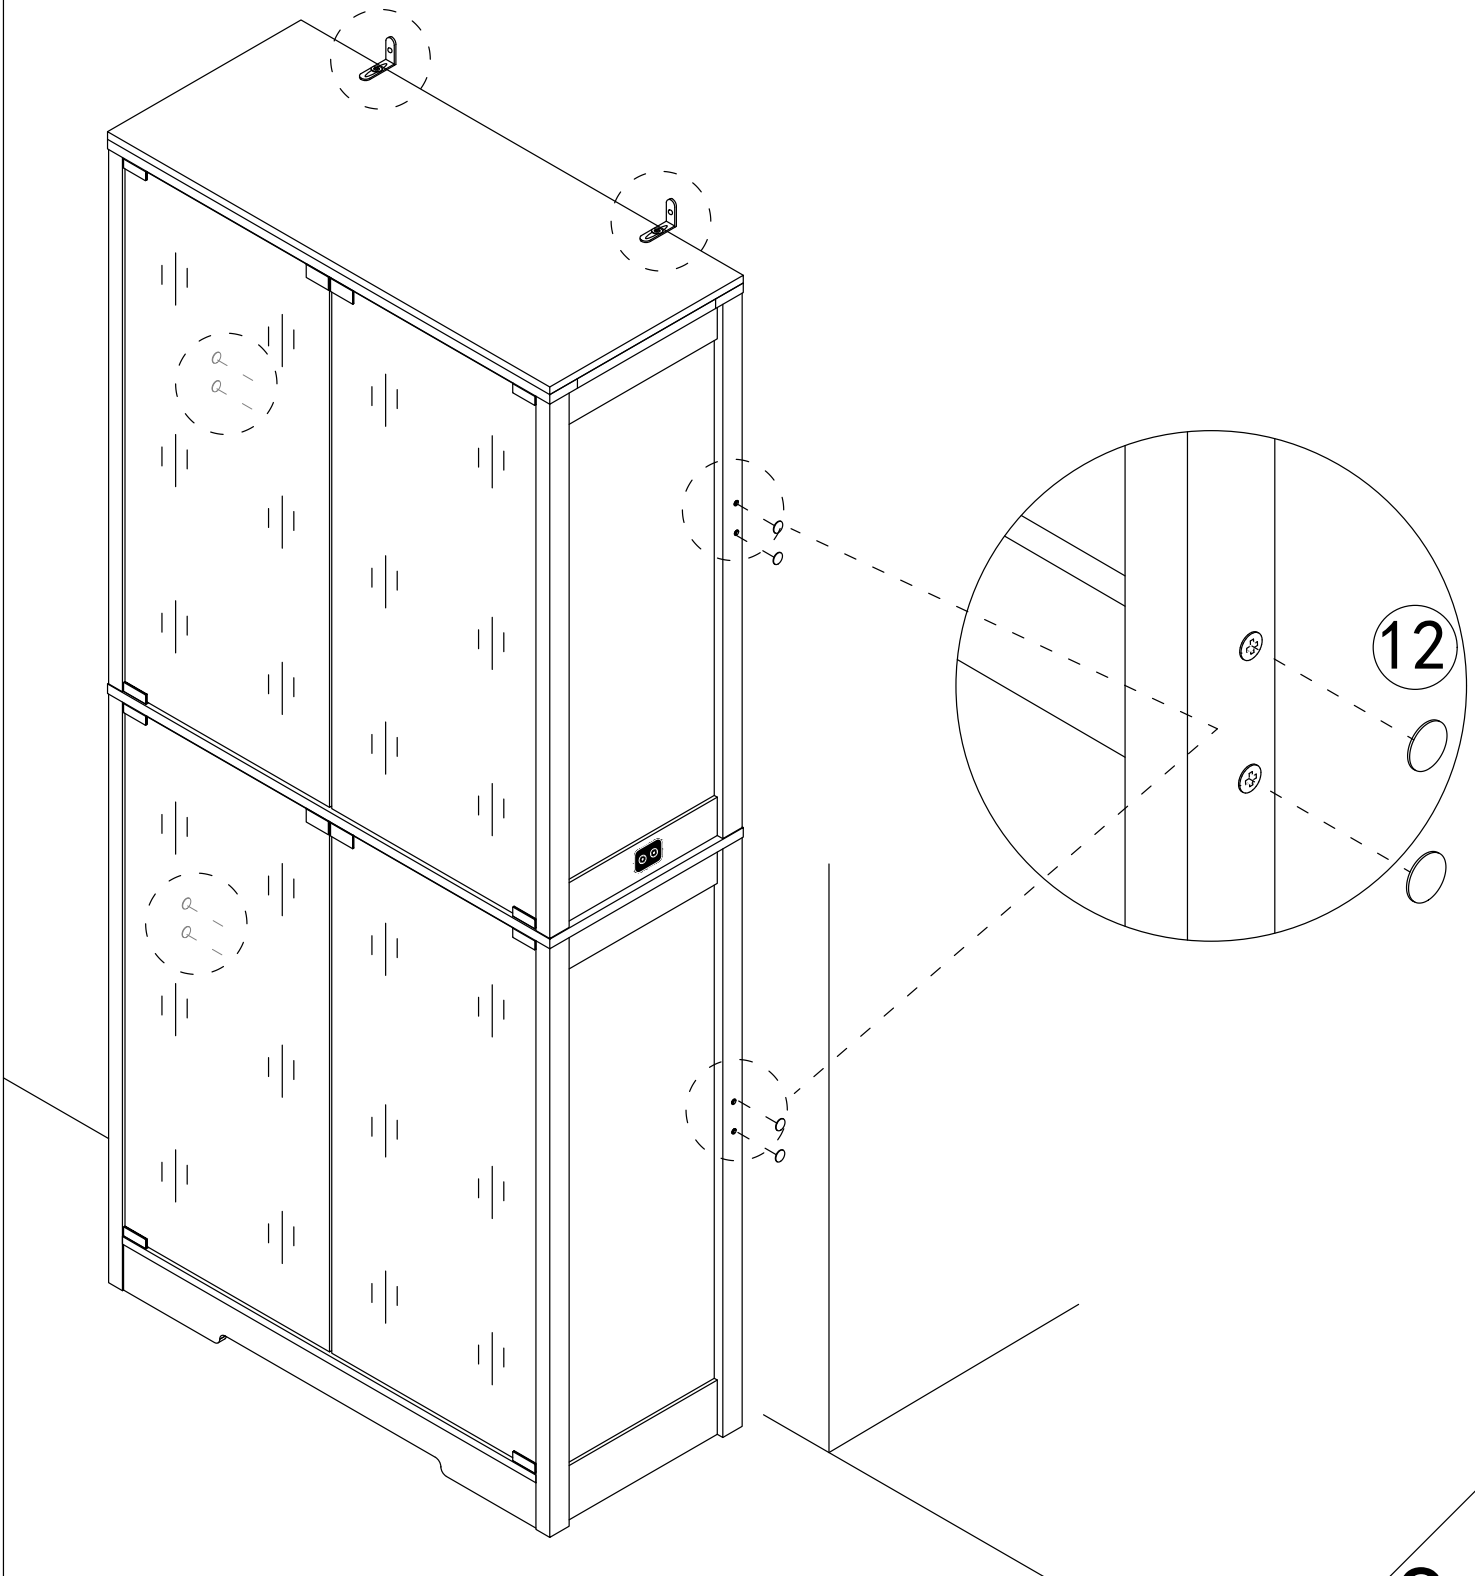

Stick round decorative patches to cover screw holes.


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

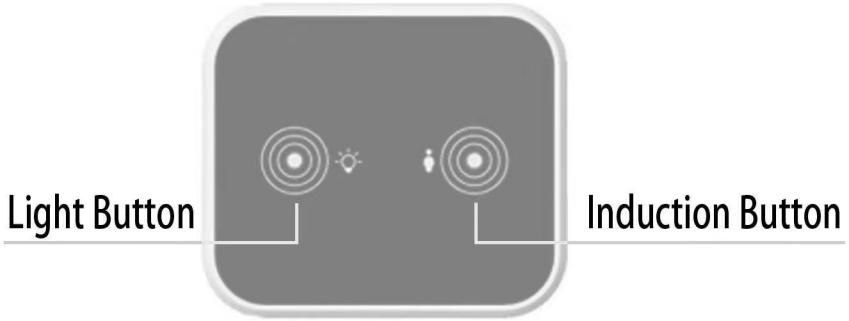

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.