



SLIDING DOORS TERRARIUMS INSTRUCTION MANUAL




PARTS LIST




Base

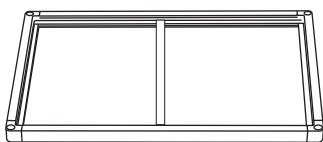


Top Frame

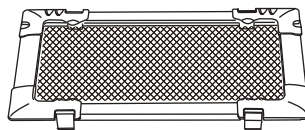


Top Cover (2)




Side Glass (2)

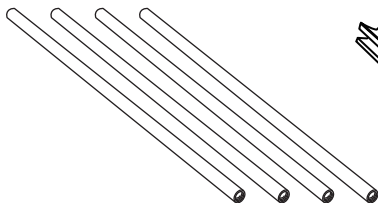

Tubes (4)

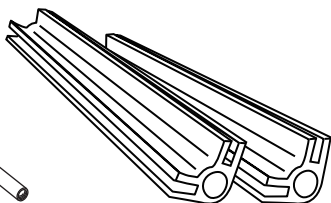

Back Supports (2)

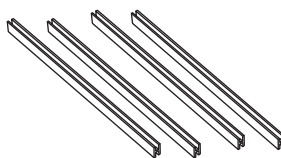

H-Slot (4)



Back Glass (3)



Glass Doors (3)



Screwdriver



Gloves



General Key(2)



Cable Pas




Rubber Caps (4)



Screws (4)



Cable Hole Covers (12)




Front Supports (2)



ASSEMBLY INSTRUCTIONS

Note: 2 ADULTS ASSEMBLY REQUIRED - IN CASE THE BREAK OF GLASS.


1. Install Tubes

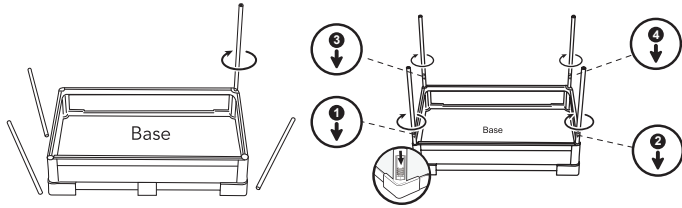

2. Install Back Supports and Front Supports

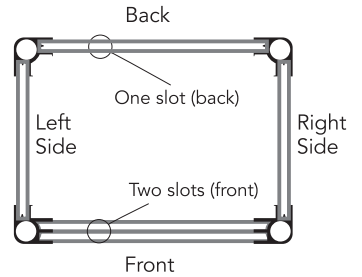



3. Install back glass and side glass

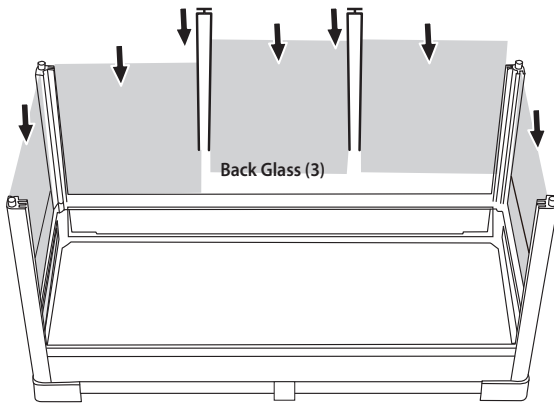


4. Install the front glass doors

★ In order to avoid any damages, you must install any of 2pcs glass doors into the inner and outer slot as FIG.A and FIG.B to the right side, then install the third glass door into the outer slot as FIG.C to the left side.



5. Install top frame and screws

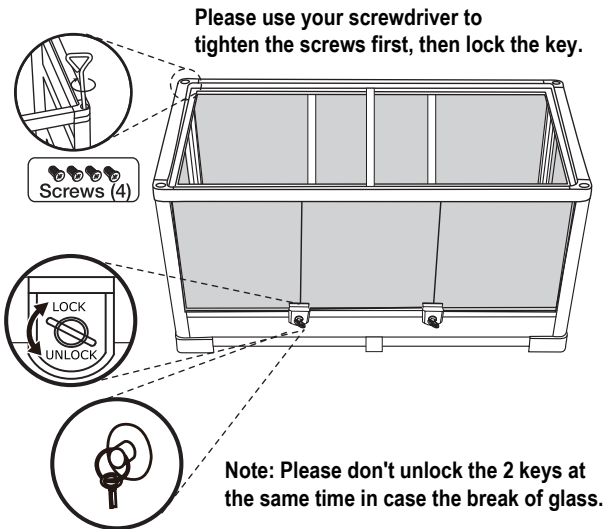


6. Install cable pass onto the side glass panel with the hole drilled

a) Find the cable pass as pictured




b) Turn the cable pass counterclockwise while holding the retaining ring, in order to separate the two pieces

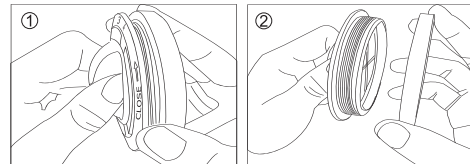


ASSEMBLY INSTRUCTIONS


c) Install the cable pass into the cable hole. From the outer side of the terrarium, insert the cable pass through the cable hole. Hold the cable pass in place while turning the circular ring clockwise onto the cable pass

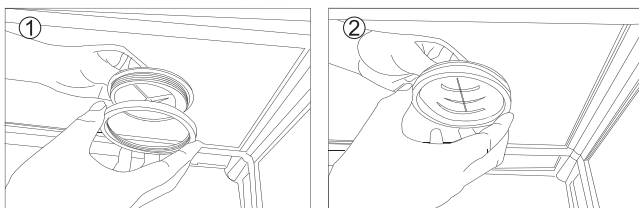

d) Turn the middle piece to make the gap aim at the hole. The middle piece can be removed, or turn the middle piece to align the two arrows, the middle part can be removed

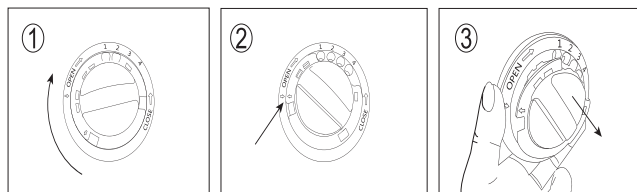


e) Cable pass can be rotated to open or close the different passes. In order to pass power adapters and plugs through the cable pass, the center portion can be removed. When equipment is positioned as desired, the center piece can be reinstalled.

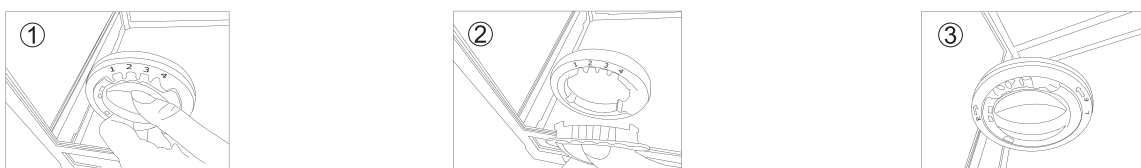

7. Install Top Cover and Rubber Caps

★ Do not open the doors together in case of break of glass.

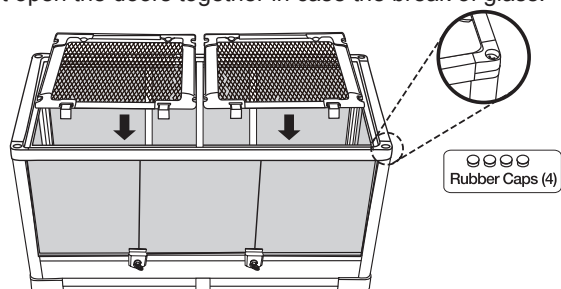

WARNING

The distance between the plastic frame of mesh and the dome edge must be min. 0.4 inch, otherwise the heat lamp may burn the plastic frame.

