


ASSEMBLY AND DRESSING INSTRUCTIONS



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

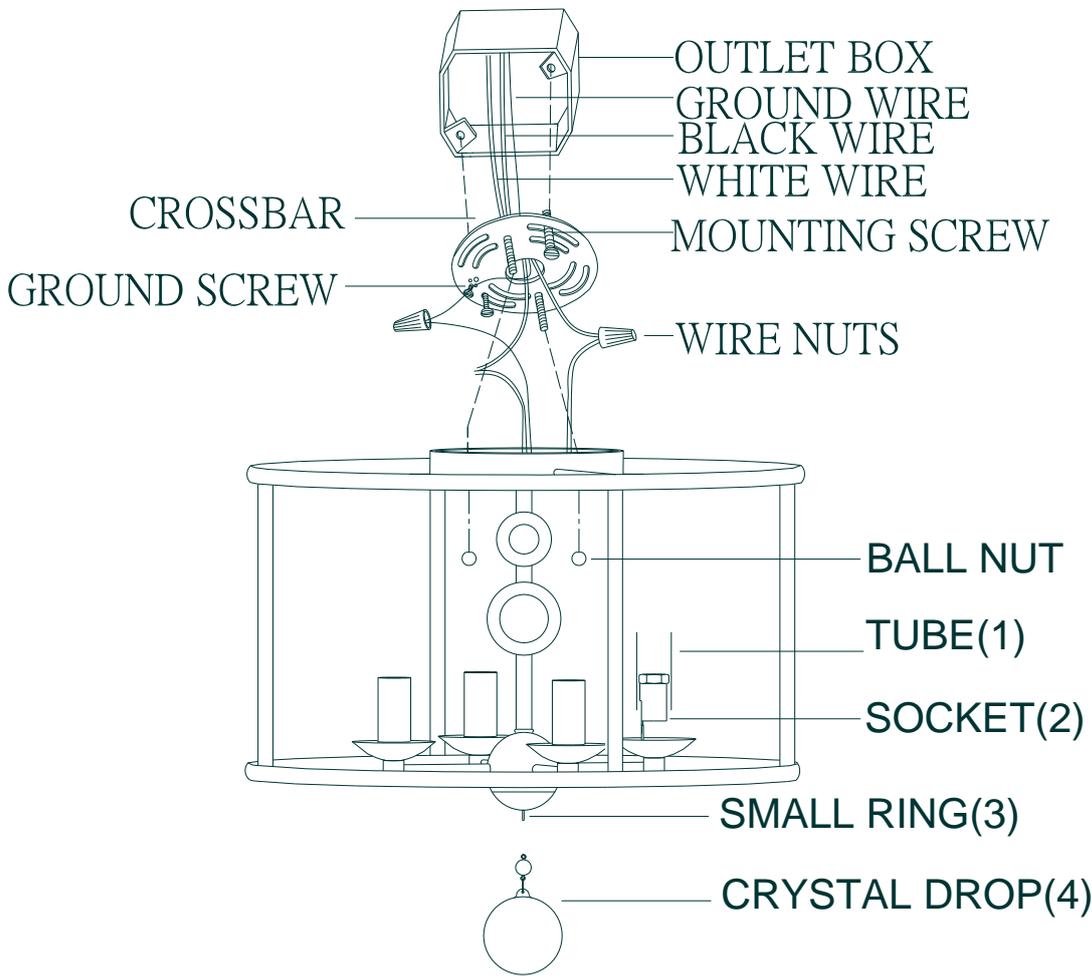

You will need 4-cand. Bulb
60 Watts Recommended
Bulb not included

CRYSTAL DROP(4) = (1X10mm+1X50mm ball)*1pc

FIXTURE ASSEMBLY, MOUNTING, AND WIRING INSTRUCTIONS:

1. Carefully remove the fixture out of the carton and check that all parts are included, referring to the above illustration. Make sure that the electricity is turned off.
2. Thread 2 Mounting screws properly into the relevant mounting holes pre-drilled on the Cross bar;
3. Attach the Cross bar to outlet box using 2 Outlet box screws upwards;
4. Make wire connections:
 - Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
 - Attach ribbed wire from light to white wire from power source with a wire nut.
 - Attach smooth wire from light to black wire from power source with a wire nut.
5. Tuck the wire connection neatly into the outlet box;
6. Attach the fixture body to the ceiling and let the 2 mounting screws protrude through the 2 pre-drilled keyholes on the Canopy, and fix it in place by Ball nuts;
7. Turn power on at fuse or circuit box.
8. Thread stem(2) onto nipple(3) the firsty, then thread stem(2) onto nipple of the swivel(1);
9. Install the tube(1) onto socket(2);
10. Hang the crystal drop(4) onto small ring(3);
11. The fixture is ready for lamping and installation!