

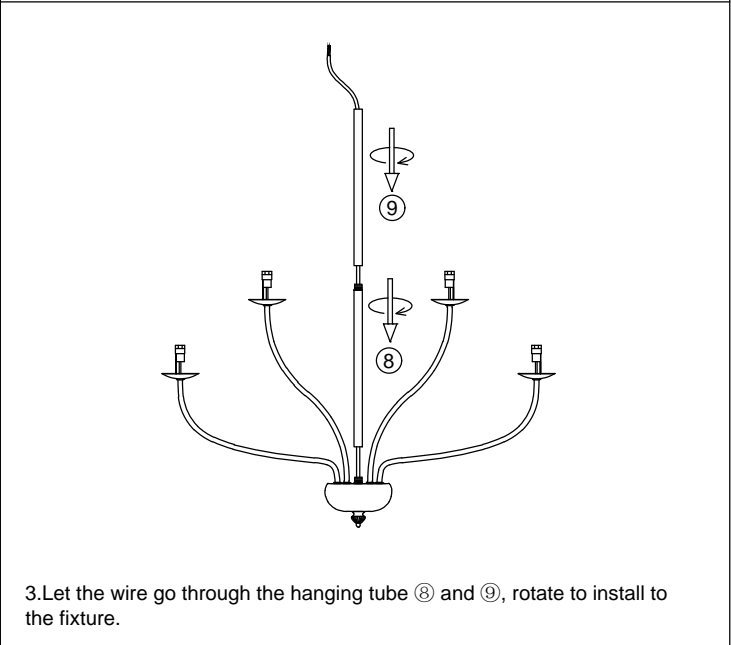
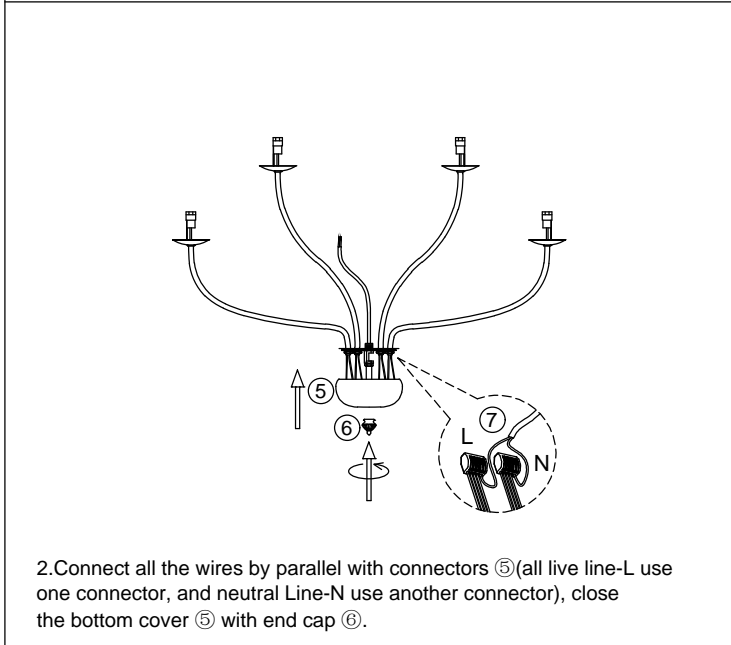


1. Install the light arms on the connected plate ④ with lock nut & teeth lock washer ③.

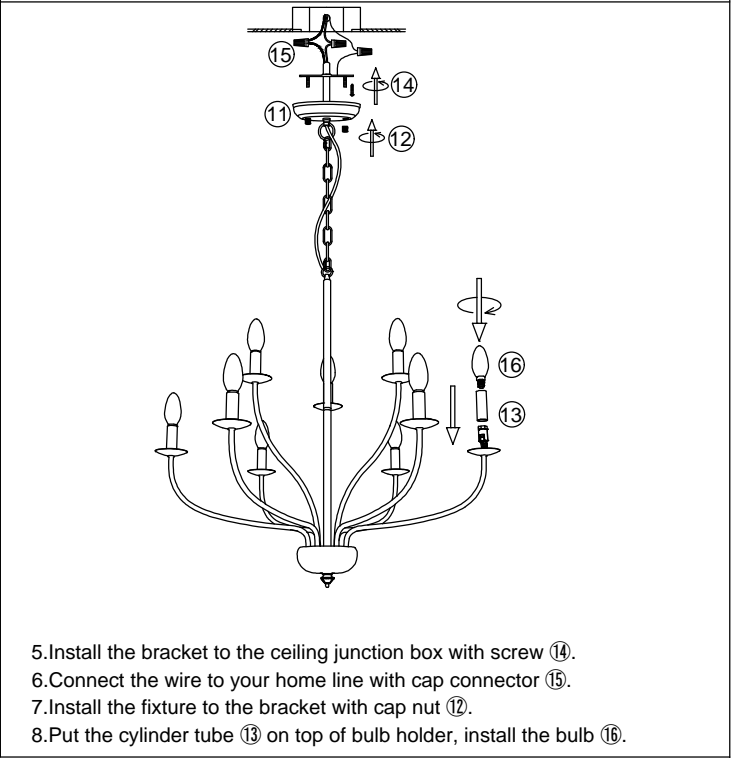

2. Connect all the wires by parallel with connectors ⑤ (all live line-L use one connector, and neutral Line-N use another connector), close the bottom cover ⑤ with end cap ⑥.
3. Let the wire go through the hanging tube ⑧ and ⑨, rotate to install to the fixture.

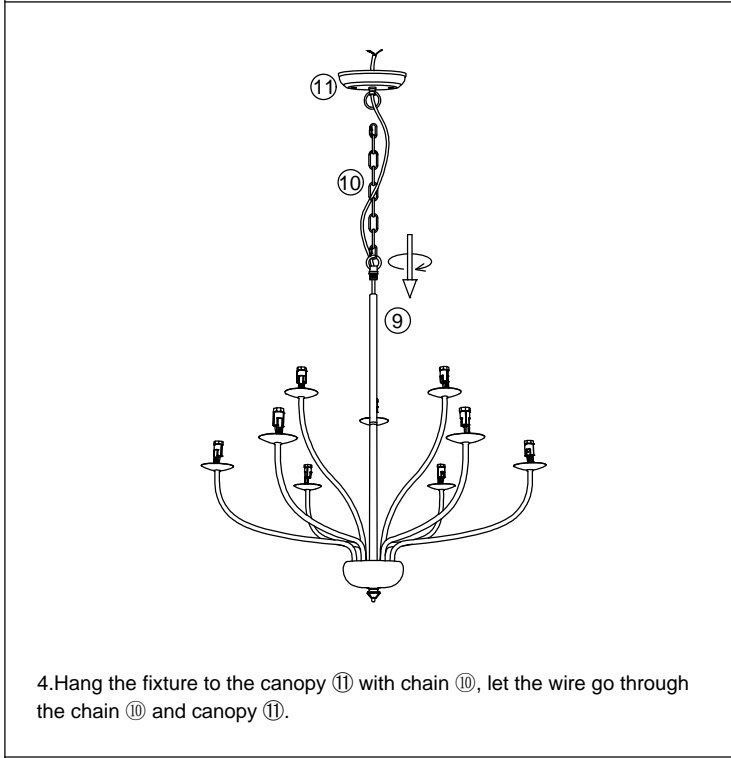

4. Hang the fixture to the canopy ⑪ with chain ⑩, let the wire go through the chain ⑩ and canopy ⑪.
5. Install the bracket to the ceiling junction box with screw ⑭.
6. Connect the wire to your home line with cap connector ⑮.
7. Install the fixture to the bracket with cap nut ⑫.
8. Put the cylinder tube ⑬ on top of bulb holder, install the bulb ⑯.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !