

Instruction

Kitchen Faucet




1. Place all the hoses into the sink hole.



2. Put rubber gasket, steel washer and the nut in sequence upward.



3. Screw the nut in counter-clockwise and then tighten.

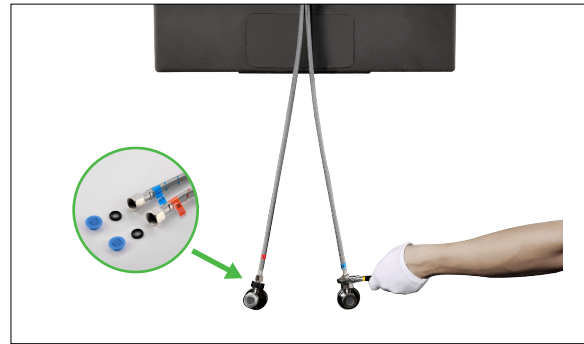

4. Connect the water supply hoses to the angle valves.



5. Clasp the weight to the label "Weight Here".



6. The installation is complete. You can open the handle and check whether there's leaking or not.

TIPS:

- Flush the block and the water supply pipes thoroughly before installation.
- Clean the surface of the faucet regularly.
- Avoid sharp objects and acidic detergent to the surface of the faucet.

If you have any queries about our products, please feel free to contact us.

For the cold&hot supply hoses :

- The two filters are used for preventing the impurities from entering and damaging the faucet.
- If the water flow becomes smaller, then there may be impurities stuck onto the filters.
- Please take the filters out and have them washed thoroughly.

