



Bed legs Assembly

Please insert the bolts in the middle leg holes and tighten up the bolts.

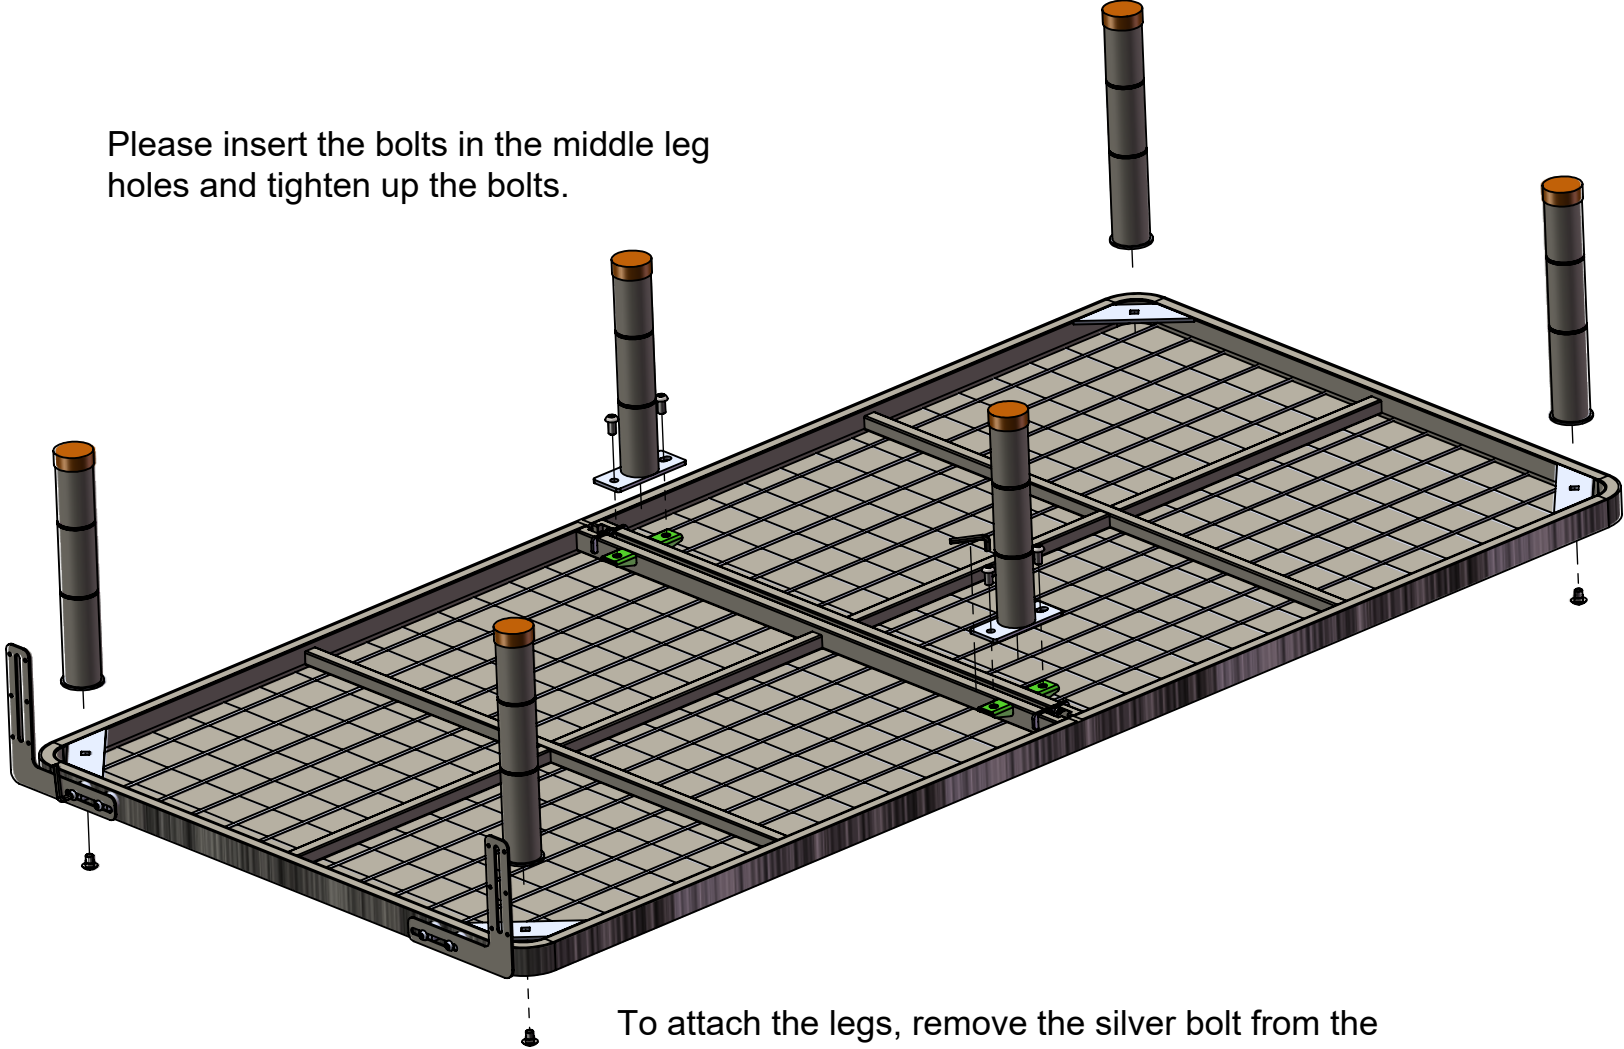

To attach the legs, remove the silver bolt from the end of the leg. Then place the bolt inside the square bolt hole in the frame and turn the leg clockwise on the bolt until tight and secure.


Headboard Bracket and Mattress guard Assembly

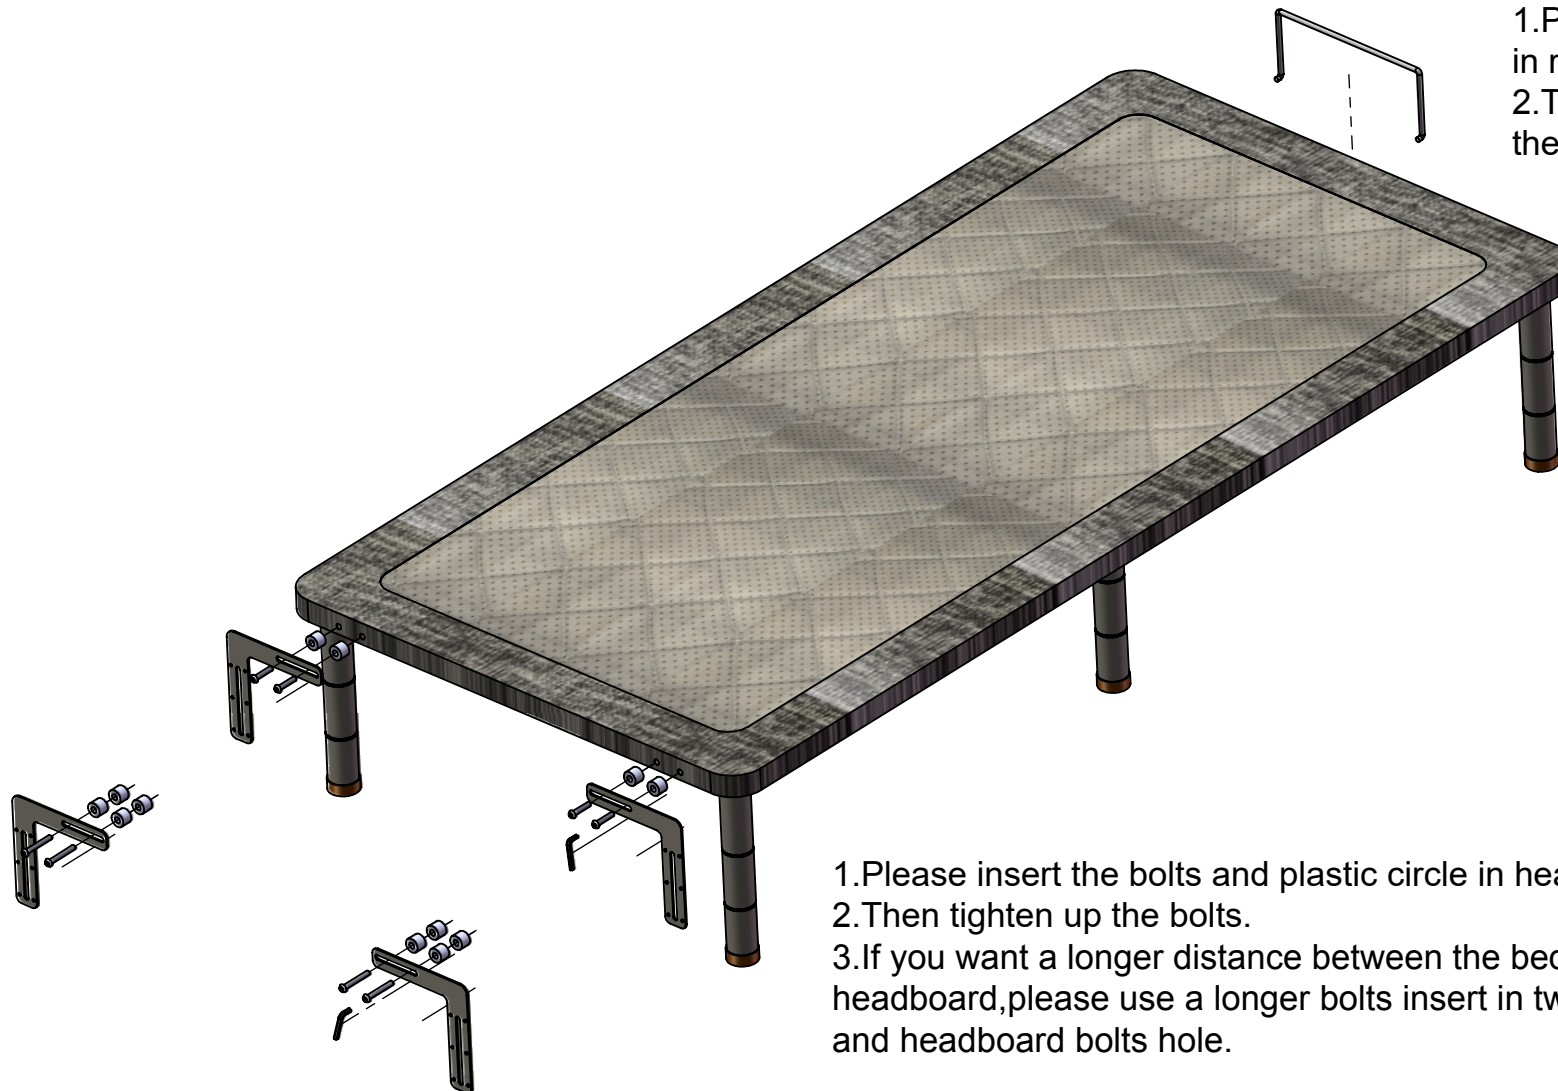

1. Please put the mattress guard in right position.
2. Then fit the mattress guard in the bed hole.

1. Please insert the bolts and plastic circle in headboard bolts hole.
2. Then tighten up the bolts.
3. If you want a longer distance between the bed and the headboard, please use a longer bolts insert in two plastic circles and headboard bolts hole.

Headboard Bracket and Mattress guard Assembly For two twin XL beds

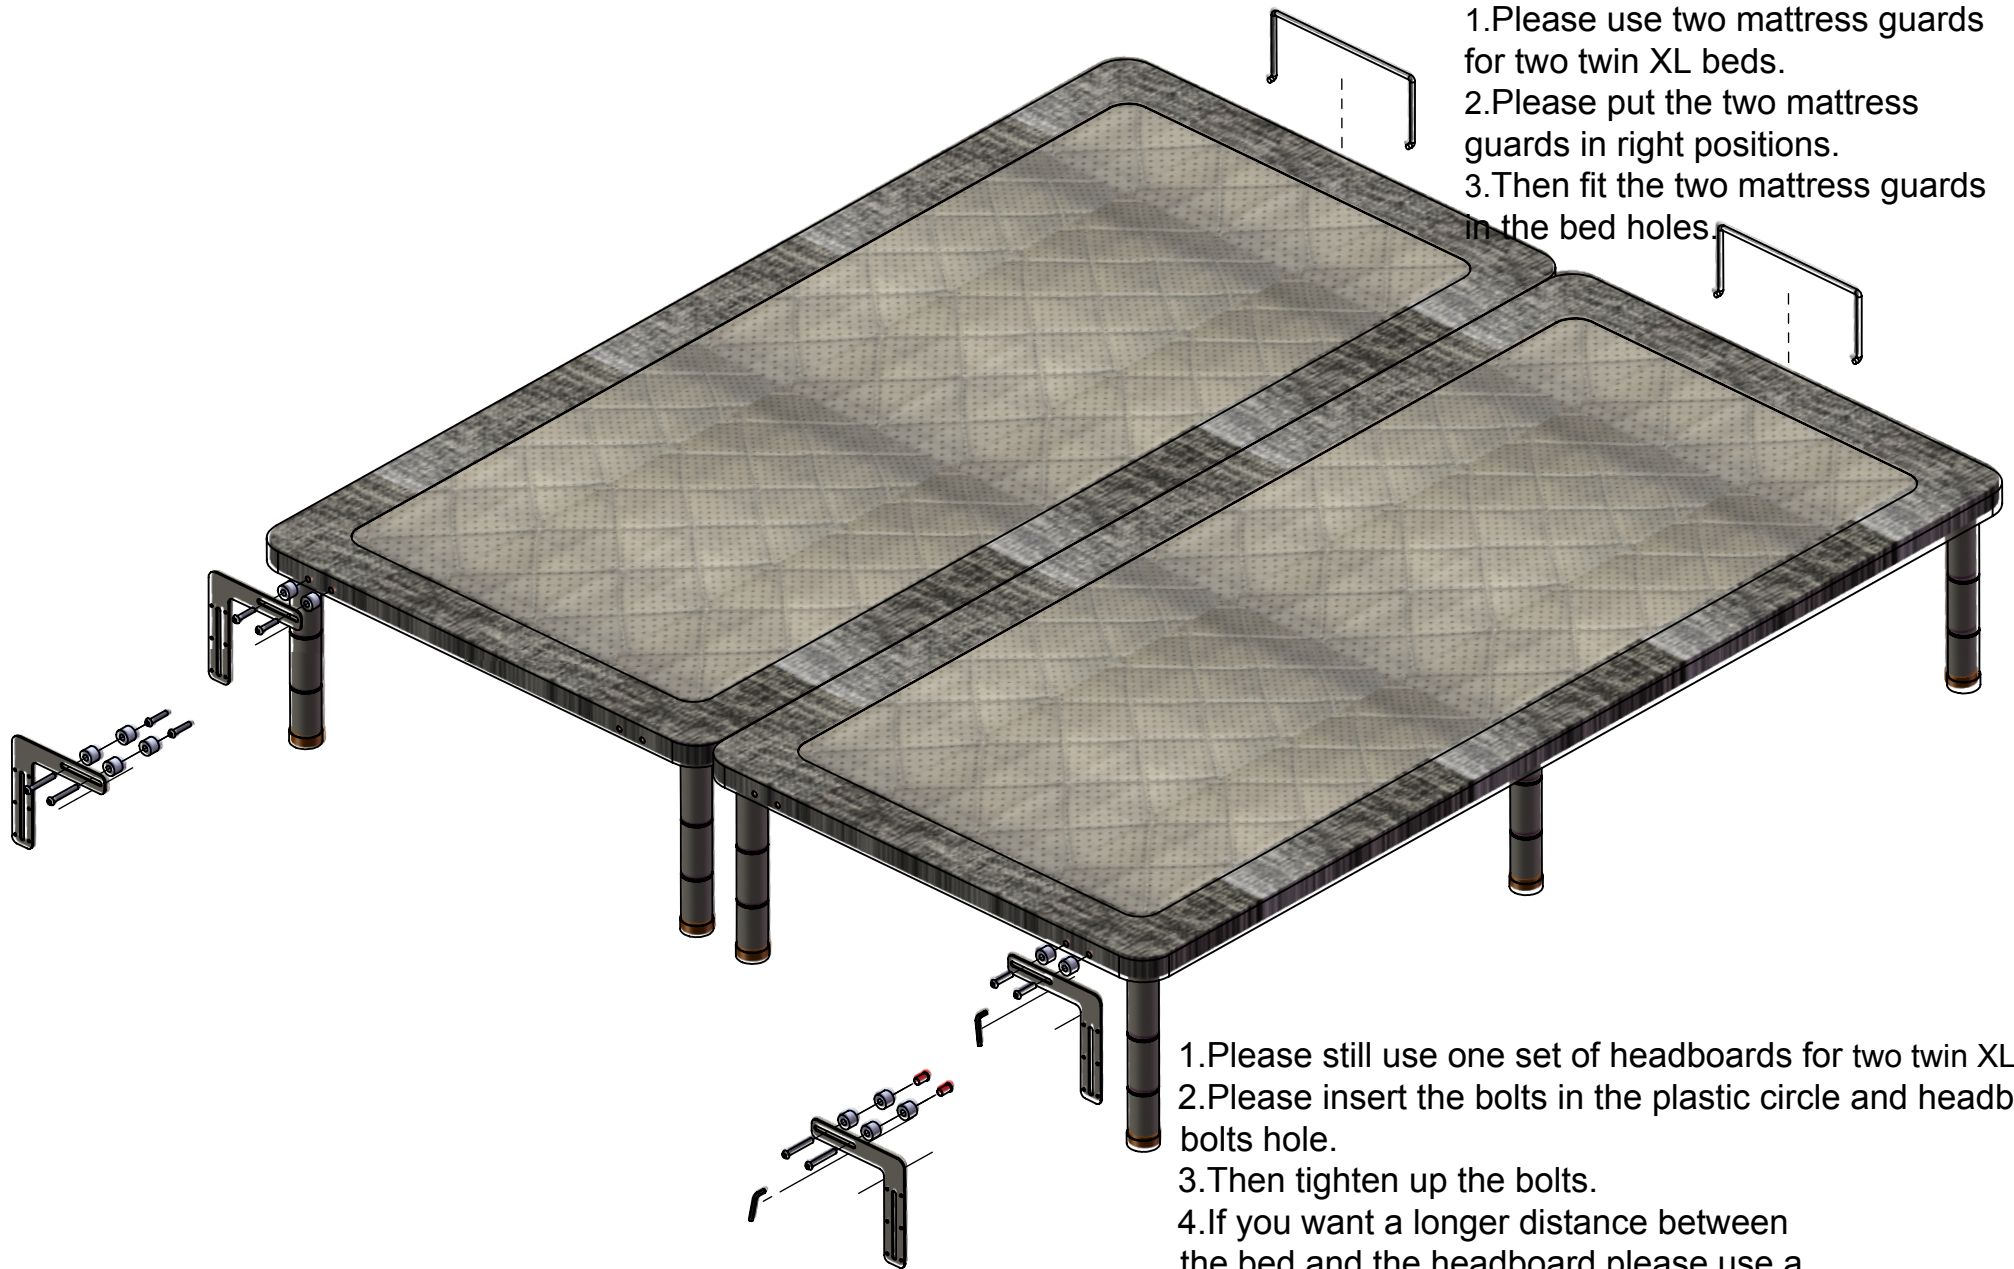

1. Please use two mattress guards for two twin XL beds.
2. Please put the two mattress guards in right positions.
3. Then fit the two mattress guards in the bed holes.

1. Please still use one set of headboards for two twin XL beds.
2. Please insert the bolts in the plastic circle and headboard bolts hole.
3. Then tighten up the bolts.
4. If you want a longer distance between the bed and the headboard, please use a longer bolts insert in two plastic circles and headboard bolts hole.