

FM-30213


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Grommet

FM-30213

PRODUCT DESCRIPTION

An octagonal geometric ceiling luminaire with a chiseled profile. ACLED state of the art technology projects through irresistible mouth blown etched opal glass. Integral coloradjustability allows you to choose warm white, crisp white or cool light for your space.

FEATURES

- ACLED driverless technology
- Octagonal geometric profile
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K,3500K,2700K
CRI	90
Construction	Die cast aluminum body and mouth blown opal glass shade


REPLACEMENT PARTS

RPL-GLA-30213 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-30213 13"	2700K	AB Aged Brass	21W	1800	1051
	3000K	AB Aged Brass	21W	1800	1120
	3500K	AB Aged Brass	21W	1800	1136

Example: **FM-30213-35-AB**

For custom requests please contact customs@modernforms.com

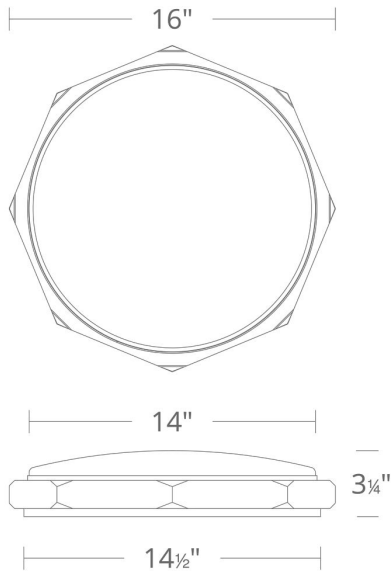

FM-30216


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Grommet

FM-30216

PRODUCT DESCRIPTION

An octagonal geometric ceiling luminaire with a chiseled profile. ACLED state of the art technology projects through irresistible mouth blown etched opal glass. Integral coloradjustability allows you to choose warm white, crisp white or cool light for your space.

FEATURES

- ACLED driverless technology
- Octagonal geometric profile
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	2700K,3500K,3000K
CRI	90
Construction	Die cast aluminum body and mouth blown opal glass shade

REPLACEMENT PARTS

RPL-GLA-30216 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-30216 16"	2700K	AB Aged Brass	27W	2400	1534
	2700K	BN Brushed Nickel	27W	2400	1534
	2700K	PN Polished Nickel	27W	2400	1534
	3000K	AB Aged Brass	27W	2400	1639
	3000K	BN Brushed Nickel	27W	2400	1639
	3000K	PN Polished Nickel	27W	2400	1639
	3500K	AB Aged Brass	27W	2400	1649
	3500K	BN Brushed Nickel	27W	2400	1649
	3500K	PN Polished Nickel	27W	2400	1649

Example: **FM-30216-35-PN**

For custom requests please contact customs@modernforms.com