

Pendant Light

5-light square pendant light


Assembly Instructions

ARTS TYPE & QTY INCLUDING:

Item No.	Component Description	Quantity
C	Mounting Bracket	x 1
D	Grounding screw	x 1
E	Canopy	x 1
F	Loop	x 4
G	Quick link	x 2
H	Nut	x 2
I	6" Iron pipe	x 4
J	12" Iron pipe	x 6
K	Crystal	x 28
L	Lamp body	x 1

ARTS TYPE & QTY INCLUDING:

B	Mouting Screw	x 2
A	Wire Connector	x 3

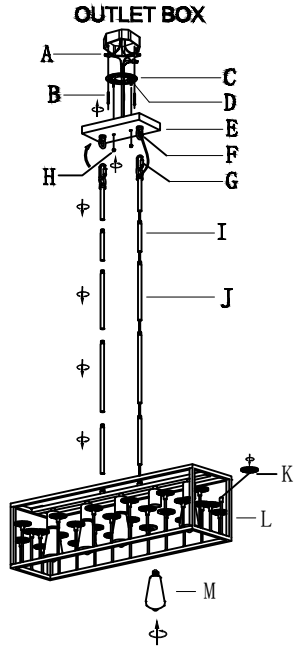

WARNING & INSTALLATION INSTRUCTIONS(To reduce the risk of fire, electric shock, or injury to persons):

- 1.We suggest installation by a licensed electrician.
- 2.Please read the instruction carefully and save it as you may need it at later time.
- 3.Before you start, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in yourhome. Place the main power switch in the "OFF"position. B). Place the wall switch in the "OFF" position.
- 4.Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopyexceeding 3/16" should be corrected as required.
- 5.Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
- 6.Make sure the voltage you are using is110V.The bulb shape is Type A.Max 60W per bulb.
- 7.Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
- 8.When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9.The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense,caution and care must be used with any electrical products.
- 10.Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

INSTALLATION STEPS:

①	② OUTLET BOX
Step 1:Remove the Mounting Bracket (C) from the canopy (E) .	Step 2: Mount the mounting plate (C) onto the outlet box with mounting screw (B).
③	④
Step 3: pass the wire through the 12" iron pipe (J) and 6" iron pipe (I), then tighten the iron pipe onto the lamp body (L)	Step 4: Connect the canopy (E) and the iron pipe (I) with the quick link (G).

5

1/2 inch
exposed wire

6

CEILING

Step 5: Connect the lamp body wires to the main wire in the outlet


Step 6: Mount the canopy (E) on the wall and secure it using the nut (H)

7

8

Step 7: Install the crystal (K) onto the Lamp body (L).

Step 8: Install the Bulb(Bulb not included)

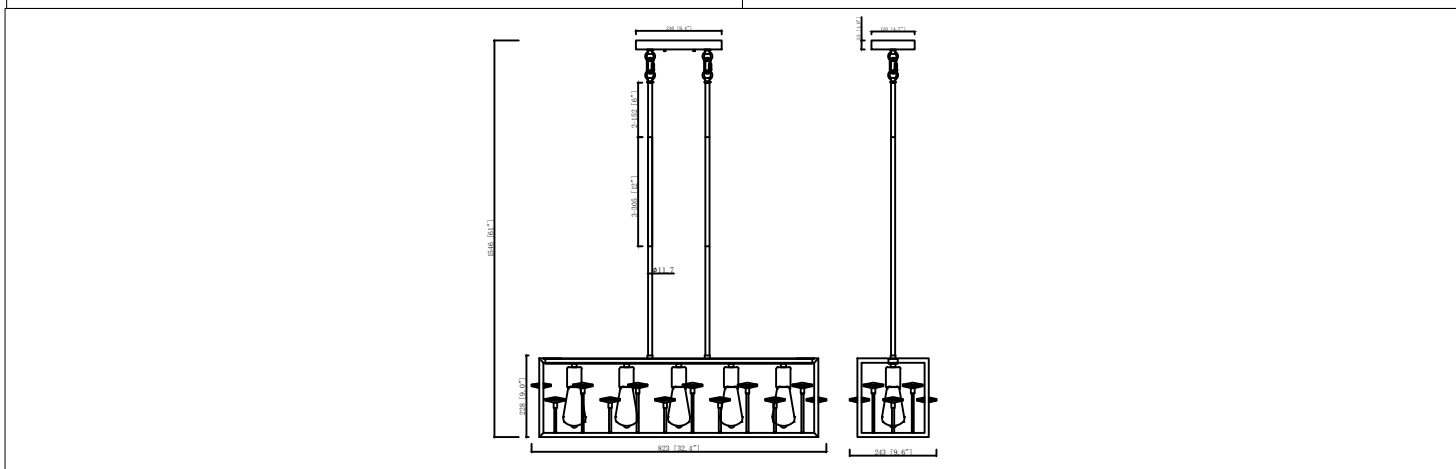

Connect ground wires according to the below

A

B

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire

Twist wires together with plastic wire connectors until tightly joined, and wrap each connector with approved electrical tape. Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

Check everything is installed properly then you could turn on the light. Enjoy!

CLEANING

To clean, wipe the fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

After-Sales Service:

If you have any questions during installation or use, feel free to contact us anytime via our service email. Service Email: info@taloya.com