MOEN[®]

Model Number	Faucet Holes	Depth- Inches	Drain Placement	ADA/FHA Compliant*
GS201961BQ	1	7"	Rear	FHA
GS201962BQ	2	7"	Rear	FHA
GS201963BQ (pictured)	3	7"	Rear	FHA
GS201964BQ	4	7"	Rear	FHA
GS201964Q	4	7"	Center	No
GS201974LQ	4	5-1/2"	Rear (Left)	ADA/FHA
GS201974RQ	4	5-1/2"	Rear (Right)	ADA/FHA
GS201974BQ	4	5-1/2"	Rear (Center)	ADA/FHA


SINK DESCRIPTION

- 2000 Series single bowl drop-in sink
- 20 gauge stainless steel, matte bowl finish
- U-channel mounting system, hardware included
- QuickMount[™] installation included
- SoundSHIELD™ sound absorbing system


WARRANTY

- · Lifetime limited warranty to the original homeowner
- 10 year limited warranty when used in a Multi-family installation
- 5 year limited warranty when used in a Commercial installation
- Visit www.moen.com/customer-support/warranty for complete details and limitations

CRITICAL DIMENSIONS

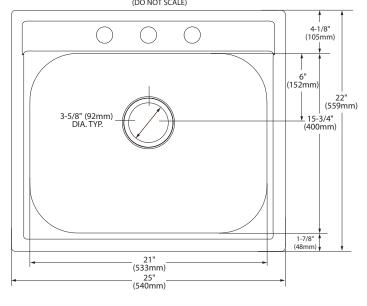


Installation Detail





Specifications



SINK DIMENSIONS

- Overall: 25" x 22"
- Bowl: 21" x 15-3/4"
- Drain Size: 3-5/8"
- Faucet Holes
 - 1-1/2" (38mm) diameter
 - 4" (102mm) center
 - 8" (203mm) centers for 2 hole


CUT OUT DIMENSIONS

• 24-3/8" x 21-5/8" with 1-1/2" corner radius, tolerance of plus or minus 1/16" is acceptable

STANDARDS

- Third party certified to meet ASME A112.19.3/CSA B45.4 and all applicable specifications referenced therein
- *ADA/FHA Sink compliant to ADA (ICC A117.1) and FHA
 accessibility specifications when installed to these required standards.
 Always consult with your local building department for the specific
 installation requirements.
- *FHA Sink compliant to FHA accessibility specifications when installed to these required standards. Always consult with your local building department for the specific installation requirements.

Faucet Hole Configurations



Left Rear Configuration

