

**Features**

- Reduces dirt, sand and rust in drinking water.
- Filter head automatically turns off water supply when cartridge is removed.
- Replacing RO sediment pre-filter every six months keeps filtration system performing effectively.
- Postage-paid recycling program for used cartridges to reduce solid waste to landfills.
- For cold water use only.

**Material**

- High-impact plastic construction.

**Installation**

- Under-sink.
- Quarter-turn twist cartridge for easy installation and replacement.


**Codes/Standards**

CSA B483.1  
NSF/ANSI 42


**KOHLER® Water Filter Systems****Five-Year Limited Warranty**

See website for detailed warranty information.

Ø 2-1/4"  
(57 mm)

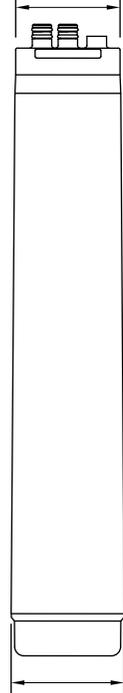

Ø 2-7/16"  
(62 mm)

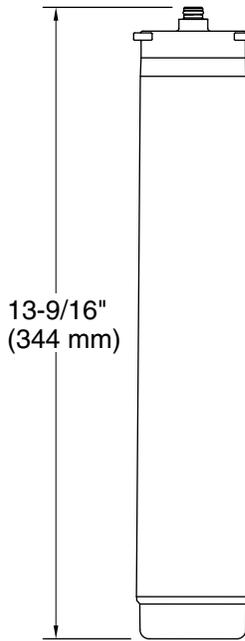

13-9/16"  
(344 mm)

### Technical Information

All product dimensions are nominal.

Drain included: No

### Notes

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:  
Water Pressure: 40-100 psi (276-689 kPa) Water  
Temperature: 40-100°F (4.4-37.8°C)