


### **IMPORTANT SAFETY INSTRUCTIONS**

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.

### **INSTALLATION INSTRUCTIONS**

1. Secure Mounting Plate (A) to junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Canopy Screws (C) pointing away from the junction box.
2. Place Canopy (E) against the ceiling by inserting Canopy Screws (C) through appropriate holes located on Canopy (E). Adjust Canopy Screws (C) and hex nuts until 1/4" of the threaded portion is visible. Remove Canopy (E) once Canopy Screws (C) have been adjusted.
3. Ensure Downrod (G) is secured to Canopy (E). Thread wire from Nipple (H) through Downrod (G) and Canopy (E). Screw Downrod (G) onto Nipple (H) by turning in clockwise direction.
4. Install light bulbs (not included).
5. Remove Finial (O), Cap (N), Hex Nut (M), one Metal Washer (P) and one Plastic Washer (L) from Screw Stem (J).
6. Attach Diffuser (K) onto Screw Stem (J), ensuring it sits flat on the remaining Plastic Washer (L). Secure Diffuser (K) in place with removed Plastic Washer (L), Metal Washer (P) and Hex Nut (M). Attach Cap (N) and Finial (O).  
**Note: If there is not enough space to safely secure Finial (O), unscrew the nipple on the "Glass End" of Screw Stem (J) to lengthen it.**
7. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (D).

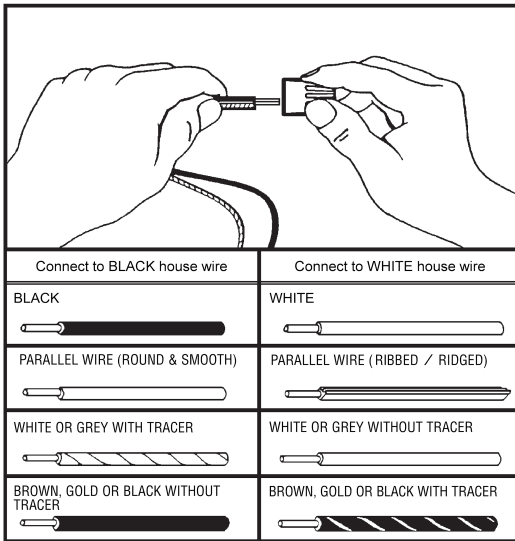

- A.** Connect the ground wire (bare copper or green) from your fixture to the:
- 1) ground wire in the junction box, or
  - 2) ground screw in the junction box
- B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

**8.** Secure Canopy (E) to Mounting Plate (A) using Decorative Caps (F).

Enjoy your new fixture!

**HELPFUL TOOLS:** Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Measuring Tape, Chain Pliers

