

WARNING

**** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN ****

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed














CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS


- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this luminaire cannot be replaced
If the cord is damaged, the luminaire shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	H	Short Stem		2X
B	Mounting Screw (5/32-32T*25)		2X	I	Long Stem		2X
C	Mounting Screw 5/32-32T*35		2X	J	Light Body		1X
D	Wire Connector		3X	K	Bulb		12X
E	Canopy Nut		2X	L	Clear Glass		12X
F	Ground Screw 5/32-32T*5		1X	M	Coronet Screw		36X
G	Canopy		1X				

Owner Manual


Product Dimensions:30.5"LX30.5"W X 24.5-54.5"H

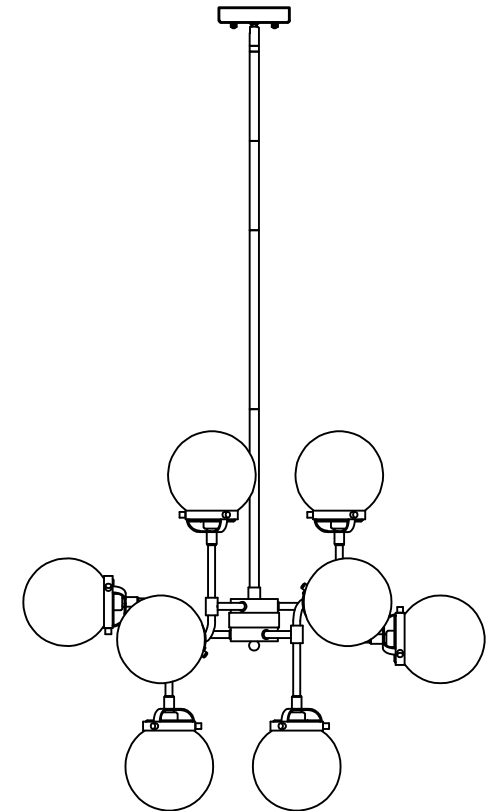


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 30 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help.



NOTE:PLEASE USE ON/OFF TYPE"B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED BULB MAX 9-WATT THERE IS LED 4-WATT BULB IN THE BOX

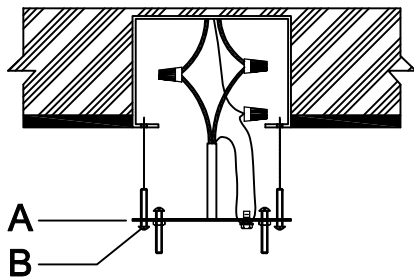

Step 1:Unpack all parts from cartons carefully.
Fix the Mounting Plate(A) to the junction box with
Mounting screw(B).

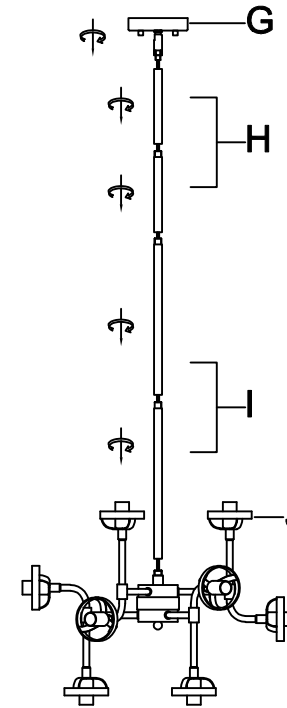

Step 2:Screw the long stem(I) and Short Stem (H) to the
Lamp Body (J).Make sure to feed the branchwires
of the fixture through the stems during assembly.
Remove or add stems to adjust the height. Then screw the
canopy (G) to the stem.

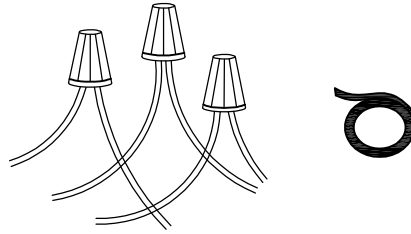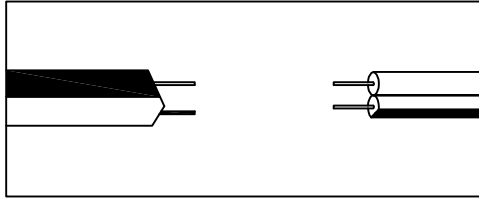


Step 3: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:


Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

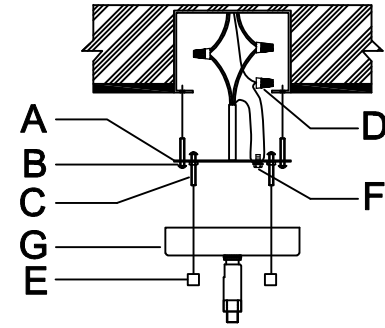

Step 4: Install the Mounting Plate (A) to the junction box with Mounting Screw (B). Attach the Canopy (G) to the Mounting Plate (A), and fix it by turning the Canopy Nut (E) anti clockwise.

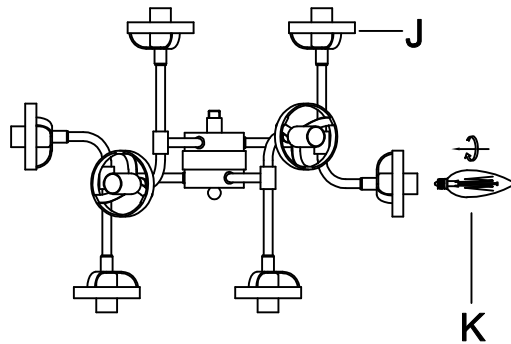

Step 5: Insert the light bulb (K) into the Sockets.

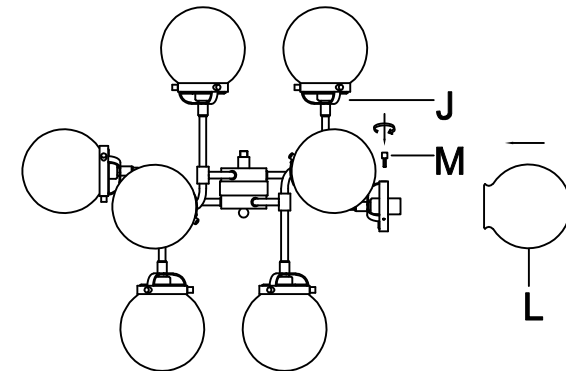

Step 6: Insert the glass shade (L) on the lamp body (J), then tighten it with the crown nut (M).