

Triton® | K-7308-5A

Shelf-back double wristblade lever handle sink faucet with loose-key stops

Features

- Valvet® valves
- Wristblade Lever handles
- Adjustable flanges
- Loose key stops
- 1/2" NPT inside-threaded inlets
- Low gooseneck spout
- Stationary spout
- 7-5/8" (194 mm) wall-to-spout outlet
- Less drain
- 2.5 gpm (9.5 lpm) maximum flow rate at 60 psi (4.14 bar)



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 3-5/8" (92 mm)

Flow Rate

Faucet Flow Rate: 2.2 gpm (8.3 l/min)

Material


- Brass
- Brass valve bodies

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner



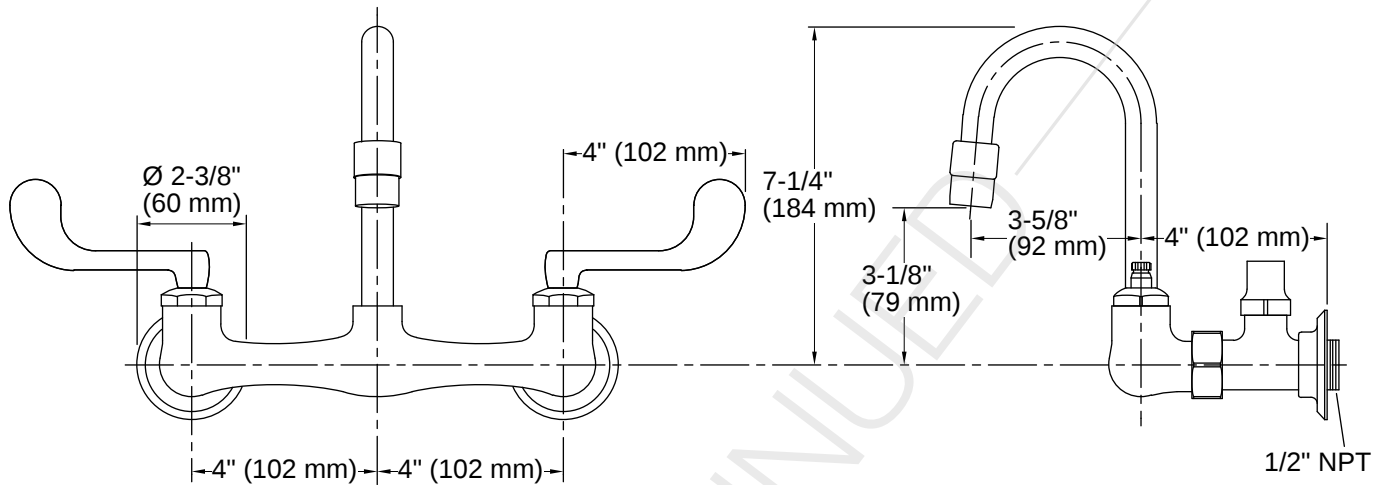

Installation

- For 8" (203 mm) centers

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

