

# ACT2055 - Water Filter Tap

Product Finish: Chrome

EAN13 barcode: 5060048383607



## Product features:

- Push the cold lever backwards for crystal clear filtered water.
- Filter cartridge life 6 months or 5600 litres
- Quarter turn handle action for precise flow control
- Metal construction throughout
- Antisplash spout supplied as standard


## Additional information / Parts included:

SCO06041

Primary WRAS fittings number (see [www.wras.co.uk](http://www.wras.co.uk)):

1909367

## Product dimensions:

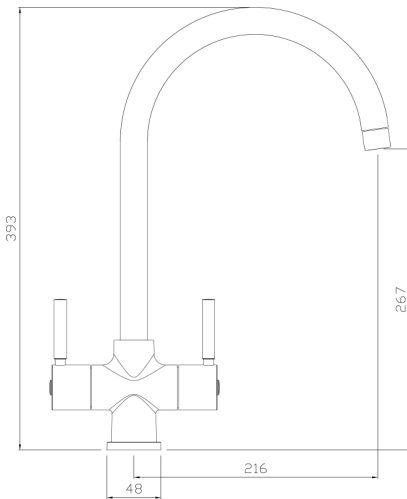


- Overall Height / projection: 393 mm
- Exit reach: 216 mm
- Exit height: 267 mm
- Centre distance(s): n/a
- Base diameter(s): 48 mm
- Recommended hole diameter: Ø35 mm
- Max. surface depth: 70 mm
- Spout diameter: 24 mm
- Spout aerator size: M22x1 F

## Packaged properties:

Box length: 435 mm  
Box width: 340 mm  
Tap only weight: 1.76 kg

Box depth: 70 mm  
Units per outer: 5  
Boxed weight: 2.15 kg

## Product flow characteristics:

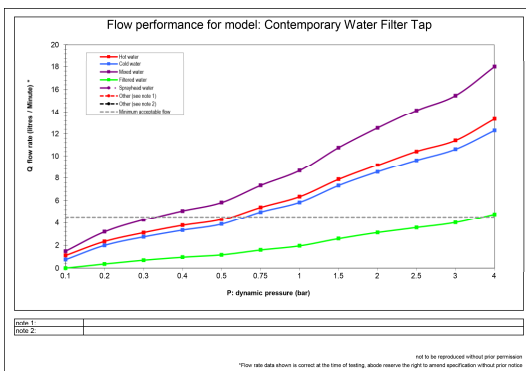

- Min / Max water pressure: 0.30 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 15.46

- Control valve type: 1 x 1/2" ceramic disc QT, 1 x ceramic disc diverter HT.
- Flow characteristics: Dual flow (H/C&F)
- Non return valve(s): None

- Aerator type: Honeycomb Aerator
- Spout connection method: Grub screw at rear of body

- Tail pipe inlet / outlet size: M12 / 1/2" BSP Female
- Inlet pipe type / length: Flexible stainless braided hose / 250 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year