



Type IC, Wet & Air-Tight

DESCRIPTION

4" Eyeball Round Recessed Gimbal LED
 With Integral Driver In Connection Box
 Unique & Patented Design:
 Gimbal Yet Air-Tight Without Housing Needed


FEATURES & BENEFITS

2" Deep - Install Where Ceiling Space Is Limited
 Type IC Rated - No Housing Required
 Fast & Easy To Install - Save On Labor
 Driver Inside Connection Box - No Junction Box Needed
 Directional Beam - Great for Sloped Ceilings and Artwork
 CRI 90+ for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
 Spring Clips. Ceiling Clearance Required: 2 1/2"

DIMENSIONS: ID 4" OD 5" Cut Out 4" to 4 1/2"

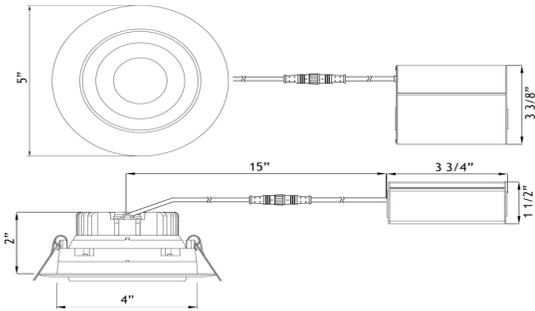

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as
 Cat # LLL-LD1025T

ORDERING GUIDE Example: **LL4G - 30K - WH**

LL4G	CCT	Trim Finish	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	41K	BN	Brushed Nickel
Dim to Warm 3000K to 2000K	32K	White Trim Only In Stock	

Lotus LED Lights USA

250 H Street # 301, Baine WA 98230 tel 360-200-5500

Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA

www.LotusLEDLights.com

LL4G

4" Eyeball Round Recessed Gimbal LED 11.4W

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION	
Applications	Sloped Ceilings, Highlighting Artwork
Energy Used	11.4 W
Color Temperature	2700 3000 4100 DTW 30-20
Light Output	960 1000 1050 800
Halogen Equivalent	50 W
Beam Angle	38° wide beam with 20° tilt and 360° rotation
CRI	90 +
Driver Input	120V AC Triac Dimmable
Power Factor	120V-347V AC 0-10V Dimmable
Dimming	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus, Energy Star (except DTW), T24
Warranty	10 Year on Residential 5 Year on Commercial Applications

AVAILABLE TRIMS



White



Black



Brushed Nickel

ACCESSORIES

Sold Separately

Low Voltage Extension Cables
 6ft - cat # **EXC6**, 20ft - cat # **EXC20**
 Max 40 ft Allowed. FT4 / CMR rated



Flat Rough-In Plates - cat # **RIP4**



Flanged Rough-In Plate - cat # **FRP4**



Goof Ring OD 5 3/4"
 White cat # **GR4** Black cat # **GR4-BK**

COMPLIANCE



**Type IC
 Air-Tight**

USA Patent # US 10,344,952 B2 | Canada Patent # 2,967,954

Lotus LED Lights CANADA

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090

Delta BC & Mississauga ON