


PRODUCT USER MANUAL

COMPONENTS LIST

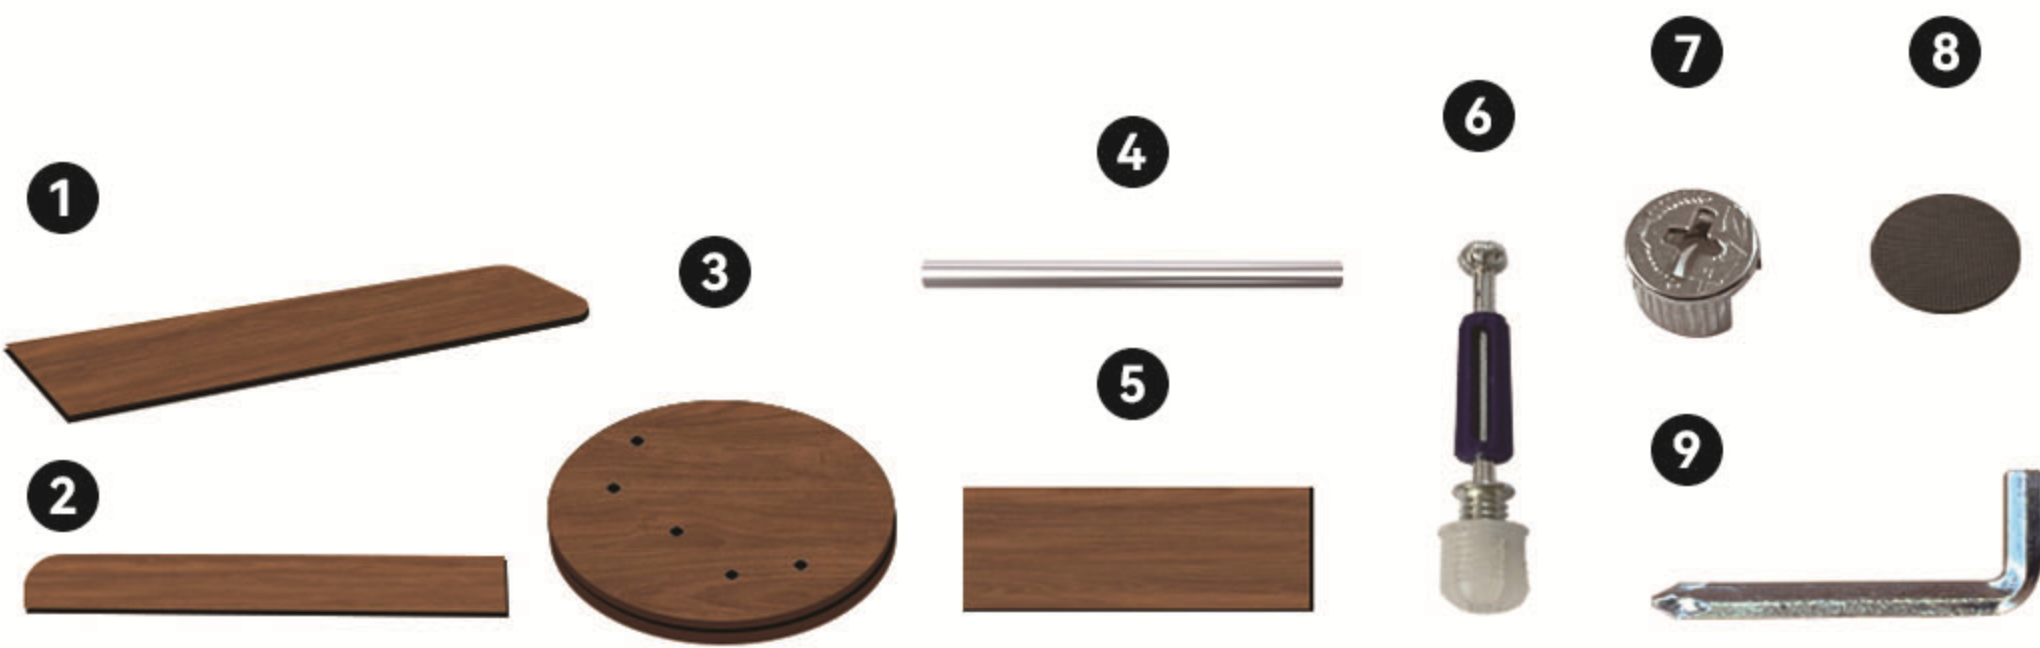


- 1 Mirror panel x 1
- 2 Side panels x 2
- 3 Base plate x 1
- 4 Stop bars x 3
- 5 Shelves x 3
- 6 Connecting rods x 25
- 7 Eccentric wheels x 25
- 8 Anti-slip pads x 4
- 9 Screwdriver x 1

HELPFUL TIPS


- 1. Installing the base:** Before installing the base, place the mirror panel flat on a level, stable surface. As mirrors are fragile, please handle them with care during both installation and disassembly.
- 2. Ensure all eccentric wheels are securely tightened to prevent loosening.**
- 3. Do not place the product in excessively humid or overly dry environments, as this may lead to mold growth or material cracking.**
- 4. This product features eco-friendly, paint-free boards. Some yellowing may occur over time. To clean, gently wipe the surface with a cloth dampened with a small amount of toothpaste. Avoid applying excessive pressure.**
- 5. Keep the mirror surface away from hard or sharp objects to prevent scratches or structural damage.**
- 6. Avoid hanging heavy items on the coat hooks for extended periods, as this may cause deformation of the structure.**

INSTALLATION STEPS

Step 1: Remove the plastic caps from the connecting rods. Then, insert the rods into the base (5 mounting holes), mirror panels (8 mounting holes), and both side panels (12 mounting holes).
(For easier base installation, lay the mirror panel flat on an elevated, stable surface.)

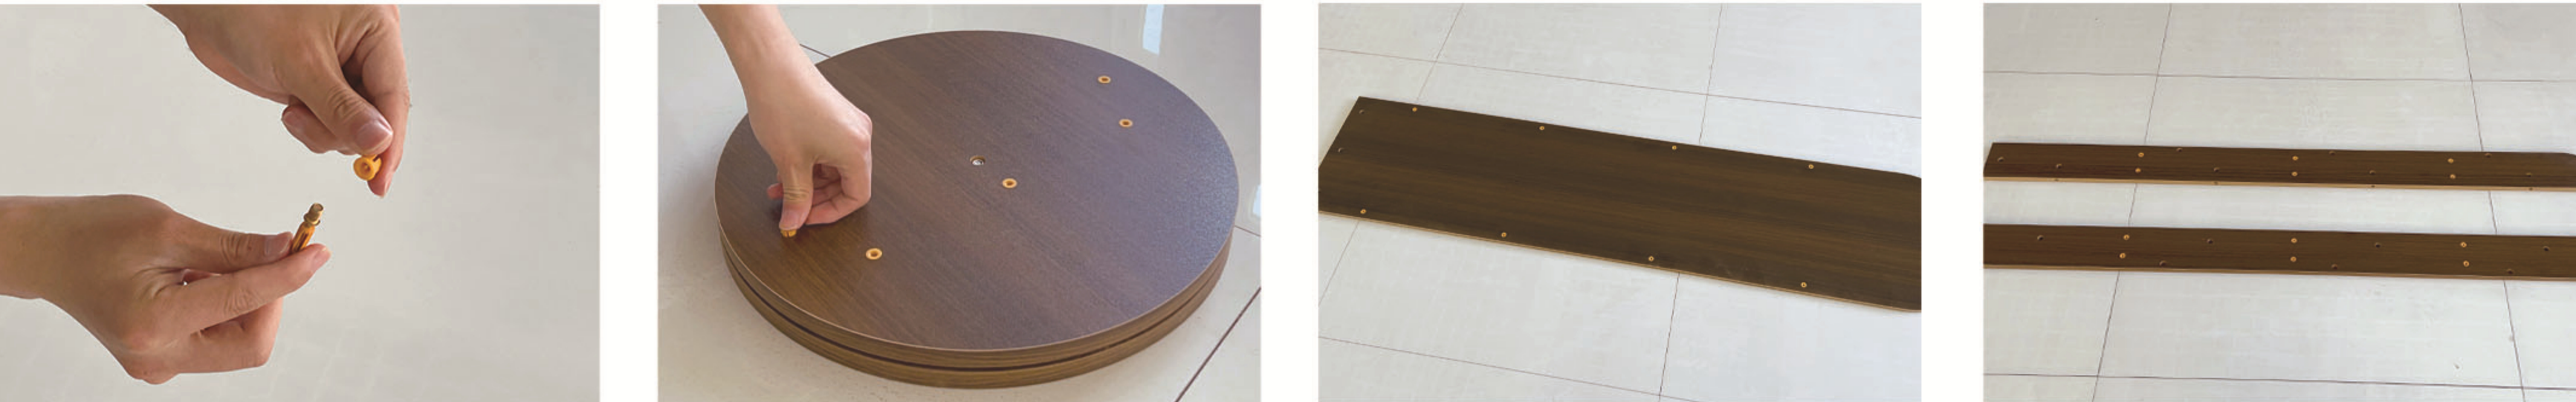

Step 2: Screw all the connecting rods tightly into the panels (make sure they are screwed in completely). Then align the shelf holes downward with the connecting rods on the side panel and insert them. Insert the eccentric wheels and tighten them with a screwdriver.

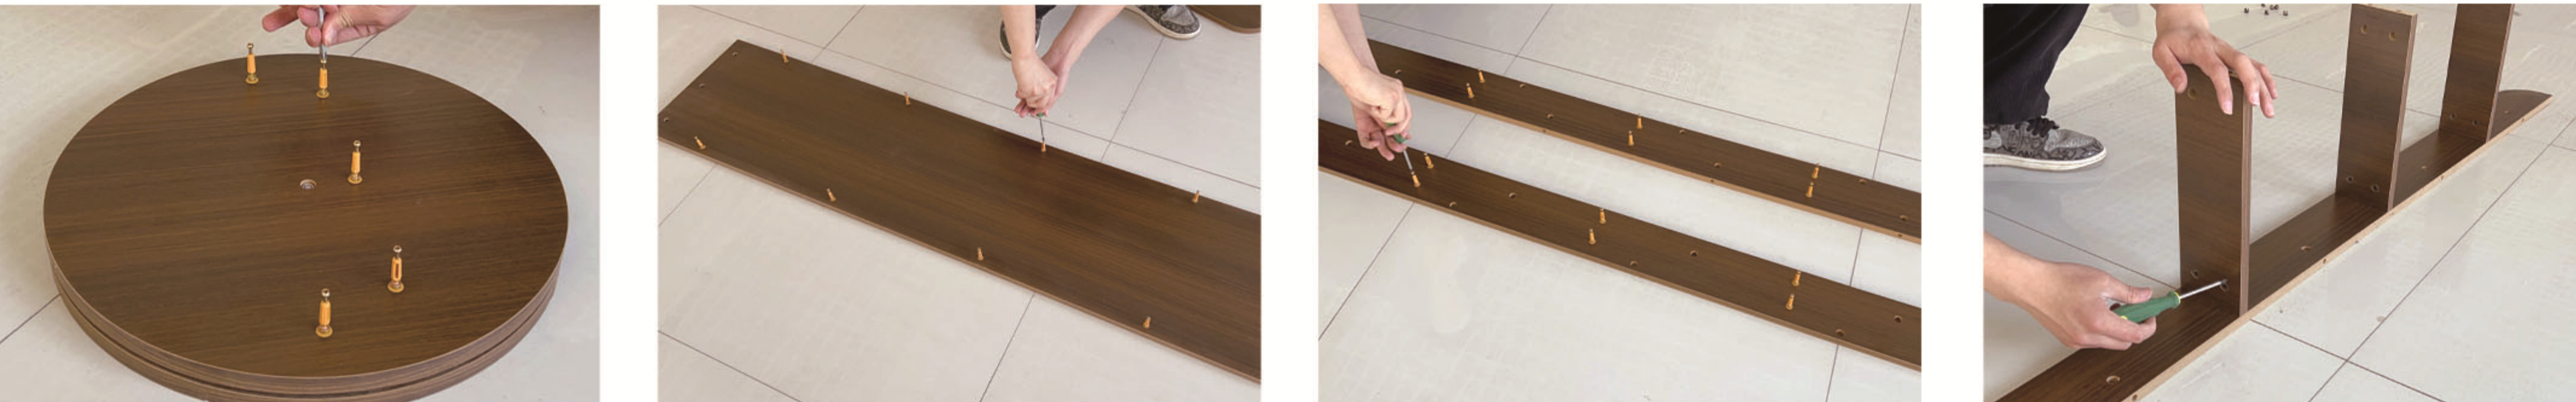

Step 3: Insert the three stop bars into their respective holes in sequence. Then, align the other side panel with the holes and fit it into place (ensuring the curved edge of the side panel is on the same side as the previous one). Tighten all the eccentric wheels. Align the assembled stand with the holes in the mirror panels and fit it into place.



Step 4: Gradually fit the eccentric wheels into all the holes and tighten them securely. Then align the base with the mounting holes, fit it into place, and install the eccentric wheels by tightening them securely. The full-length floor mirror is now complete.

