


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

6-LIGHT CHANDELIER

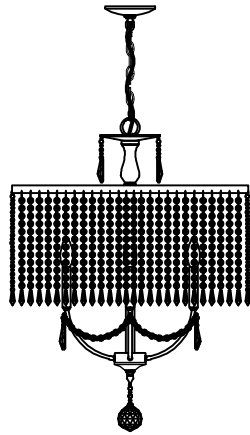

TOOLS REQUIRED

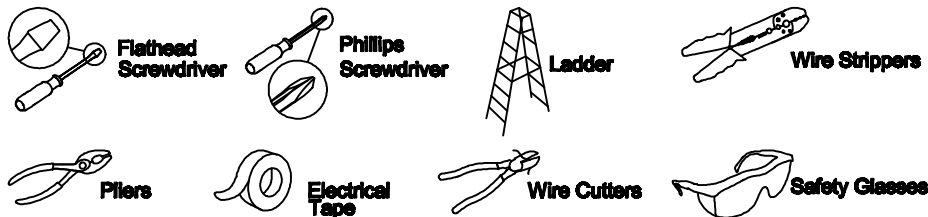

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY	PIECE	DESCRIPTION	QUANTITY
A	Mounting bracket	1	J	Frame	1
B	Green ground screw	1	K	Central tube	1
C	Outlet box screw	2	L	Fixture body	1
D	Wire nut	3	M	Crystal	5
E	Canopy	1	N	Crystal	6
F	Collar loop	1	O	Crystal	84
G	Canopy ring	1	P	Crystal	1
H	Chain	1	Q	Crystal	6
I	Fixture loop	1			

INSTALLATION

1. First adjust the angle of the arm on the fixture body(L) by hand, then attach the central tube(K) to the fixture body(L), and finally attach the fixture loop(I) through the frame (J) to the central tube (K).
2. Attach the mounting bracket(A) to the junction box with outlet box screw (C).
3. Attach the collar loop(F) to the mounting bracket(A).
4. Attach chain(H) through the canopy ring (G) and canopy (E) in turn, attach the end of the chain(H) to fixture loop(I) and attach the other end of the chain (H) to canopy loop (F) with chain Link (H1).
5. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire, black to (smooth) and white to (ribbed).
6. Attach the canopy(E) through the collar loop(F) to the mounting bracket(A) with canopy ring(G).
7. Install the 60W MAX type B10 bulbs (not included) into each socket.
8. Circularly hook crystal(M) to the fixture loop(I), hook the crystal(N) to the arm on the fixture body(L), hook the crystal(O) to the frame(J), hook the crystal(P) to the hole at the bottom of the fixture body(L), finally hook the crystal(Q) to the 2 adjacent arms on the fixture body(L).

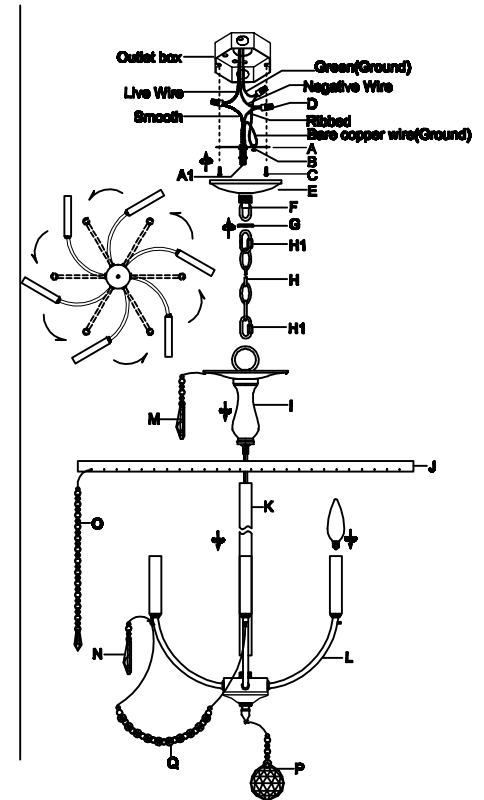

If you have any questions, please contact us, our warmest customer service will assist you within 24 hours.