


♦ Inspect the wire insulation for any cuts abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker of by removing the fuse at the fuse box.

TOOLS REQUIRED




HARDWARE INCLUDED



*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

EXPLODED PARTS

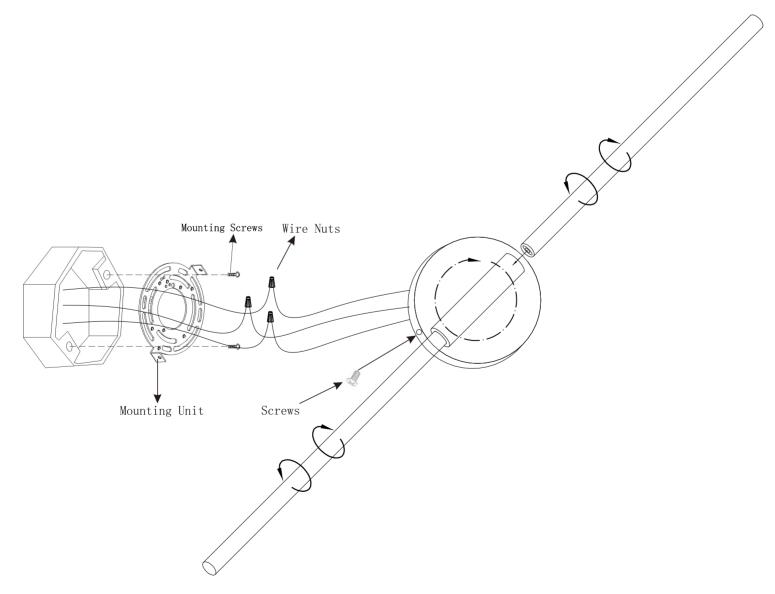

STEP 1

Unscrew the Screws 1 from the mounting unit. Use the mounting screws to attach the mounting unit to the junction box.

