


SHOWER CORNER CADDY TENSION POLE



This is the original instruction, please read all manual instructions carefully before operating. We reserve a clear interpretation of the user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on the product.



Warning-To reduce the risk of injury, the user must read the instructions manual carefully.

WARNING






- The product is fixed in front of the ground and ceiling by the built-in spring structure. Before use, confirm that the installation position is a hard ceiling. For non-hard ceilings (such as aluminum buckle ceilings), the product may not be able to be installed and used properly.
- Fan shaped and square trays (excluding soap holders), the weight of items placed on a single tray must not exceed 5.4kg.

PRODUCTION CONFIGURATION


Height range (in)	39-125		
Single tray load-bearing capacity (kg)	5.4		
Tray	3 layers, fan-shaped		
Colour	Black	Bronze	Silvery

PARTS LIST

 A=5x L=490mm	 B=1x L=291mm	 C=1x L=480mm	 D=1x	 E=3x
------------------	------------------	------------------	----------	----------

 <p>F=1x</p>	 <p>G=1x</p>	 <p>H=1x</p>	 <p>I=1x</p>	 <p>J=4x</p>
---	---	---	---	---

INSTALLATION INSTRUCTIONS

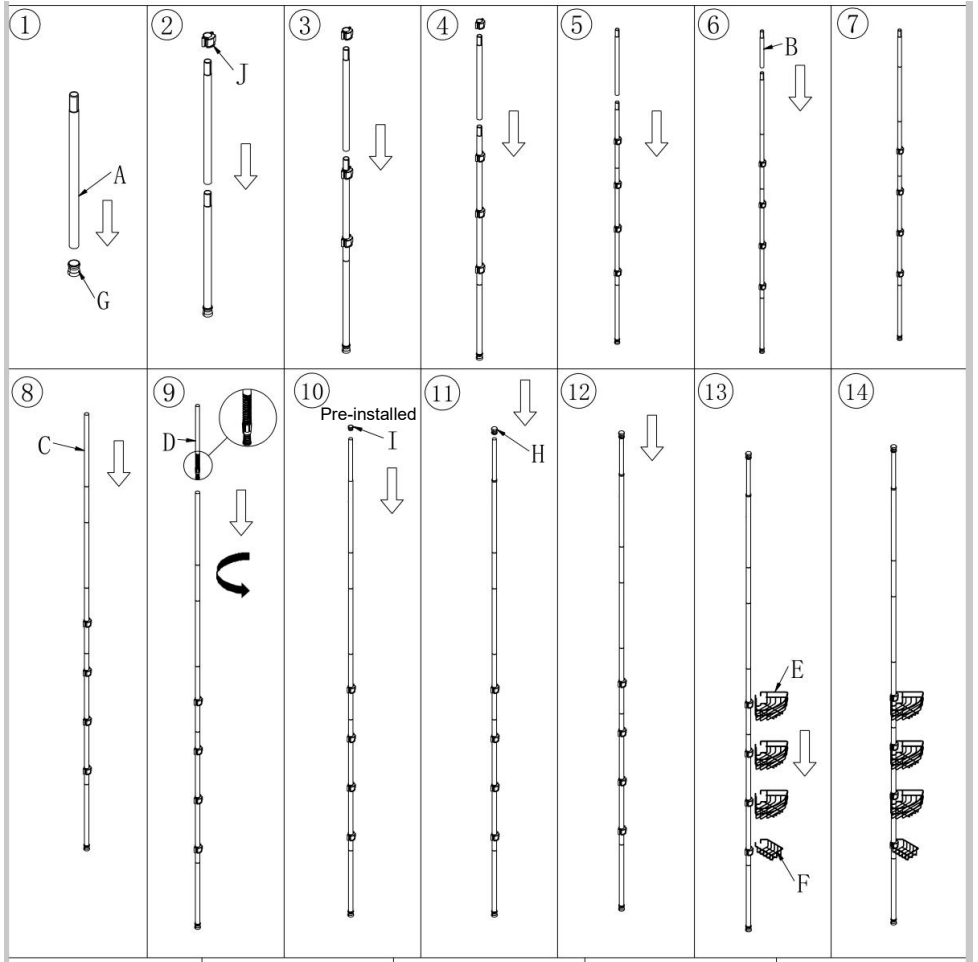


Height adjustment instructions


1. Coarse adjustment: The user confirms the installation position, the distance between the ceiling and the ground, and adapts by increasing or decreasing the number A/B pole.

2. By adjusting the length of the D rod inserted into the C rod, ensure that the spring compression is approximately 50-80mm.

Rotate the D-rod in the direction shown in the diagram to loosen it, adjust it to the appropriate length, and then rotate it in the opposite direction to tighten the D-rod.

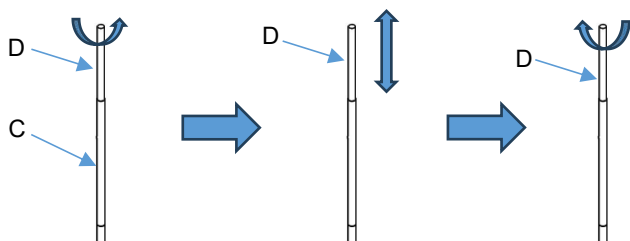

Overall installation

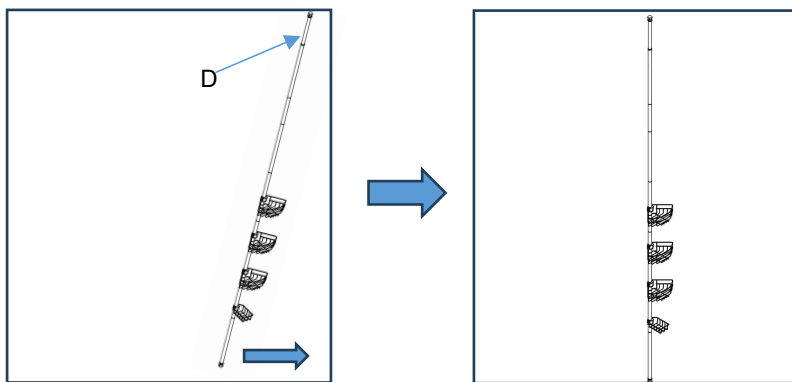

Complete installation