Assembly Instructions

PARTS LIST

- Please read the instruction manual carefully before using it.
- Please assemble strictly in accordance with the instruction.
- Please double check to the ensure that all parts of the package contents intact.
- Please install 50% of the screws first, wait until all the screws have been installed, and then install them all to 100%.

A  Back*2pcs	B  Seat*2pcs	C  Right-hand arm*2pcs	D Left-hand arm*2pcs	E  Closing screw*4pcs	F1  M6x40mm Sleeve screw*8pcs
F2  M6x30mm Sleeve screw*8pcs	F3  M6x16mm Flat head screw*16pcs	G  Big washer*4pcs	H  Small washer*24pcs	I  Nut*4pcs	J  Cover*4pcs
K Leg of back*4	L Leg of amrest*4	M  Hex key*2	N  Wrench*1pcs	O  Spare feet screw*4	

step1

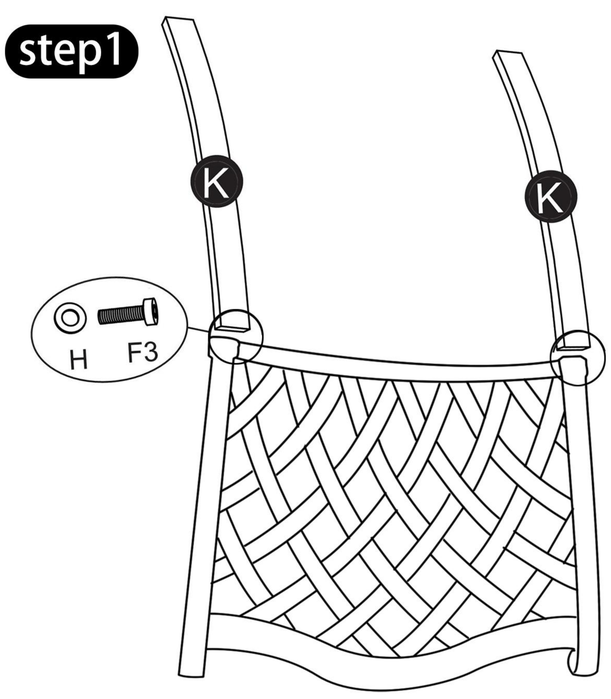

Please connect backrest (A) and Leg of back (K) together using F3+H and tighten the screws by 50%

⚠ don't tight all screws until assembly is finished.

step2

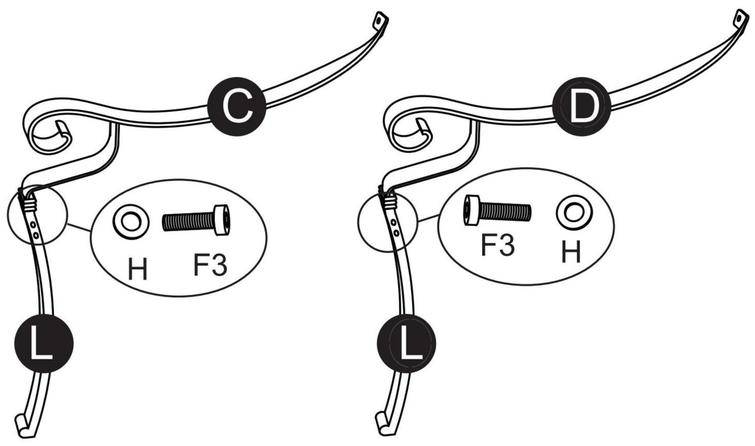

Please connect the right-hand arm (C) and leg of the armrest (L) together using (F3+H) and tighten the screws by 50%. The left-hand arm (D) is the same.

⚠ don't tight all screws until assembly is finished.

step3

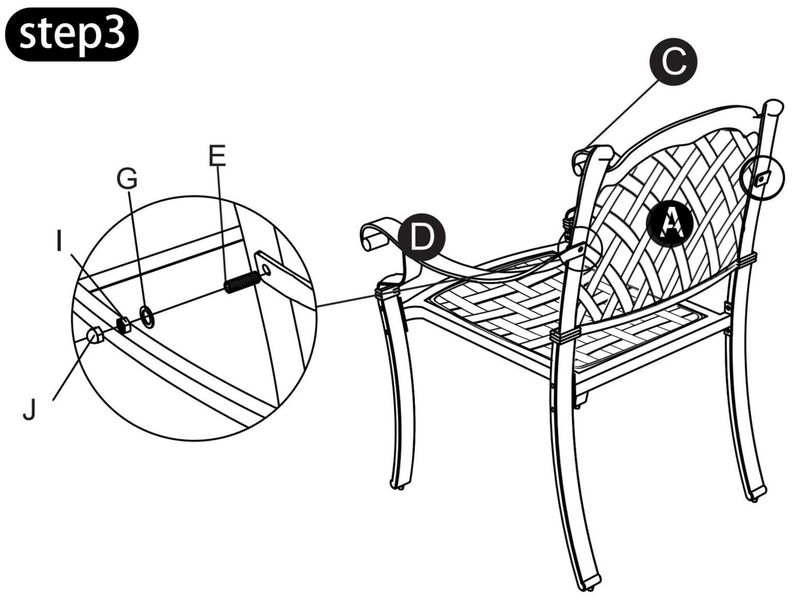

Please connect the Back (A) to the Left-hand arm (D) using Closing screw (E), Big washer (G), and Nut (I), and tighten the screws by 50%. T, cover with the （J）.The right-hand arm (C) is the same

⚠ don't tight all screws until assembly is finished.

step4

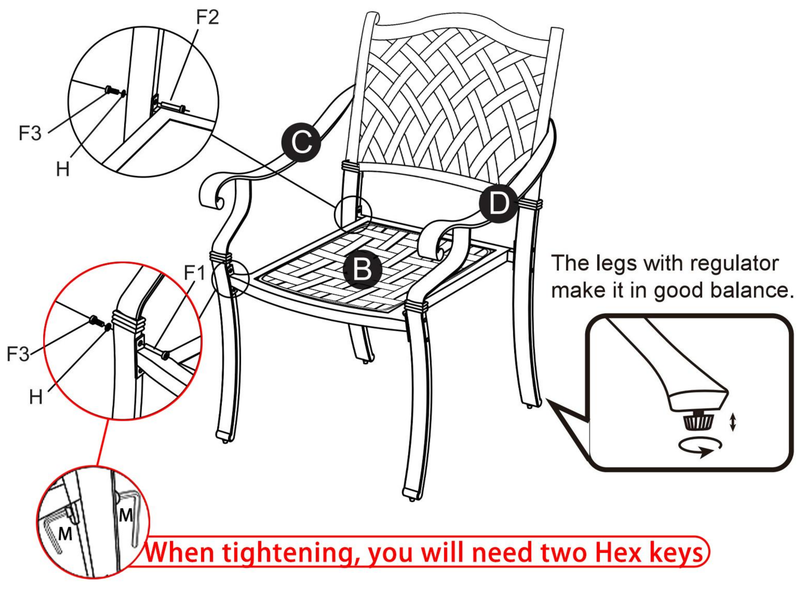

Please connect the back and seat. Pay attention to the front and back of the seat. Connect the Leg of back (K) and the seat (B) using F3+H and F1. Connect the Leg of amres (L) and the seat (B) using F3+H and F2, and you can now tighten them all to 100%.

step5

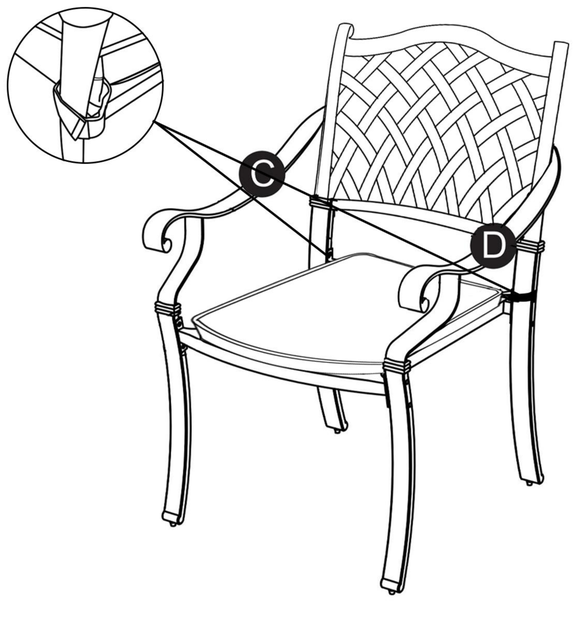

Please place the cushion on the seat with the two velcro straps facing inwards on the cushion to secure the cushion.

Please feel free to contact us with any questions by referring to the attached document and sending photos or videos.