

Label	Picture	Description	QTY (PCS)
A		Backrest	1
В		Left Armrest	1
С		Right Armrest	1
D	· · · · · · · · · · · · · · · · · · ·	Left Front Rail	1
E		Right Front Rail	1
F		Left Rail	1
G		Right Rail	1
Н	(<u>· </u>	Short Wooden Batten	1
I		Long Wooden Batten	1

J	(Middle Leg Connecting Wooden Batten	2
к	,	Back Middle Leg Connecting Wooden Batten	1
L		Bed Slat	1
М		Seat Cushion Package	1
M1		Left Seat Cushion	1
M2		Right Seat Cushion	1
N		Back Cushion	2
0		Pillow	2
Р		Middle Leg	1

Q		Back Middle Leg	1			
R	0	Leg	7			
<u>Hardware</u>						
1		Plastic Washer	11			
2		Allen Wrench	1			
3		Bolt (M8*50)	5			
4		Bolt (M8*40)	8			
5		Bolt (M8*20)	17			
6		Screw (M4*30)	29			
7	Ø	Flat Washer	30			
8	Q	Spring Washer	30			
9		Iron Connecting Plate	1			
10		Iron Connecting Plate	2			
NOTICE:						


-Please read the instruction from cover to cover in detail. Thanks.


-Installed by at least two adults

-To avoid damaging your furniture , Please don't assemble on flooring or carpet.


-Please assemble on a clean non-marring surface, example for packing foam.


-Saving all packaging until have finished.

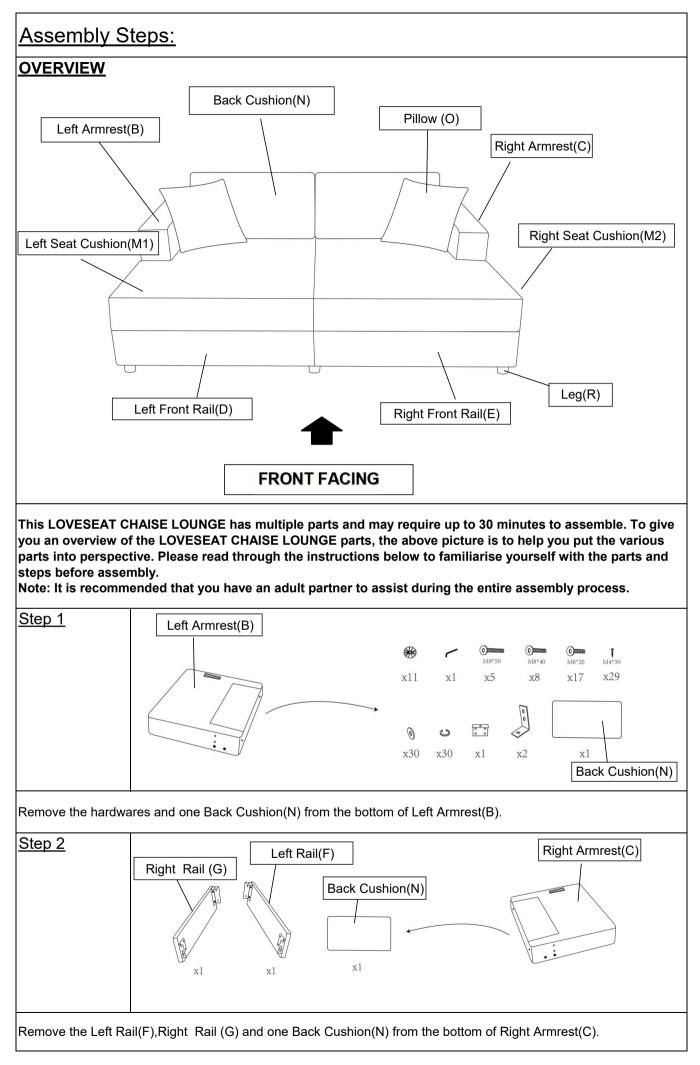

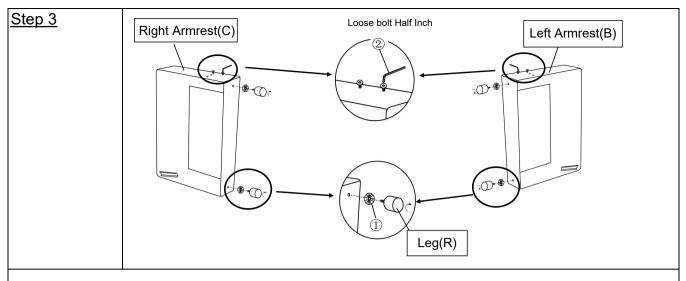


Step3.1.Install the Leg(R) at the bottom of Left Armrest (B) and Right Armrest(C) by placing Plastic Washer(①) on the threaded stem.Tighten by turning the Leg clockwise. Step3.2.Loose the bolts Half Inch by Allen Wrench(②).

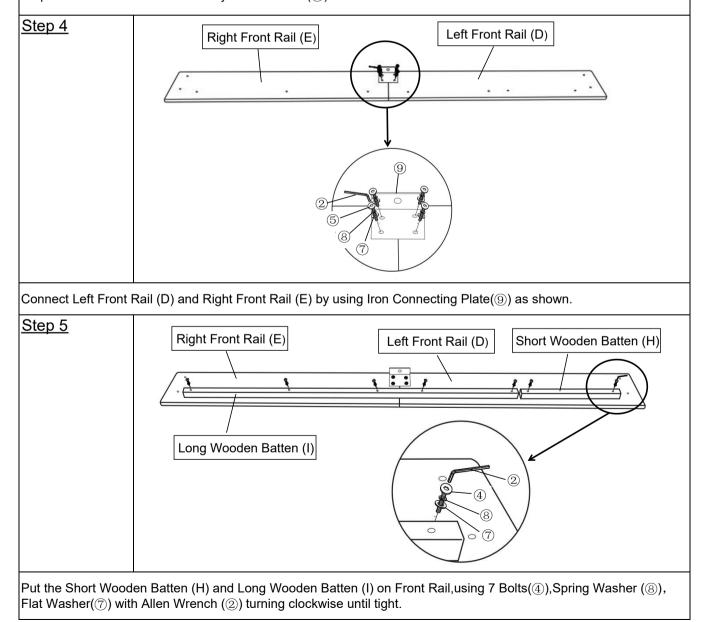


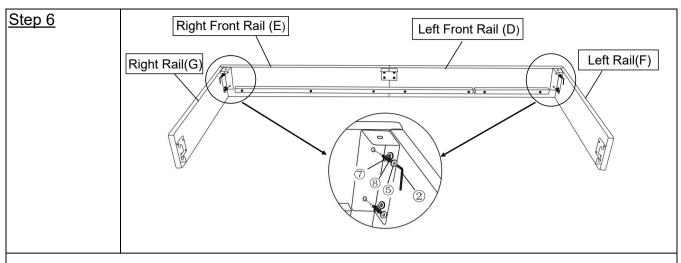



Attach the Left Rail(F) to the Left Front Rail(D),using Bolt(⑤), Spring Washer(⑧),Flat Wsher(⑦) with Allen Wrench(②) turning clockwise until tight. Repeat the same step with Right Rail(G).Tighten the Bolts fully in a sequential manner.

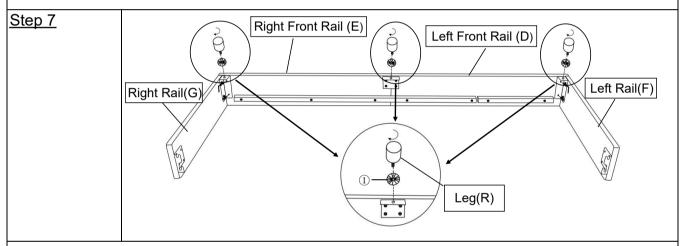

Install the Leg(R) on Left Front Rail (D) and Right Front Rail (E) by placing Plastic Washer(①) on the threaded stem.Tighten by turning the Leg clockwise.

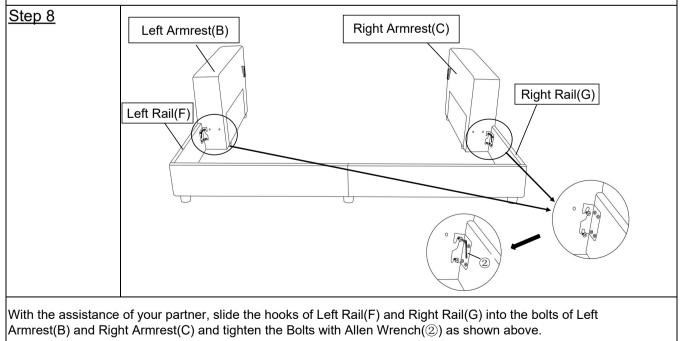

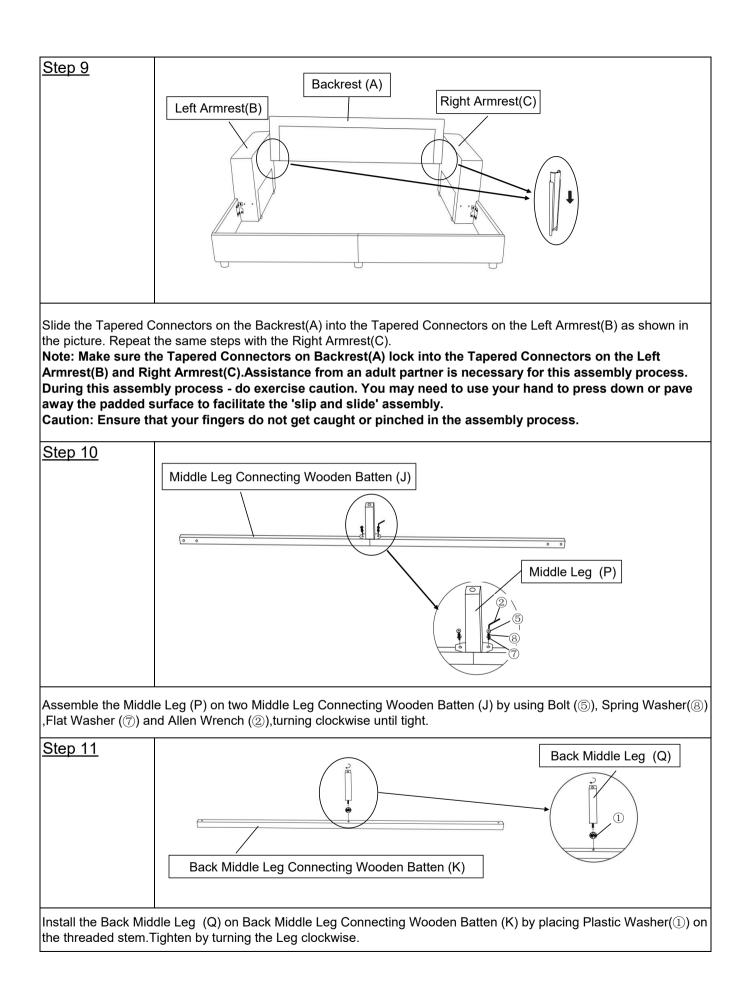

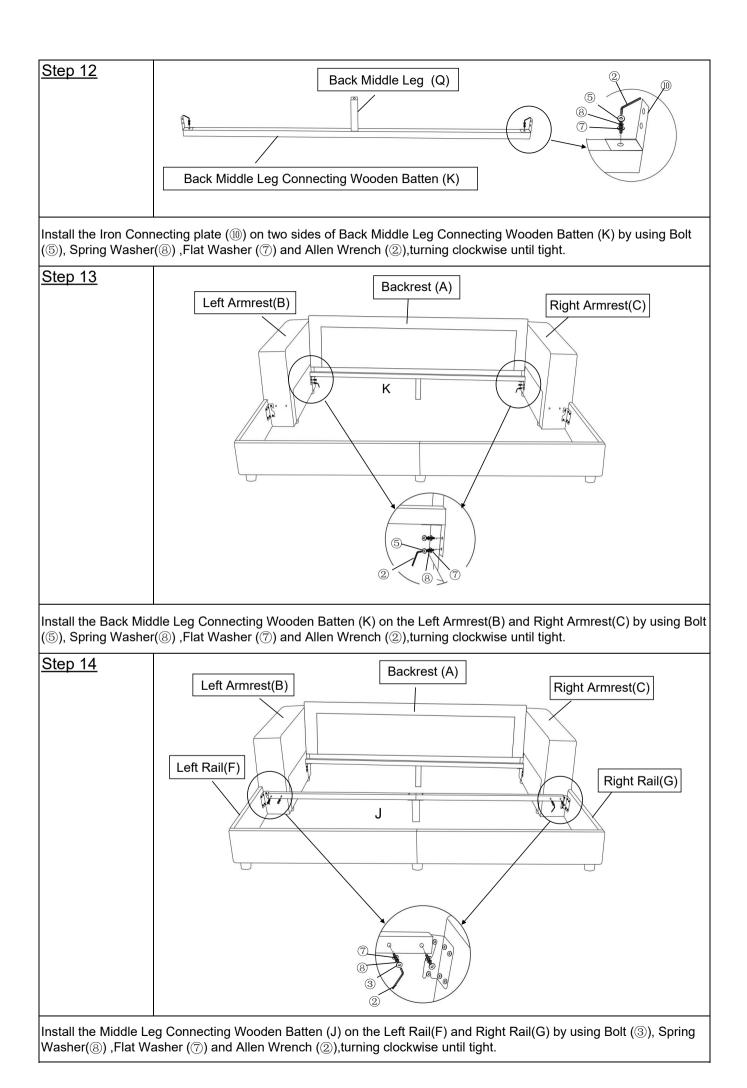

PAGE 9 OF 12

