

Assembly & Installation Instructions





Product type	Flush Mount Lighting
Voltage	110-120 Volt
Maximum Wattage	40 Watt
Bulb Base	E26/Medium (Standard)
Lamp material	Metal+Glass

Caution: It is highly recommended to get an electrician to install this light. Please make sure to turn the electricity off at the main circuit breaker before beginning installation. All glass is fragile. Use care when handling glass component(s) and/or lamp(s).

WIRE CONNECTION DIAGRAM: Wires meeting safety standards are required to connect the electrical circuit. Please read all instruction carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is completed.

Code	Description	QTY
A	Mounting screw	2
B	Mounting plate	1
C	Machine screw	4
D	Ground screw(Spare parts)	1
E	Wire connector	3
F	Canopy	1
H	Screwed ball	2
I	Lampshade	1
J	Lamp socket	1
O	Socket ring	1
K	Light bulb	0
P	Expansion screw(Spare parts)	2
Q	Washers(Spare parts)	4
R	Outlet box	0

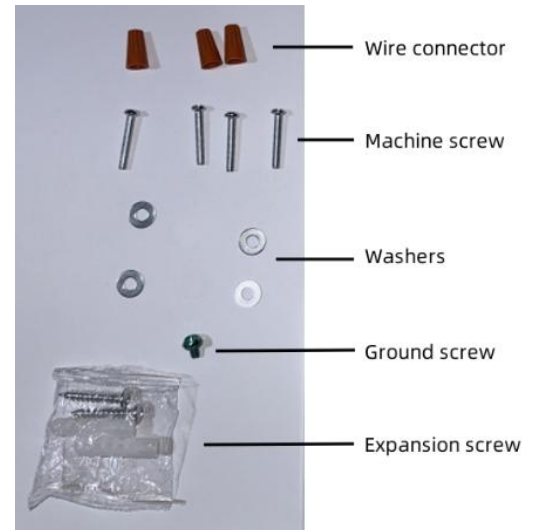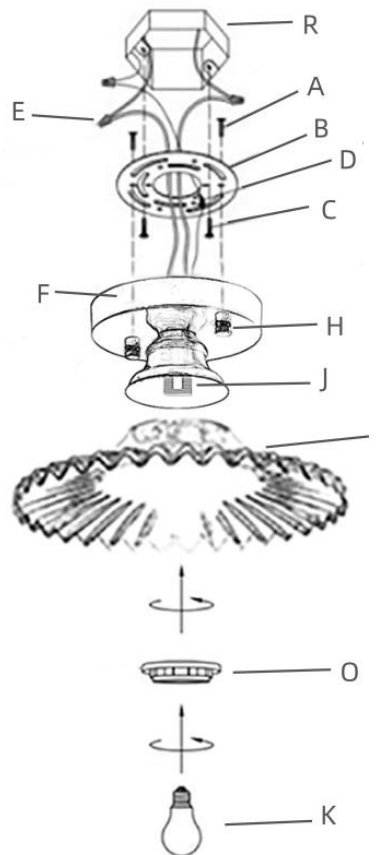

Installation Steps

Turn off the power at fuse or circuit box

1. The mounting screws (A) are already in the matching holes in the mounting plate (B), then fix the mounting plate(B) to the outlet box(R) (not included) with machine screw(C).



2. Make wire connections, with wire connectors(E), following the reference chart listed below.

Connect, Live wire, Black or Red Outlet Supply Wire to:	Connect, Neutral wire, White Outlet Supply Wire to:
Black	White

*Note: When parallel wire (SPT I & SPT II) is used. The Neutral wire is square shaped and ridged and the Live wire will be round in shape and smooth. (See Illustration above.)

Grounding Instructions: This fixture is supplied with a ground wire (a copper wire fixed to the Canopy (F), so there is no need to use a Ground screw D), connect to outlet ground wire with a wire connector.

3. Orient the ceiling canopy of body(F) so that the mounting screws(A) protruding from the mounting plate(B) go into the holes in the canopy of body(F),then secure it with the provided screwed balls(H).

4. Remove the Socket ring(O) from the Lamp socket(J). Have the opening of Lampshade (I) go over the Lamp socket(J)m carefully adjust the Lampshade (I)placement and have it sit centered on top of Lamp socket(J). Then thread down the Socket ring (O) and tighten together both Lamp socket(J) and Lampshade (I).

5. Install Light bulb(K)(not included). Be sure to use light bulb(s) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.