

ASSEMBLY INSTRUCTIONS

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.


1. JOIN THE MALE AND FEMALE CONNECTORS (1) AND SCREW SOCKET PART (2) INTO POLE (3).

2. INSERT POLE (3) INTO BASE COVER (4) AND BALANCE WEIGHT (5) AND TIGHTEN THEM WITH THE WASHER AND NUT USING A SPANNER.

3. USING THE MINI SPANNER (6) TO LOOSEN THE SET SCREWS, ADJUST THE ARC POLES TO DESIRED LOCATION AND TIGHTEN THE SET SCREWS AGAIN.

4. INSERT PLUG INTO AN OUTLET (7) AND TURN ON THE LIGHT.

5. ADJUST THE SHADES TO DESIRED LOCATION (8) .

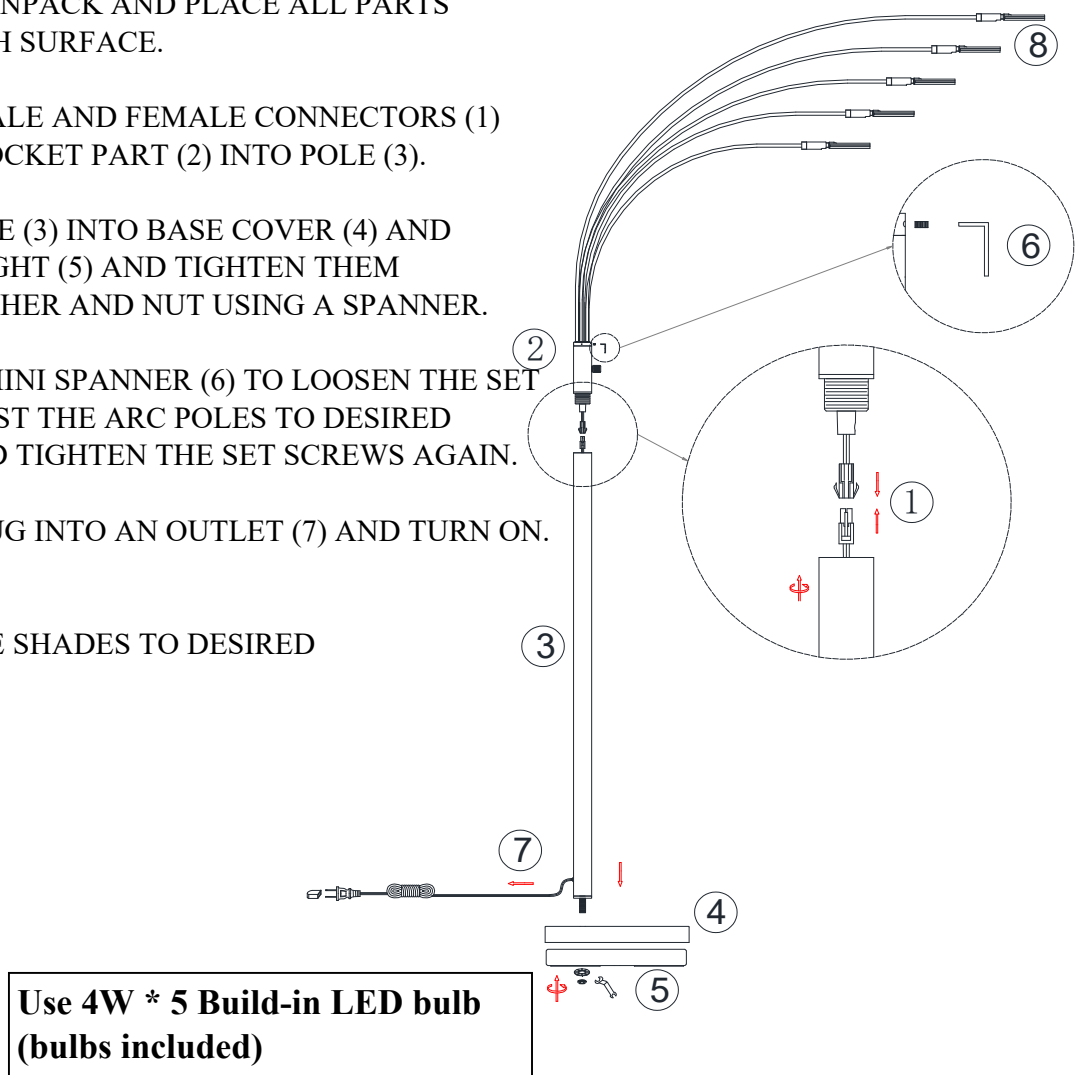

*** THIS LED LIGHT PROVIDES LOW MAINTENANCE SERVICE WITH NO BULBS TO CHANGE.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.