



Revival® | K-16210-4A

Bath faucet with diverter spout, traditional lever handles and handshower

Features

- Traditional lever handles allows for both volume and temperature control
- 15 gpm (56.8 l/min) @ 45 psi
- 9-5/8" (244 mm) diverter spout
- Traditional handshower with 60" (1524 mm) hose
- 1/2" (12.7 mm) quarter-turn washerless ceramic disc valves
- Height base: 1-13/16" (46 mm) base to outlet



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 18:58 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Flow Rate

Faucet Flow Rate: 15 gpm (56.8 l/min)

Handshower Rated Maximum Flow: 1.75 gpm (6.6 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner


Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 18:58 - US-CA

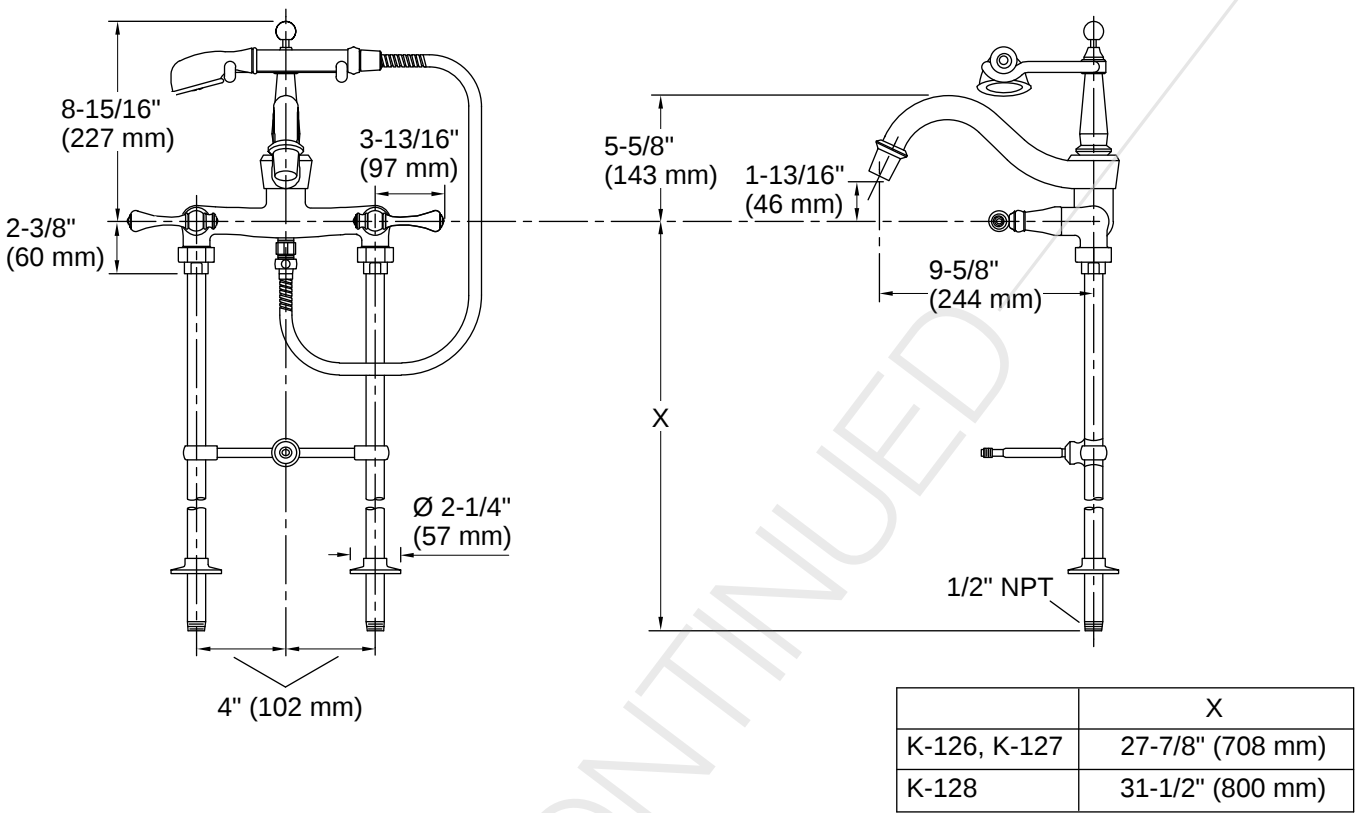

Installation

- Floor or wall-mount installation

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.3 gal/min (4.9 l/min) or less.

