ASSEMBLY INSTRUCTIONS

NOTE: Only the technical personnel can be allow to fix and maintain.

IMPORTANT!

Take all lamp parts out of the package and lay them on a flat surface.

FIXING INSTRUCTIONS

FLOOR LAMP

- 1. Place the base (A) on the flat surface ,thread the metal tube (B) onto base (A) until secure
- 2. Thread the metal tube (C) into the metal tube (B),and thread the tube(D) into the metal (C), thread the socket assembly(E) into metal tube (D) until secure.
- 3. Insert harp (F) into the saddle.
- 4. Unscrew pre-assembled finial (H) from harp(F) and then place shade(G) onto harp (F). Turn finial(H) onto harp (F) to secure shade.
- 5. Use only with maximum of 3-way 150 Watt incandescent bulb (I) (not included).

TABLE LAMP

- 1. Place the sochet assembly (A) on the flat surface, insert harp (B) into the saddle. place shade(C) onto the socket. Turn finial(D) onto harp (B) to secure shade
- 2. Use only with maximum of 60 Watt incandescent bulb (L) (not included).

REPLACEMENT BULB

Do not exceed the maximun wattage.


Light bulbs recommended.

CLEANING CARE


Clean with a soft dry cloth.

SAFETY INFORMATION

Do not touch the bulb with bare hands. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

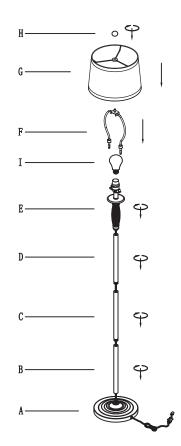

- A. Base
- B. Metal tube
- C. Metal tube
- D. Metal tube
- E. Socket assembly
- F. Harp
- G. Shade
- H. Finial
- I. Bulb (not included)



- A. Socket assembly
- E. Bulb (not included)
- B. Harp
- C.Shade
- D.Finial