





! WARNING:

- Read and understand all instructions. Failure to follow the instructions listed below may result in product damage.
- Before assembly, check all components in the package. Make sure you have all the hardware for the operation.
- Please keep your personal property away during the installation to avoid any damage.

Each package contains TWO chairs. The following display shows the components of ONE chair:




1 REMOVE THE CAP ON THE GAS LIFT MECHANISM(C) BEFORE ASSEMBLY.

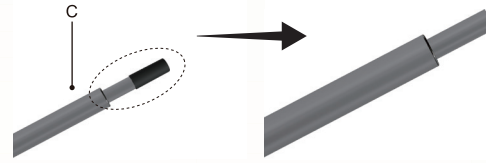


2 INSERT GAS LIFT MECHANISM(C) INTO BASE PLATE(D).



3 ENSURE THE "FRONT" SIGN IS ON SAME SIDE AS THE FOOTREST.

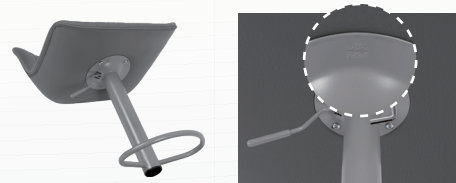

4 ATTACH SEAT PLATE(B) WITH SEAT CUSHION(A). TIGHTEN ALL BOLTS(F) WITH WRENCH(E).



5 ATTACH STOOL TOP PARTS WITH BASE PARTS.




MAINTENANCE INSTRUCTION

Clean with dry cloth. Wipe with neutral detergent.
DO NOT USE the product when it is unsafe for sitting.

ADJUST INSTRUCTIONS:

To press down,
sit on and pull upwards the handle

To lift up,
move off from the seat and pull upwards the handle

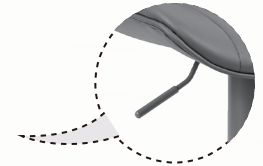

DISASSEMBLY INSTRUCTIONS:

- Remove the attached bolts underneath the seat cushion.
- Turn base plate(D) upside down.
- To disengage the locked gas lift mechanism(C), use a hammer to hit the pipe end in the bell mouth.
- Lift the seat upward, pull the support pole(B&C) off the base plate(D).
- To remove the footrest from the gas lift mechanism(C), turn the stool upside down.
- Gently strike the junction between. Then detach two parts.

CUSTOMER SERVICE INFO

If you have any product related problems during your assembly or use,
we will provide faithful solutions for you.