


### Features

- Acrylic
- Optional K-1491 removable bath pillow
- Optional K-1601 footstop
- 66" (1676 mm) x 42" (1067 mm) x 22" (559 mm)

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124

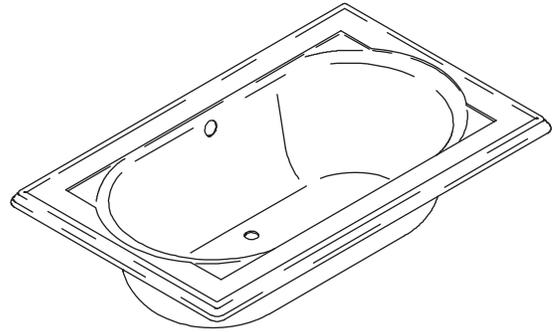

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1169	Bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>			
K-7161-AF	Pop-up drain <b>OR</b>	<input type="checkbox"/> PB	<input type="checkbox"/> CP <input type="checkbox"/> Other_____
K-7213	Cable drain with PVC tubing <b>OR</b>		<input type="checkbox"/> CP <input type="checkbox"/> Other_____
K-7214	Cable drain without PVC tubing		<input type="checkbox"/> CP <input type="checkbox"/> Other_____
<b>Optional Accessories</b>			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

### Product Specification

The acrylic bath shall be 66" (1676 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Bath shall have an optional K-1491 removable pillow, and an optional K-1601 footstop. Bath shall be Kohler Model K-1169-\_\_\_\_\_.

# MEMOIRS®

## Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (1067 mm) x 27" (686 mm)
Top area	54" (1372 mm) x 30" (762 mm)
To overflow:	
Water depth	16" (406 mm)
Capacity	81 gal (306.6 L)
Weight	80 lbs (36.3 kg)
Drop-in cut-out	64-1/2" (1638 mm) x 40-1/2" (1029 mm)
* Approximate measurements for comparison only.	

## Installation Notes


Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 40 lbs (196 kg).

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

This bath is designed for drop-in installation only. It is not suited for use in a three-wall alcove with an overhead shower.

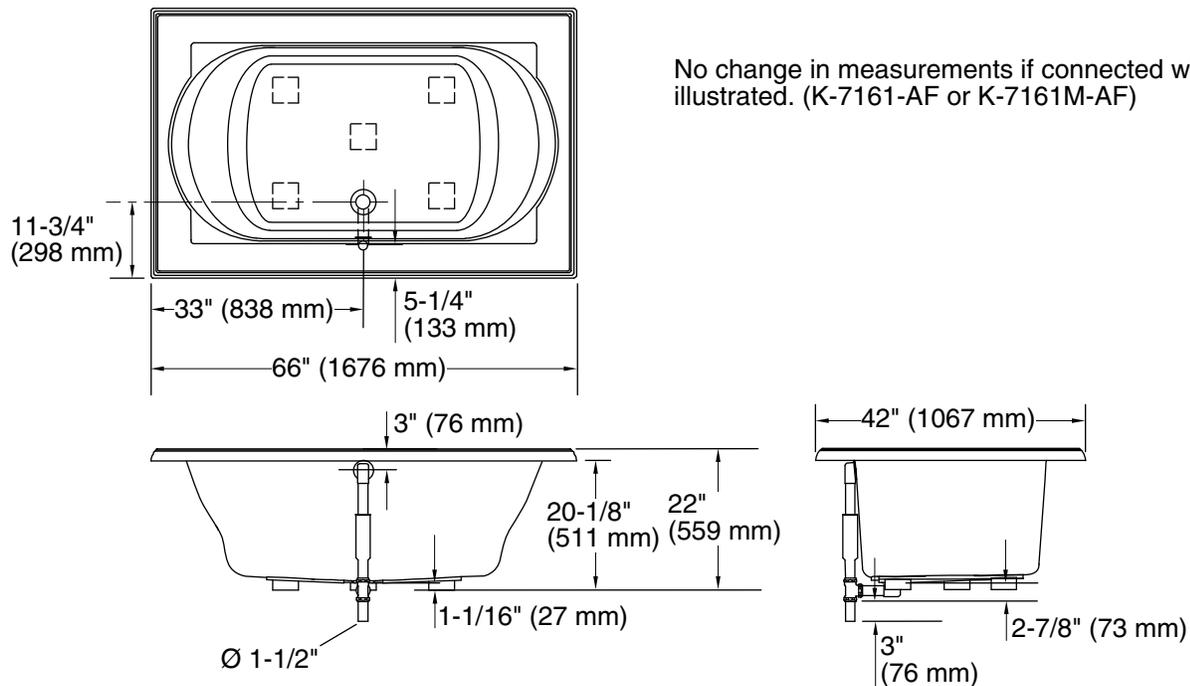

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

## Product Diagram