



Awaken® G110 | K-99242-G

30" deluxe three-function handshower kit, 1.75 gpm

Features

- Handshower features contemporary design
- Three spray functions and ADA-compliant nonpositive shutoff
- Thumb tab allows for a smooth transition between sprays
- Slidebar features adjustable mounting brackets for installation flexibility
- Includes 60" (1524 mm) smooth hose
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:04 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

IMPORTANT: Product meets the Americans with Disability Act (ADA) and ICC A117.1 (specifically section 608.5) if installed properly with an adapter that enables a non-positive shut off. Please see the KOHLER Statement® ADA handshower hose adapter in the recommended products section.



ADA

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 1.75 gpm (6.6 l/min)

Flow:

Recommended Products/Accessories


K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



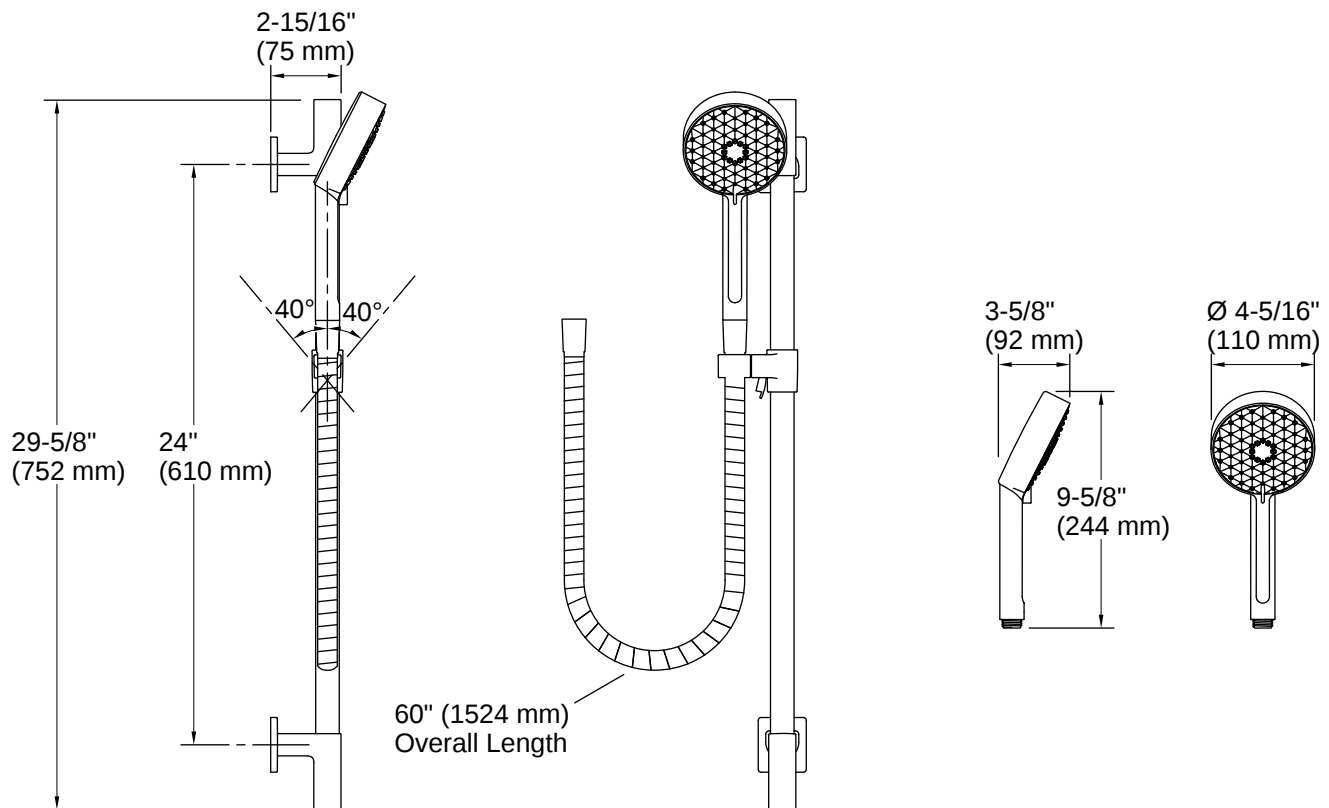

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

Mount the sidebar to stud framing or install backing support. For tile or other solid finish surfaces: Predrill mounting holes through surface material only; do not drill into the stud. For drywall surface: No predrill is required. ADA compliant when installed to the specific requirements of these regulations.

