


Installation Manual

1. Intall the Hanging Brcket to the Ceiling




For Concrete Ceiling, first use 8mm drilling bit to drill hole according to the length of the expansion screw, then fix the handing bracket with the expansion screw on the ceiling.

2. Choose a hanging bar

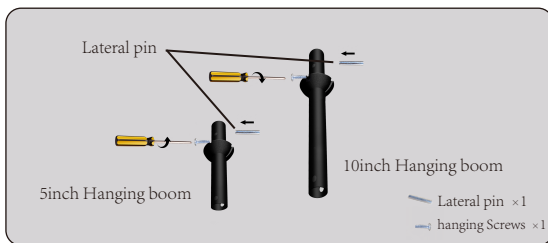


Select appropriate length of boom according to the ceiling height

3. Install the hanging bar and decoration cup

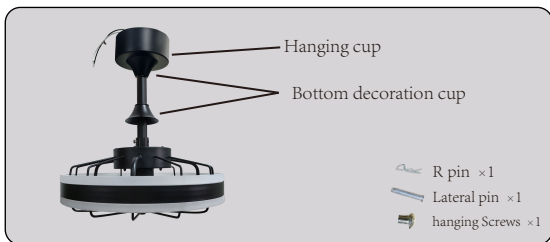

First pass the wires through the bottom decoration cup/hanging cup/hanging boom in sequence shown in Step 4.

4. Fasten the motor connection

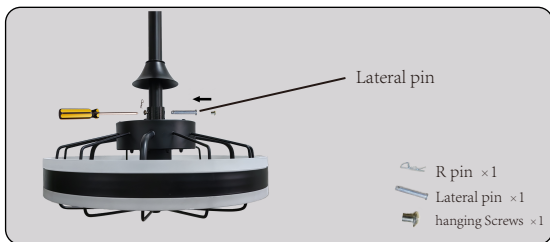

The lateral pin shall pass through the connector hole and the boom hole in turn and lock fastened with the R pin, then lock the two hanging screws, and then lower the cup to cover the connector, as shown in step 5

5. Connect the hanging ball to the hanging bracket



Place the hanging ball in the hanging bracket and turn the boom until the groove of the ball mesh with the lug of the plate. Please leave the two diagonal screws remained over half withdrew

6. Hardwired




White(neutral) supply wire to the white wire

Black (live) supply wire to the black wire

Green supply wire to the green wire

Then use the wiring cups to cover the wiring connection points

7. Fix the hanging cup

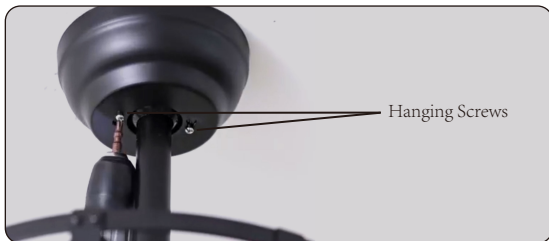

Align the cup notch with the screw on the bracket, lift the cup up and make the screws pass the cup notch, then screw in from the bottom up direction, and fix the four screws with the screwdriver, as shown in step 7.