

DESCRIPTION

Open trim with socket support in the 6" trim family for use in recessed downlighting.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Open trim with socket support for BR, R and PAR lamps. Uses socket torsion spring retention. Available in a variety of finishes.

Lamp Listings - GU24

H724ICAT	CF15/R30/GU24
H724ICATL	
H724RICAT	CF13/GU24 (spiral)
H724RICATL	


Lamp Listings - Incandescent

H7T	65W BR30, 75W PAR30, 75W PAR30L, 75W R30
H7TNB	
H7TCP	

H7ICAT	65W BR30, 75W PAR30, 75W PAR30L
H7ICT	
H7RICAT	
H7RICT	

H7ICATNB	65W BR30, 75W PAR30, 75W PAR30L
H7ICTNB	
H7UICAT	75W PAR30, 75W PAR30L, 85W BR30, 100W R30
H7UICT	

H27ICAT	50W PAR30L, 60W BR30, 75W PAR30
H27ICT	
H27RICAT	60W BR30, 75W PAR30
H27RICT	
H27RT	65W BR30, 75W R30, 75W PAR30, 75W PAR30L
H27T	

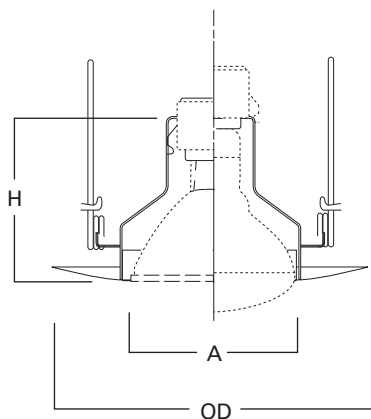

Height: 4" [102mm]
 Outside Diameter: 7-1/4" [184mm]
 Aperture: 4" [102mm]

ORDERING INFORMATION

Trim	Finish
<input type="text"/>	<input type="text"/>

300 = 6" Open trim

P = White trim
 SN = Satin nickel trim
 TBZ = Tuscan bronze trim



300P
White Trim



300SN
Satin Nickel Trim



300TBZ
Tuscan Bronze Trim

300

6-Inch Open Trim with Socket Support