

BAR CHAIR

ASSEMBLY GUIDE



Important - Please read these instructions fully before starting assembly



SAFETY AND CARE ADVICE



NO POWER TOOLS

SAFETY AND CARE ADVICE

- Check you have all the components and tools listed.
- Remove all fittings from the plastic bags and separate them into their groups.
- We do not recommend the use of power drills/drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers and Allen keys.
- Keep children and animals away from the work area, small parts could cause choking if swallowed.
- Make sure you have enough space to lay out the parts before starting.
- Assemble the item as close to its final position (in the same room) as possible.
- Do not overtighten the nuts to avoid causing damage to the threads.
- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit
- This product should not be discarded with household waste. Take to your local authority waste disposal centre

IMPORTANT INFORMATION



30 MINUTE
BUILD



ONE
PERSON



MAXIMUM
CAPACITY
120Kg

PLEASE CHECK CAREFULLY AND MAKE SURE YOU HAVE ALL
FITTINGS AND TOOLS LISTED BELOW BEFORE YOU START.

A	B	C	D	E	F	G	H
							
X02	X08	X02	X04	X10	X06	X01	X01

NOTE: The quantities above are the correct amount to complete the assembly
for 2x chairs. In some cases more fittings may be supplied than are required.

STEP 1

Use a clean, flat, soft surface to avoid any bumps or scratches.

Construct the frame.

Connect the top front bar to the side pieces using 1x washer [F] + 1x spring washer [E] + 1x bolt [A] on either side.


Secure the footrest bar using 1x bolt [C] on either side.

Slot the chair back into the frame and secure 2x washers [F] + 2x spring washers [E] + 2x bolts [B] on each side.




STEP 2

Ensure all feet touch the floor and the legs are level before tightening all the bolts. Use Allen key [H] for the footrest bar and Allen key [G] for everything else.

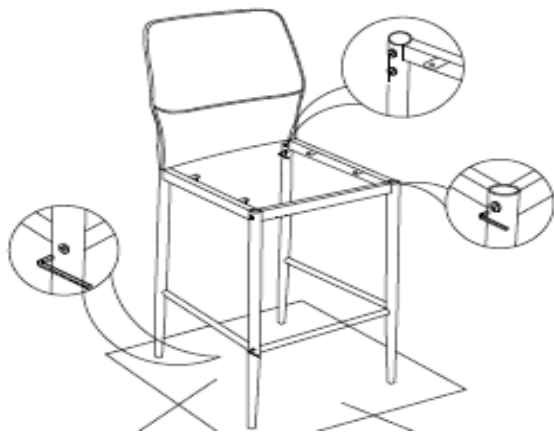

STEP 3

Attach the chair seat. Align the pre-drilled holes and secure using 1x washer [D] + 1x spring washer [E] + 1x bolt [B] for each hole (4 in total). Righten with Allen key [G].

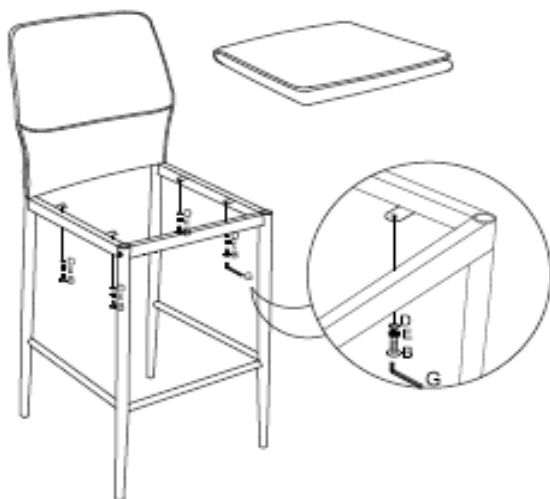

STEP 4

Check stability. Your new bar chair is now ready to use!





OUR 2 YEAR GUARANTEE

our products come with a 1 year guarantee
to give you peace of mind shopping



WHAT THE GUARANTEE COVERS



PRE-INSERTED FIXINGS

e.g. loose metal threads



FAULTY JOINTS

e.g. legs bending



EXTERNAL FIXING FAULTS

e.g. metal discs removing
from table top



STRUCTURAL INTEGRITY

e.g. the frame of the
product