


User Manual

Table and 4 chairs set

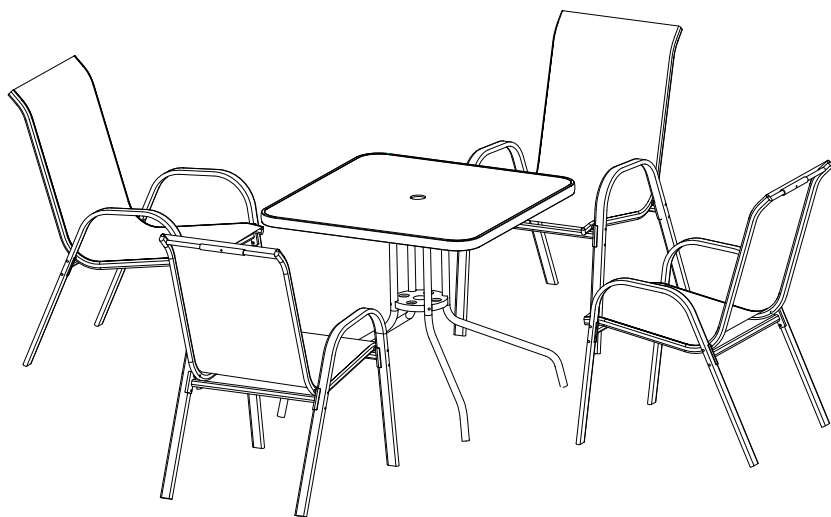

Model: BP1024

Please read the instruction manual carefully and use it correctly according to the usage instructions.
Please keep the instruction manual properly for reference!

Guide to Assembling

WARNINGS FOR ASSEMBLY AND USE

The assembly must be carried out by 2 adults. Remove stickers and protective papers before assembly and use. Before proceeding with the assembly make sure that all components are present in the packaging.

Observe the general safety rules during assembly.

To properly assemble the item, carefully follow the assembly instructions attached here.

The item should be mounted on a solid, flat surface free of anything that could damage it. Mounting on an uneven surface such as concrete can cause instability and may result in bumps or scratches that could damage the item.

Before using the item, make sure it is well assembled.

It is not recommended that the product be shaken or subjected to excessive impact. Do not hit the surface with hard and/or sharp objects. The product is intended for home use.

MAINTENANCE WARNINGS

Keep the object away from heat sources. Do not use aggressive cleaning products for cleaning. Clean with a damp cloth and dry.

In order to keep the items and their metal parts in good condition, it is essential that it is not left out in the elements. The product should be stored in a clean and dry environment with any moisture removed with a dry towel before storage to prevent corrosion.

It is recommended that the tightness of the bolts should be checked periodically to ensure nothing has come loose. Always checking before the first use, after removing the item from storage.

Warnings and Cautions

Please retain this instruction for future usage and read carefully before assembly.

Make sure you have all the parts & hardware as item list shows.

2 adults are recommended to install your chair.

Do not discard any of the packaging until you have checked that you have all the parts and pack of fittings.

Check all bolts for tightness before use, and periodically check and tighten bolts ensure your chair works properly.

Some parts might have sharp edges/corners. Please follow basic safety precautions to reduce the risk of hurts.


Notes

- 1.Chemicals water might cause fading.
- 2.Cleaning and drying the chairs after it rains.
- 3.Cleaning and drying the chair in time if exposed to chemicals.
- 4.Please cover and store it if not in use.



THIS ITEM CONTAINS SMALL PARTS WHICH CAN BE SWALLOWED BY CHILDREN.
PLEASE KEEP IT AWAY FROM CHILDREN UNDER 3 YEARS OLD AND PETS DURING INSTALLATION.


READ AND SAVE THESE WARNINGS FOR FUTURE REFERENCES

A  4PCS	B  8PCS	C  8PCS	D  4PCS	E M6X53  16PCS	F M6X72  16PCS
G  M6 64PCS	H  32PCS	J  32PCS	K  M6 32PCS	L  $\Phi 13 \times 5 \text{mm}$ 16PCS	 1PCS

NOTE: Legs B have been matched and tied together before leaving the factory.
Therefore, to assemble a chair, disassemble a pair of legs B.
Please do not mix all the legs together!


Have an issue? Let us help withal

READ AND SAVE THESE WARNINGS FOR FUTURE REFERENCES.
If you have any questions or requests, pls feel free to contact us.
We will try our best to help you.




Compare two legs B to see if they are exactly the same.

1



If it is different, gently press or pull the lower end of the leg with your hands.

2




Make sure two B legs are exactly the same shape before installation.

3

1




Please pull the fabric into place before assembling if it retracts.

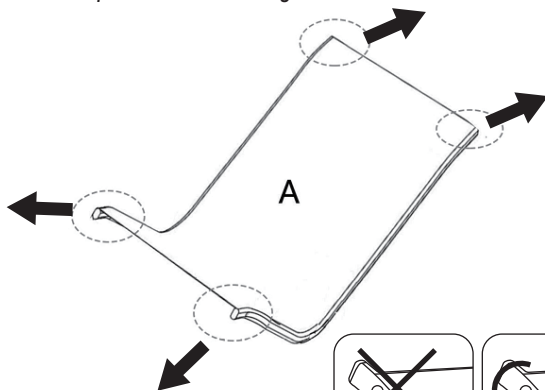

The screw holes on the side bars should face inwards, otherwise the backrest bar will not be installed correctly.

2

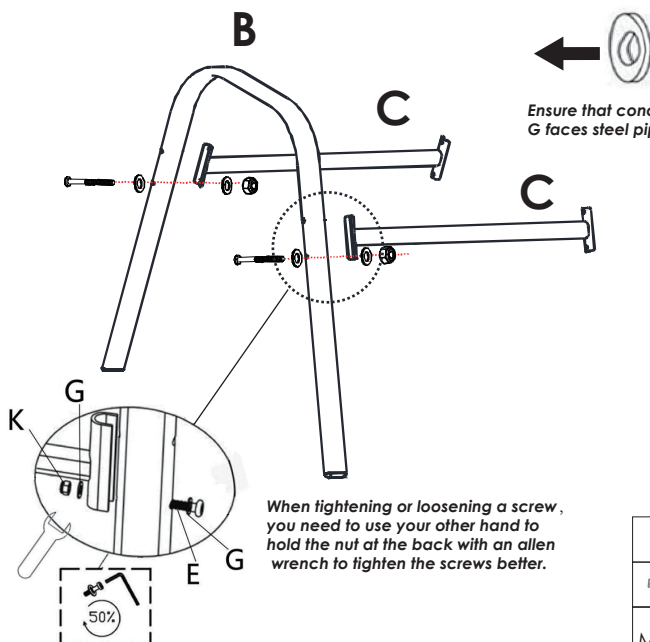



Ensure that concave surface of G faces steel pipe connection.

When tightening or loosening a screw, you need to use your other hand to hold the nut at the back with an allen wrench to tighten the screws better.

Temporarily tighten the screws to 50% and do not tighten them fully so that the subsequent screws can be better aligned with the screw holes.

	B x1
	C x2
	M6X53 E x2
	G x4
	M6 k x2

3

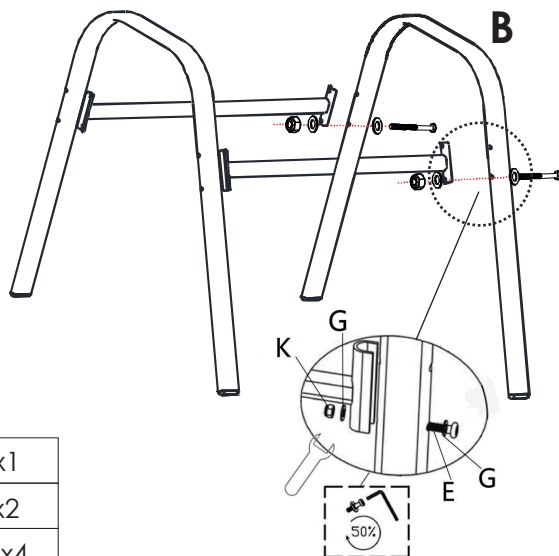


Ensure that concave surface of G faces steel pipe connection.

	B x1
	M6X53 E x2
	G x4
	M6 k x2


Temporarily tighten the screw to 50%, do not tighten completely.

4

You need to know this before step 5

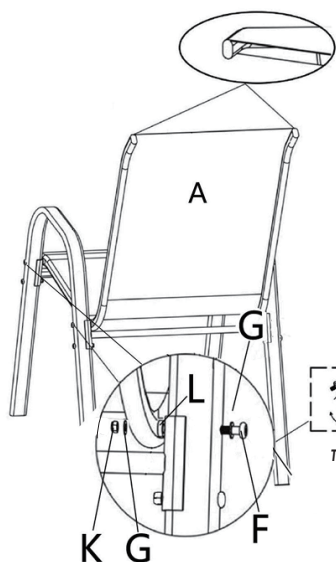


Slightly curved edge of accessory A is the top of the backrest.



Front legs are angled almost perpendicular to the ground.



Tighten screws to 20%




Ensure that concave surface of G faces steel pipe connection.

5

Install the screws for the back legs

You need to first lay the chair down with the back legs facing upwards and tighten the back leg screws by 20%.

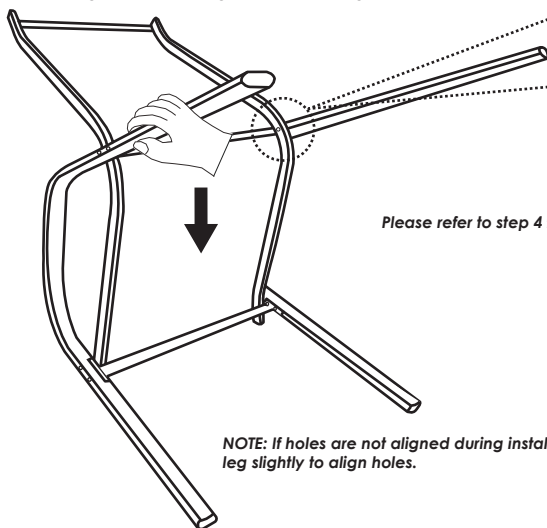

Please refer to step 4 for the correct order of installing the screws.


NOTE: If holes are not aligned during installation, press the leg slightly to align holes.

	A x1
	F x2
	G x4
	L x2
	K x2

6

Install the screws for the front legs

Then flip the chair over so the front legs are facing up and tighten the front leg screws by 20%.

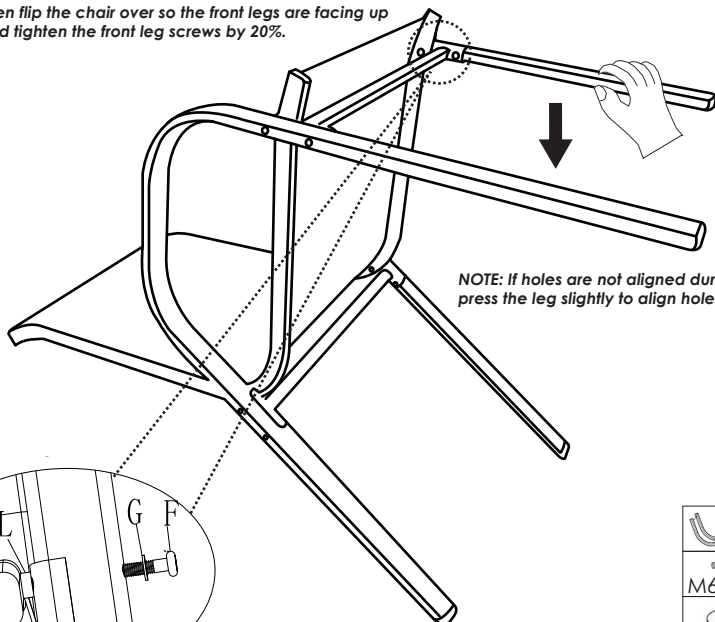


NOTE: If holes are not aligned during installation, press the leg slightly to align holes.

Please refer to step 4 for the correct order of installing the screws.

	A x1
	F x2
	G x4
	L x2
	K x2

7

When inserting the backrest rod, you need to rotate it first to shorten its length and gently pull the side rod for better insertion.

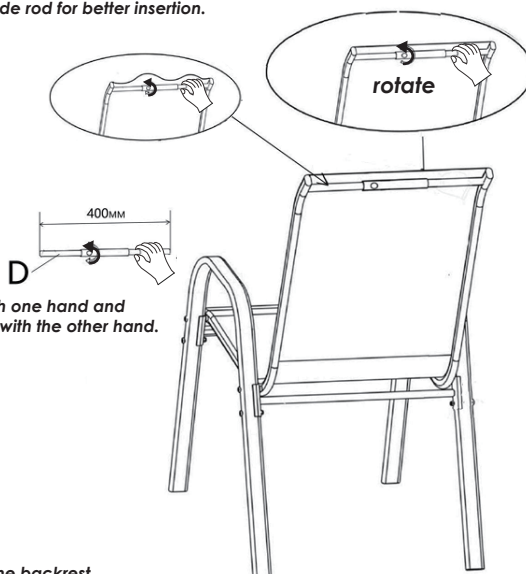


Hold one end of D with one hand and rotate the center of D with the other hand.

Adjust the length by rotating the backrest rod to fully spread the fabric.

8

Assemble on flat ground.

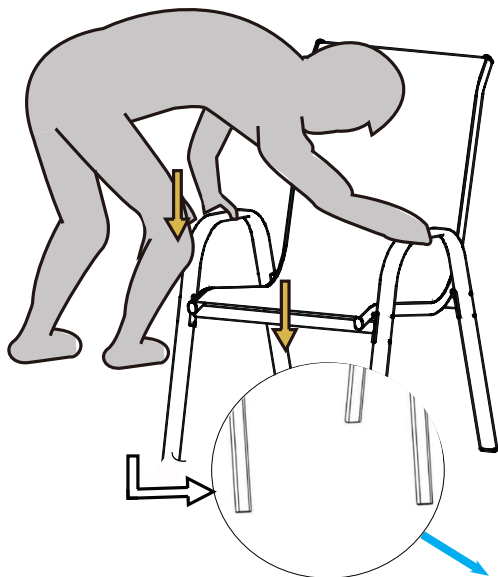


Make sure all 4 legs of chair are in full contact with the ground.


How to prevent chair from being uneven after installation?

1. Please place the chair on a flat ground for installation.
2. While tightening screws, continuously adjust the chair legs until they are stable.

9

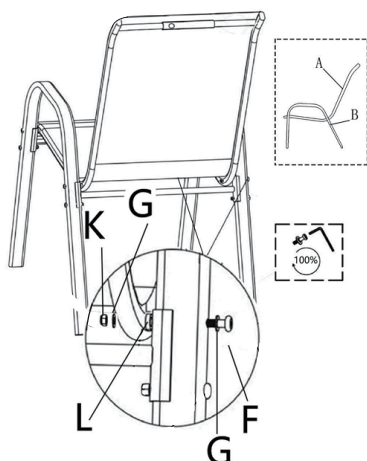

If chair is unstable after installation, slightly loosen all screws and fine-tune leg and frame position. Then retighten all screws.



Ensure that concave surface of G faces steel pipe connection.

NOTE: If holes are not aligned during installation, please press the B leg slightly to align holes.

Tighten all screws completely.


M6X72 F x2

G x4

K x2

L x2

10

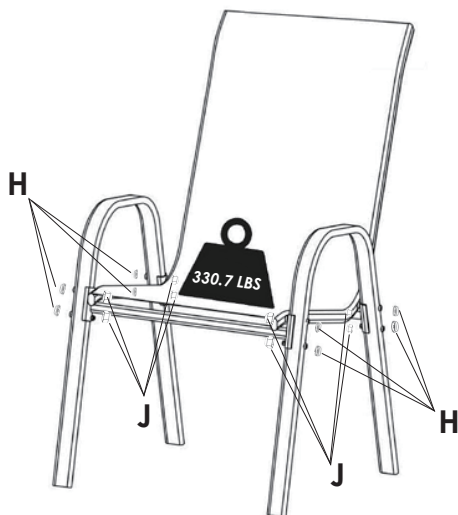

After tightening all screws, install the H and J plastic nuts.



1 Per.





Max load capacity: 330.7 LBS

H x8


J x8

Accessories

A  1PCS	B  4PCS	C  2PCS	
D  8PCS	E  8PCS	F  8PCS	 1PCS


Assembly

1




Please handle with care to prevent the glass from breaking.

2

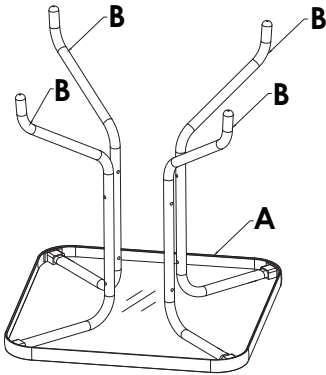

3

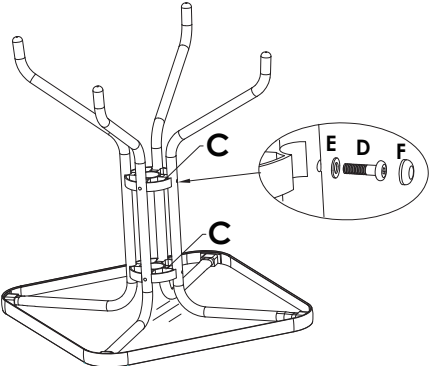

4



Manufacturer: Zhejiang Yitong Industry and Trade Co., Ltd.
Address: Wuyi Economic Development Zone Wenzhou Industrial City

Made in China 