




FRONT ELEVATION

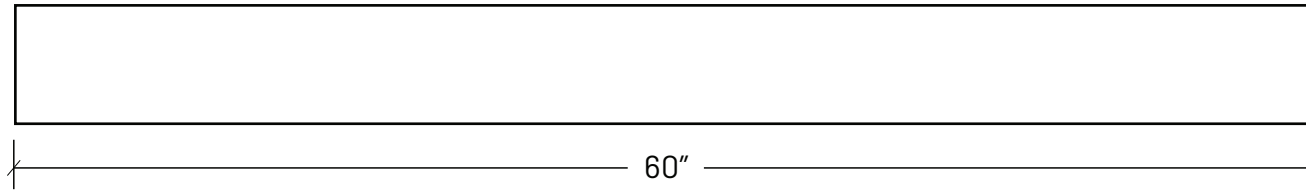

SIDE



REAR ELEVATION



58.5" L x 1.125" D x 0.25" THICK  
CLEAT ADHERED TO TOP REAR





CONCRETE IS  
0.75" THICK  
THROUGHOUT

PLAN VIEW



**SPECIFICATIONS**

- DIMENSIONS: 60 L X 5.5" H x 8" D
- WEIGHT: 78 LBS
- FEATURES A 0.25" X 1.125" SAFETY CLEAT
- INDOOR & OUTDOOR USE
- CONCRETE IS 0.75" THICK THROUGHOUT
- TWO SUPPORT BRACKETS & 4 LAG BOLTS INCLUDED
- CAN BE MOUNTED TO WALL STUDS OR CMU SURFACES (TAPCON SCREWS NOT PROVIDED)

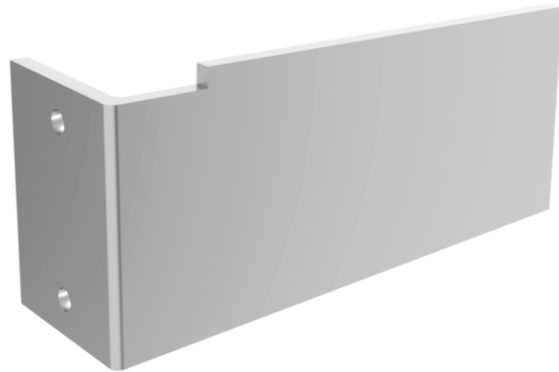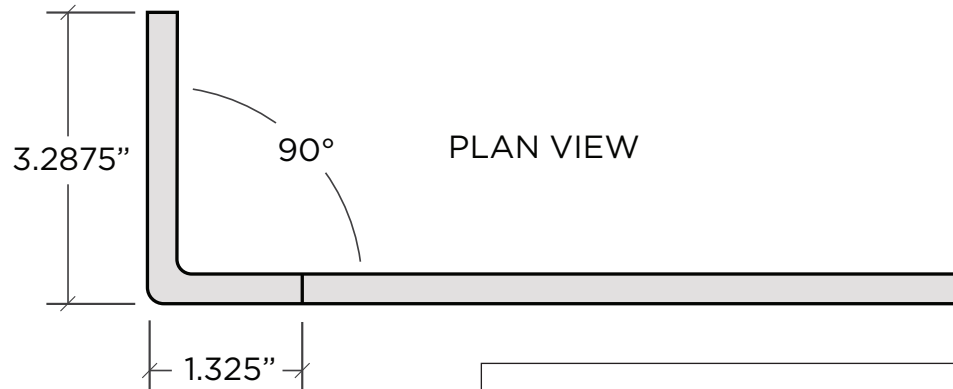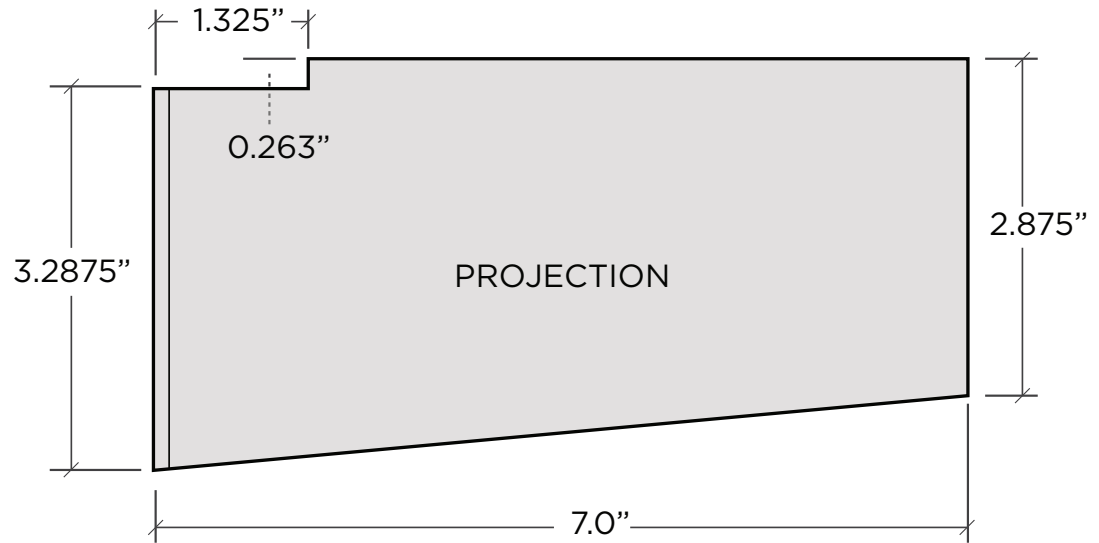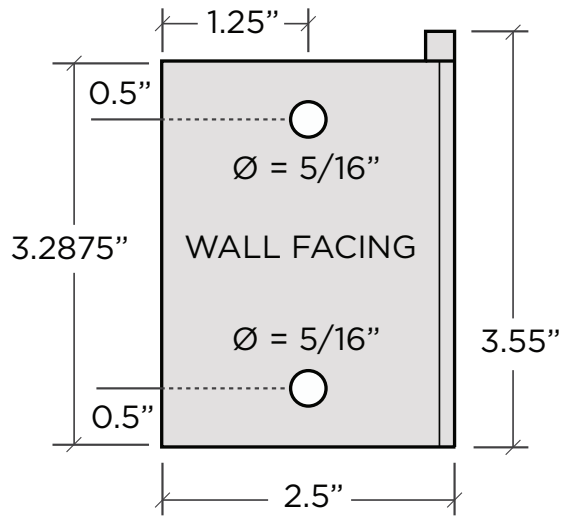

### SPECIFICATIONS

- DIMENSIONS: 7" x 3.55" x 2.50"
- 1/4" THICK BENT STAINLESS STEEL
- FEATURES A RECESS TO HOLD SAFETY CLEAT
- INDOOR & OUTDOOR USE
- LEFT & RIGHT VERSIONS
- 4 LAG BOLTS INCLUDED
- CAN BE MOUNTED TO WALL STUDS OR CMU SURFACES (TAPCON SCREWS NOT PROVIDED)