



Thank You for purchasing the Digger!

WARNING! To be assembled by an adult .


Tools needed for assembly:

#2 Phillips screw driver & #10 Metric wrench, #10 socket / ratchet wrench or adjustable wrench

Assembly Instructions:


#1-Bolt on the seat using the 2-6x25MM bolts, washers & lock nuts provided see Fig.1A.

#2-Bolt on the scoop using the 2-6x15MM bolts & lock nuts provided see Fig. 2A.

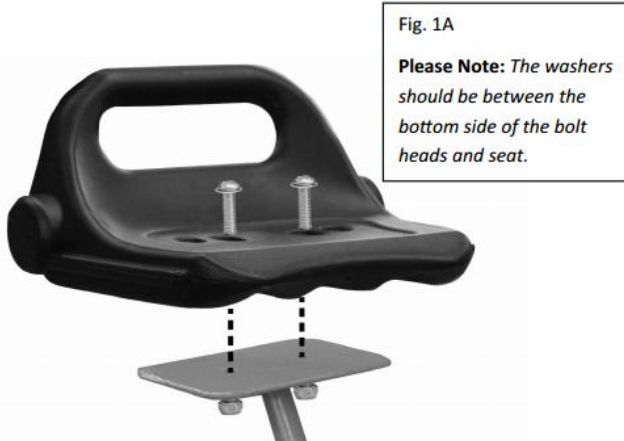


#3-Insert the short axle to the front Base tube ,attach 1 wheel on each side , fix it by a block shot .

Using this way to assemble another 2 wheels on rear base tube .

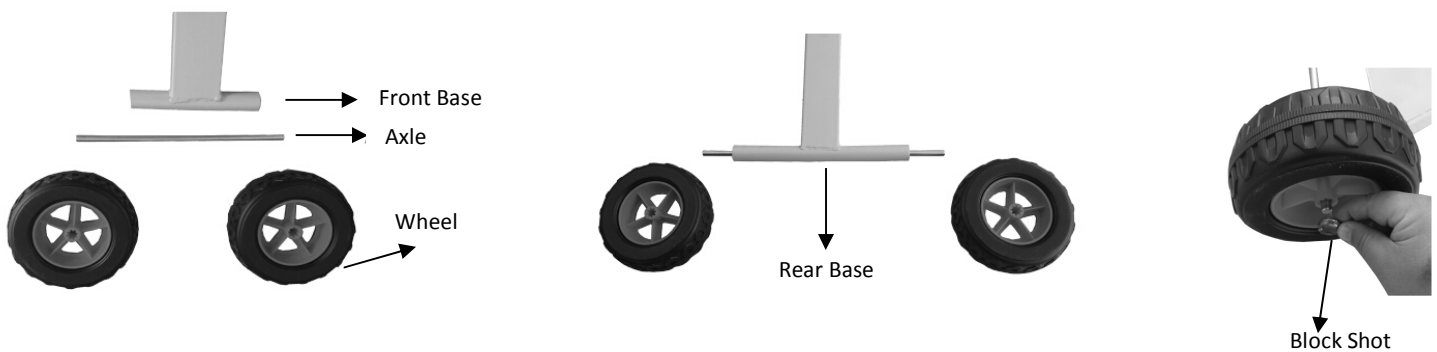

#4-Insert the Digger arm assembly into the base ,

Fixed by a washer and a pin as shown below in Fig.3A .

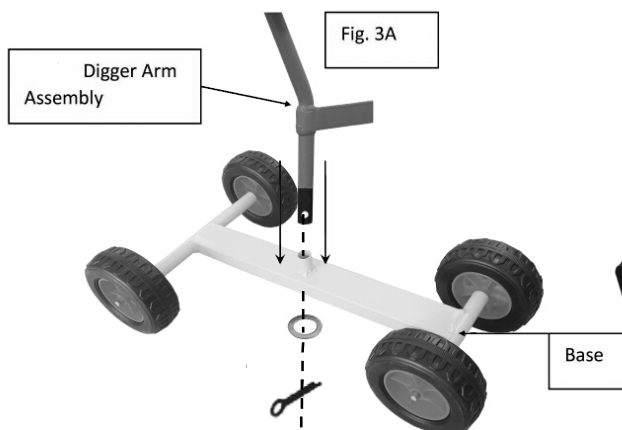

Completed Digger



Use & Care:

- After assembly / before first use , check the bolt connections , the bolt connections can be tightened or loosened to optimize the operation of the Digger for your child by using the same tools noted above .
- Storing in a dry location when not in use will help to extend the life of your Digger .
- Periodic lubrication of the bolt joints with a basic lubricant will help extend the lift span of the joints.