

EL918ICA

6" Line Voltage New Construction
Sloped Ceiling Housing



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

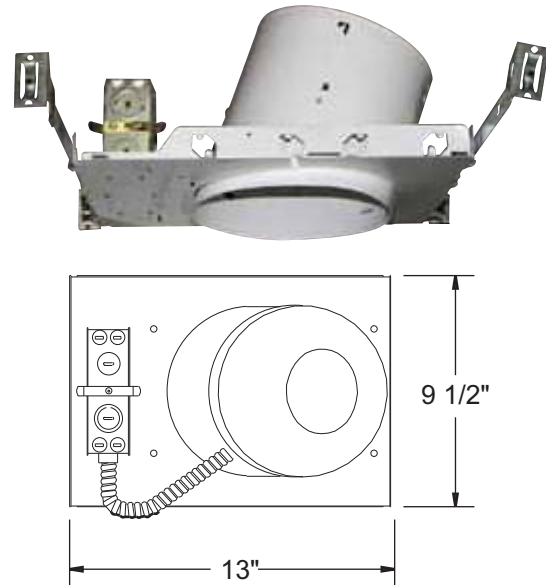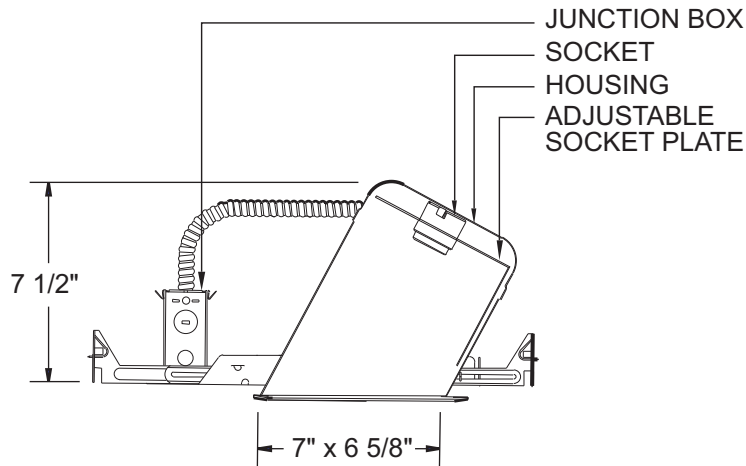

PRODUCT SPECIFICATIONS

- Single wall IC construction, for use in insulated ceilings.
- 7 1/2" height allows for use in 2 x 6 construction.
- Adjustable housing accommodates up to 1 1/4" ceiling thickness.
- For use in sloped ceiling with 5/12.
- Housing meets restricted air flow requirement (per ASTM E-283).
- CA Title 24 compliant (as low efficiency luminaire).
- Trims sold separately.

Lamp: 75W Max 120V, A19/A21/R30/PAR30L/PAR30

Lamp Holder: Medium base socket

Labels: U.L. listed for damp locations
U.L. listed for feed through
U.L. listed for direct contact with insulation

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockouts. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Captive bar hangers span 24" and can be repositioned 90°. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel construction for corrosion resistance

CATALOG NUMBER

Example: EL918ICA

See trims page for variety of trims available