



Shift® Ellipse | K-45415-A

Multifunction handshower with Metallic handle, 2.0 gpm

Features

- Multifunction handshower offers full coverage and targeted massage spray settings
- Ergonomic design is comfortable and easy to grip
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.0 gpm (7.6 lpm) maximum flow rate
- Contains flow-regulating check valve for backflow prevention
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 23:32 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.



OBC

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
OBC

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2 gpm (7.6 l/min)
Flow:

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories


- K-8593 72" metal shower hose
- or
- K-9514 60" metal shower hose
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



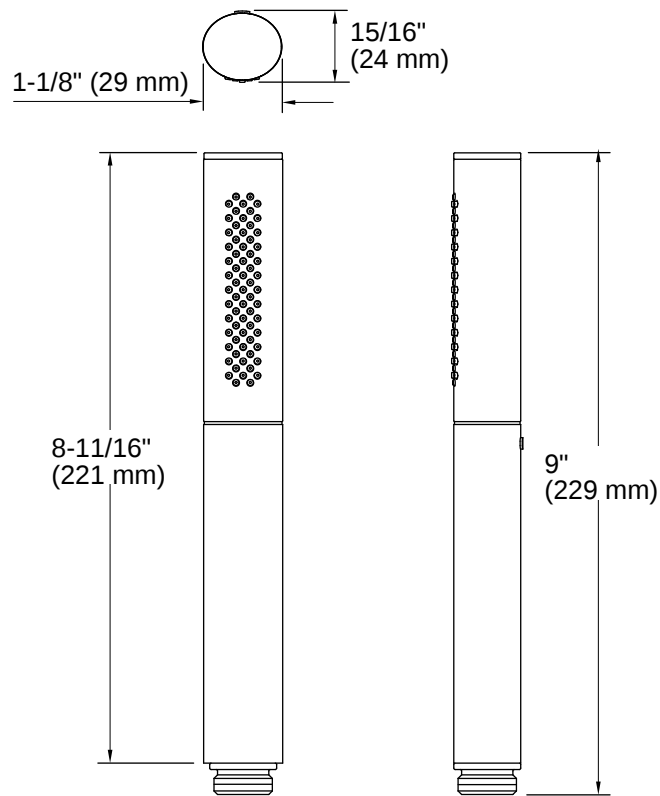

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.
 Note: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.

