


## INSERT RECIRCULATION DEFLECTOR KIT INSTALLATION INSTRUCTIONS

### Installation Accessories

Recirculation Deflector



### Additional Supplies Needed

The following installation accessories **are required** and must be purchased separately.

- 6" or 8" Round Metal Ductwork
- Duct Sealing Tape

### Tools Needed

- Screwdriver • Measuring Tape • Metal Snips
- Jig or Hole Saw



#### WARNING:

Turn off power at service panel and lock out panel before installing this kit. Installation must comply with all local codes. Wear gloves to protect from sharp edges.



To install the insert recirculation deflector kit, do the following:

#### For installation through the top of the cabinet:

1. Measure and mark a horizontal line at the center of the cabinet and a vertical centerline from the base of the cabinet to the ceiling.
2. Mark the intersection of the two lines and use a jigsaw or hole saw to cut a hole for the deflector.

DEFLECTOR SIZE	HOLE SIZE
6"	6-7/64"(15.5cm)
8"	8-5/64"(20.5cm)

3. Install metal ductwork from the top of the insert through the top of the cabinet. The ducting should be cut so that it sits flush with the top of the cabinet.
4. Attach the recirculation deflector to the top of the cabinetry with two 4.5 x 13mm screws.
5. Use duct sealing tape to seal the duct joints to the deflector and top of the insert.

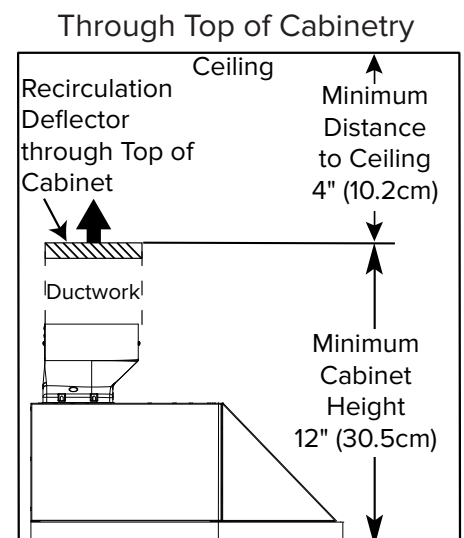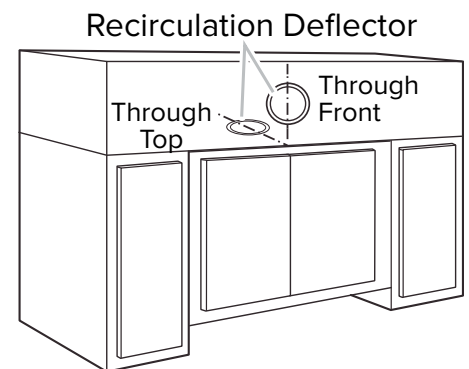

**For installation through the front of the cabinet:**

1. Draw a vertical centerline from the base of the cabinet to the ceiling.
2. Choose where you want the deflector to exit the front of the cabinet and make a crossmark on the vertical centerline.
3. Use a jigsaw or hole saw to cut a hole in the front of the cabinet.

DEFLECTOR SIZE	HOLE SIZE
6"	6-7/64" (15.5cm)
8"	8-5/64" (20.5cm)

4. Install metal ductwork from the top of the insert to the hole in the front of the cabinet.
5. Attach the recirculation deflector to the front of the cabinet with two 4.5 x 13mm screws.
6. Use duct sealing tape to seal the duct joints to the deflector and top of the insert.

