


Solar Outdoor Light

Instruction Manual



Solar




Button Switch



Rechargeable




Motion Sensor

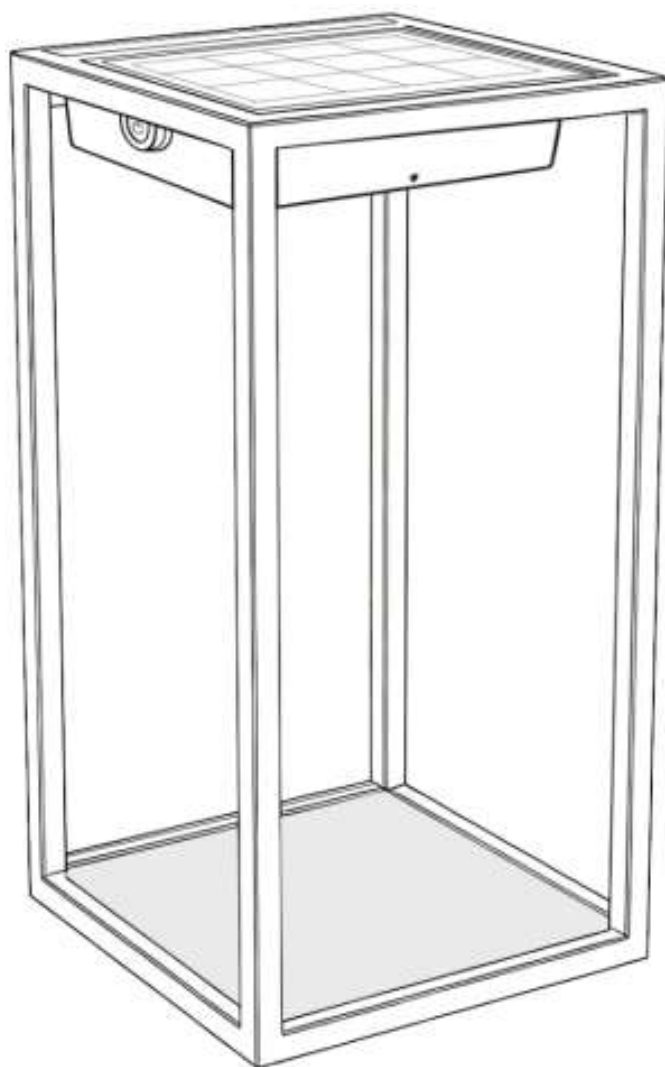


MADE IN CHINA


Installation Steps

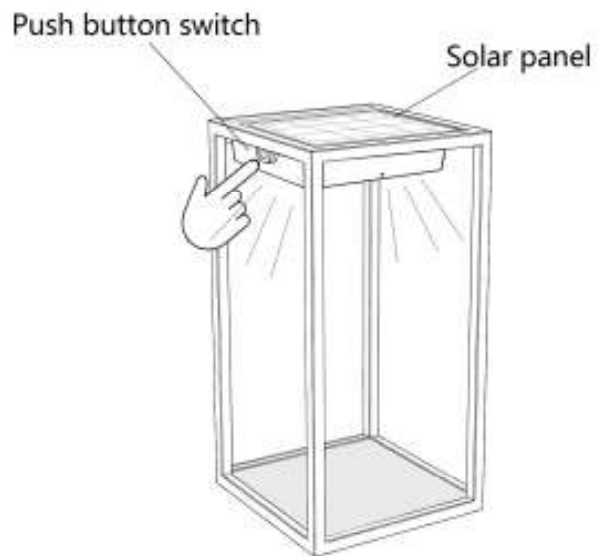

1

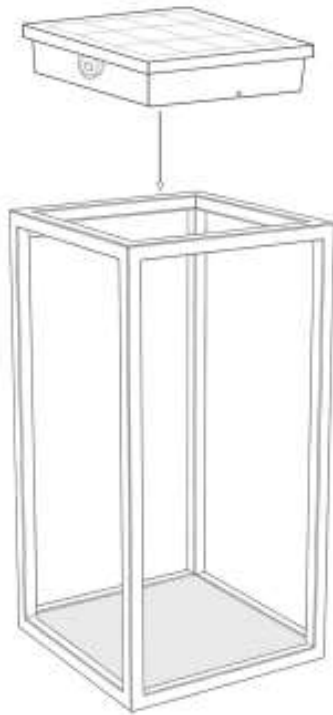

2

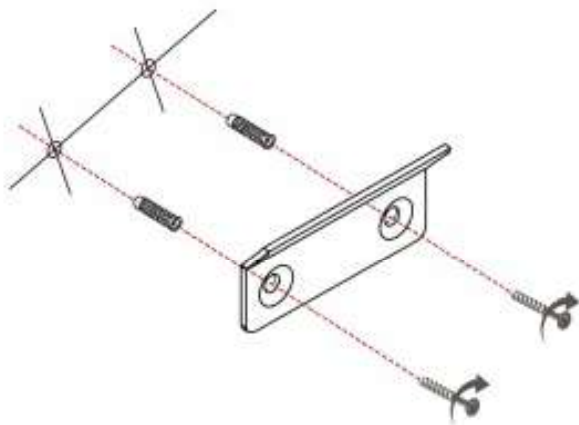


3

Align and plug into the bracket



Solar Panel

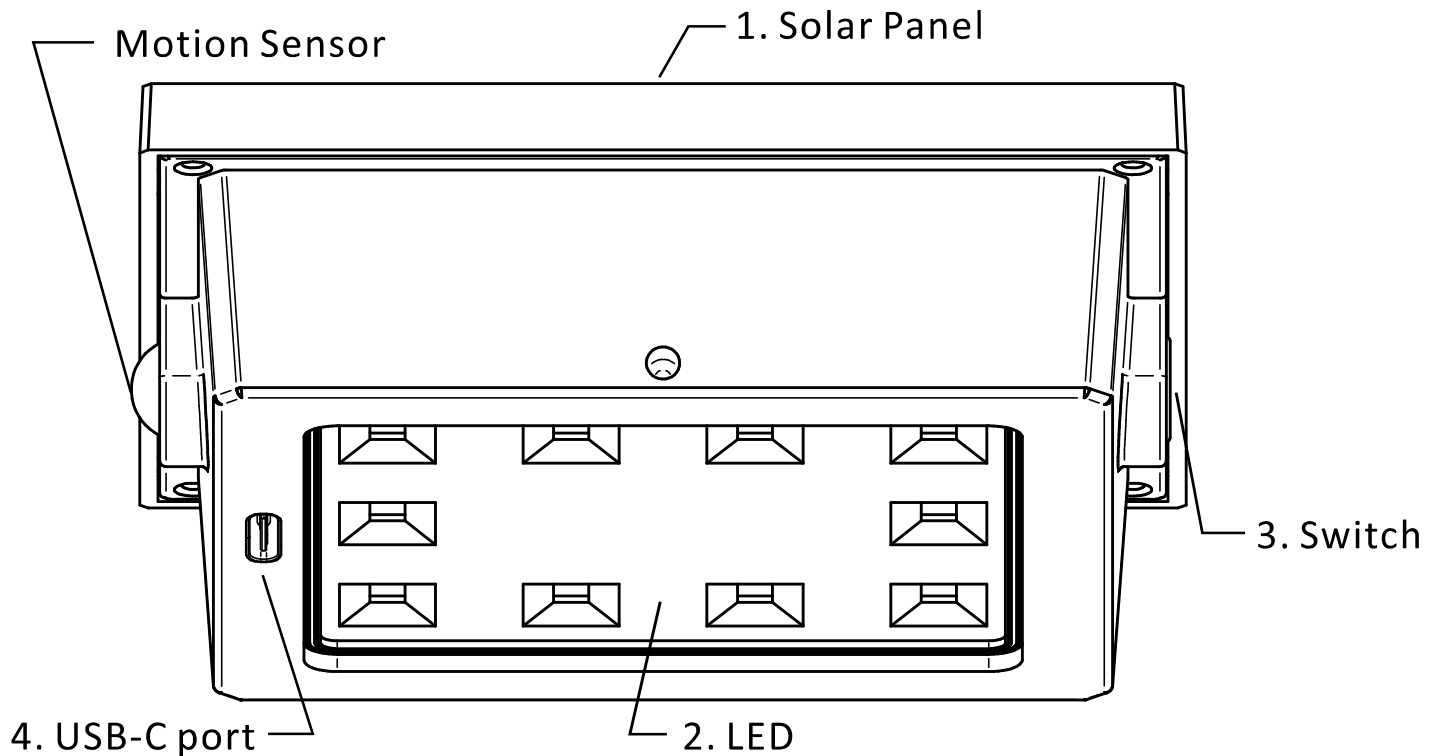

1. Solar Panel

Sun Power : 12 cells 2.4 watts

ETFE coating for greater durability:

- Operating temperature up to a constant 150°C.
- Extremely solid fluoropolymer resin.
- Mechanically resilient coating.

2. LED

High power LED: 500 LUMENS

Color temperature: 2700K (warm white)

3. Switch

***see Switch and Motion Sensor

4. USB-C Port

You can use the USB-C cable we provided to charge the product

ASB HOUSING

Made of ABS, shock resistant, light, and rigid.
Anti-UV treated.

Two 2.6 Ah lithium batteries replaceable,
lifespan of 4 to 6 years.

Switch and Motion Sensor

One button for 4 operation models:

1. Dimming Sensor Mode – Stays on dim and switches to full brightness when motion is detected.
2. Sensor Light Mode – Remains off and activates full brightness only when motion is detected.
- 3: Keep light on with 30% brightness
4. Turn off completely if you want to stop using them.



About Charging


- SOLAR CHARGE: 8 hours in optimal conditions.

While charging, 3 short flashes every 10 seconds show that the battery is 75% full.

- USB charge: 4 hours

the red light will be shown while charging , when full charged the red light will be turn off

Product Description

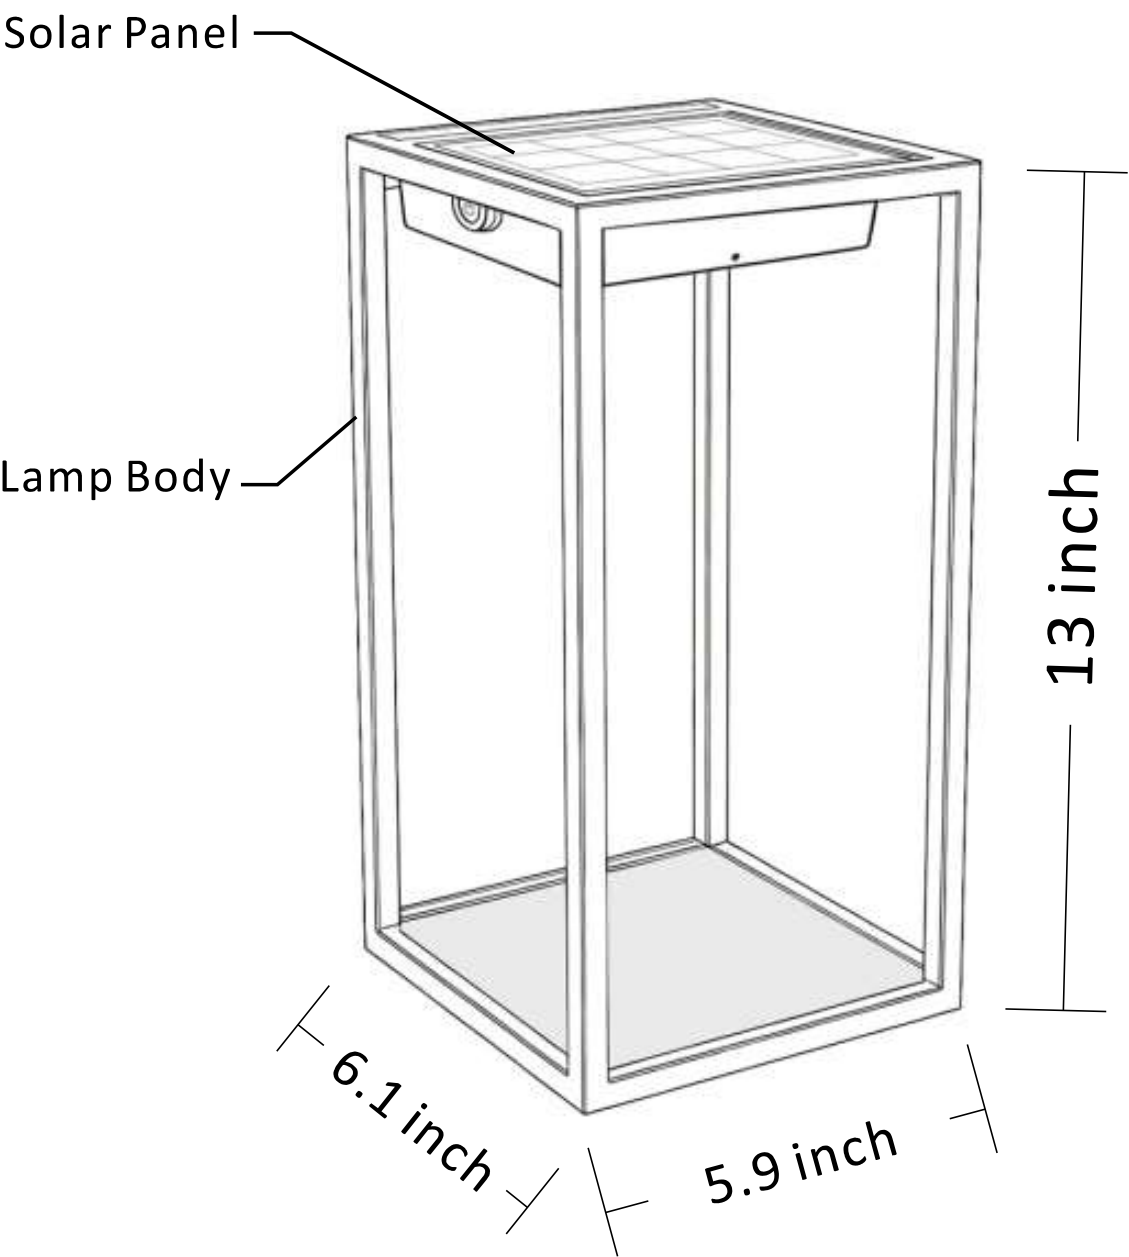

Parameter Information

Product Name:	Solar Outdoor Wall Sconce
Main Material:	Metal and Plastic
Switch Type:	Button / P.I.R.
Rated Input:	Solar / USB 5V $\overline{=}$ 2A
Rated Power:	4W
CRI. :	≥ 80
Color Temperature:	3000K
Battery Capacity:	4000mAh

Precautions

1. Note: please use the charging cable we provided. Other cables may not be compatible and could cause charging failure.
2. Do not dispose of this product as household waste. Follow local regulations for the disposal of electronic products.
3. The operating temperature range is -15°C to 50°C.
4. Charge the product regularly to avoid completely draining the battery before recharging.
5. When cleaning the lamp surface, use a soft, dry cotton cloth to prevent scratches.
6. Do not use abrasive or corrosive cleaners on the lamp surface, as they may damage the finish.

Warranty

*If the product has quality issues due to manufacturing defects or damage, please contact us within 30 days of purchase, and we will provide free repair or replacement.

*If you are unsatisfied with the product, receive a damaged item, we offer a free replacement or full refund.

*We are here to help! For any questions or problems to ensure a smooth setup, please contact us

Not Covered by Warranty

*Unauthorized repairs, misuse, impact, abuse, or liquid damage.

*Expired warranty period.

*Man-made damage.