


Assembly Instructions

Bruno Console Loveseat

BEFORE ASSEMBLY

Thank you for purchasing this quality product. This product has been designed for easy assembly and constructed for durability. Please take the time to read and follow the assembly instructions carefully.

Manual Console Loveseat

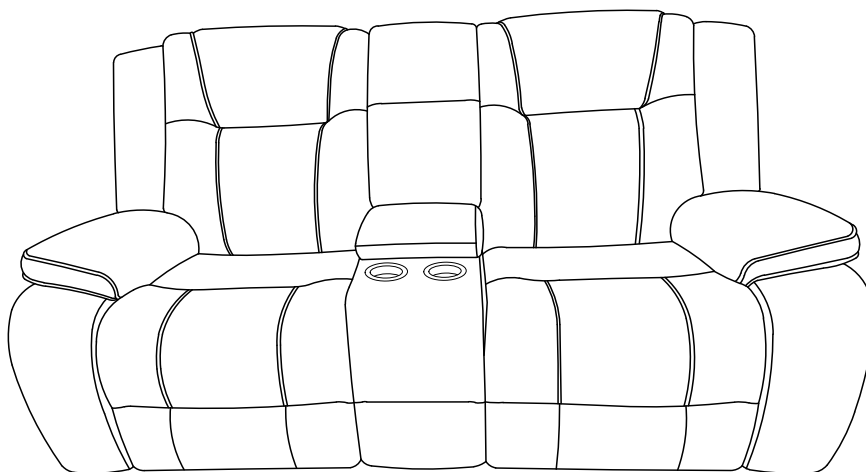


Part List

When unpacking, please be careful not to discard any parts with the packaging. Before continuing, please make sure you have the following parts:

No	Description	Sketch	Qty
A	Body		1 PC
B	LAF Back Cushion		1 PC
C	Middle Console Back Cushion		1 PC
D	RAF Back Cushion		1 PC
E	LAF Wing		1 PC
F	RAF Wing		1 PC
G	LAF Armrest Cushion		1 PC
H	RAF Armrest Cushion		1 PC
J	Screws		4 PCS
K	nuts		4 PCS


Step 1

1. Take out the LAF Armrest Cushion (G) and RAF Armrest Cushion (H) from the bottom of the armrest.
2. Remove the hardware accessory package from underneath the body (A).
3. Locate the console back cushion (C) behind the seat (A). Then remove the back cushion from the seat.

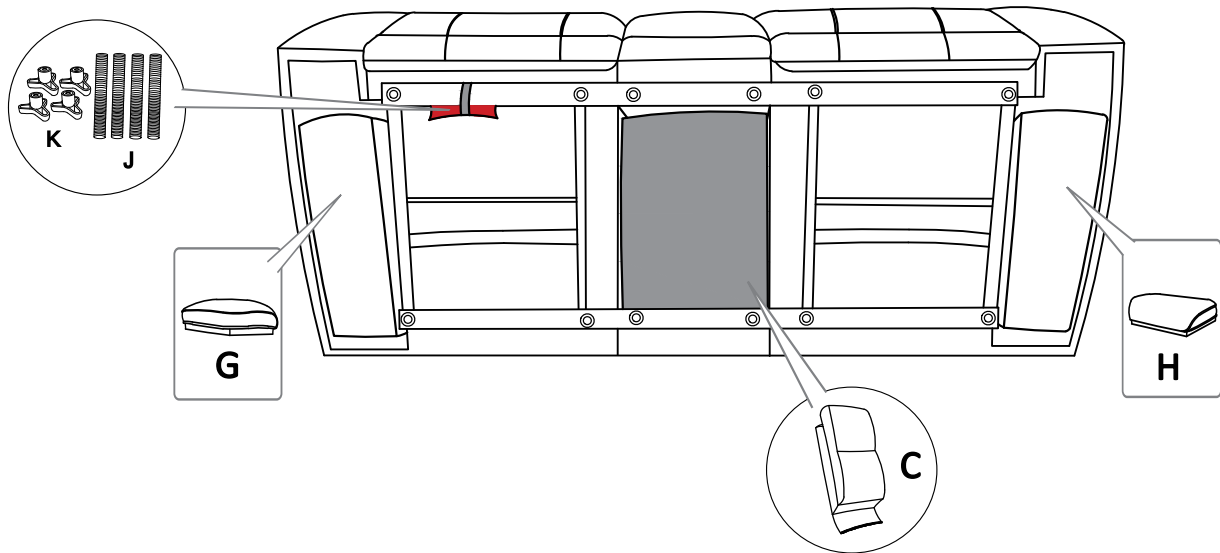


Step 2

Insert the screws (J) into the threaded holes on the armrest cushions (G, H), align them properly, and turn the screws clockwise until approximately one-third of each screw is inserted.

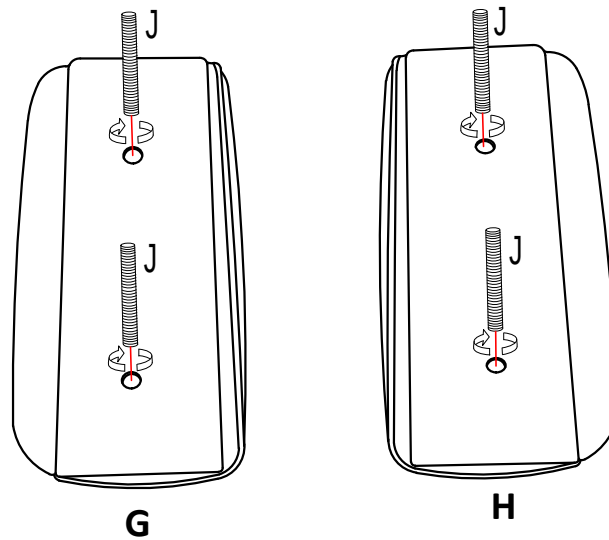


Step 3

Place the armrest cushions (G, H) onto the armrest frames of the seat body (A), ensuring that the screws are aligned with the pre-drilled holes. Once properly positioned, hold the cushions in place and carefully turn the seat body upside down for easier access. From underneath the seat body, attach the nuts to the screws on both sides of the armrests. Tighten the nuts clockwise until the armrest cushions are securely fastened.

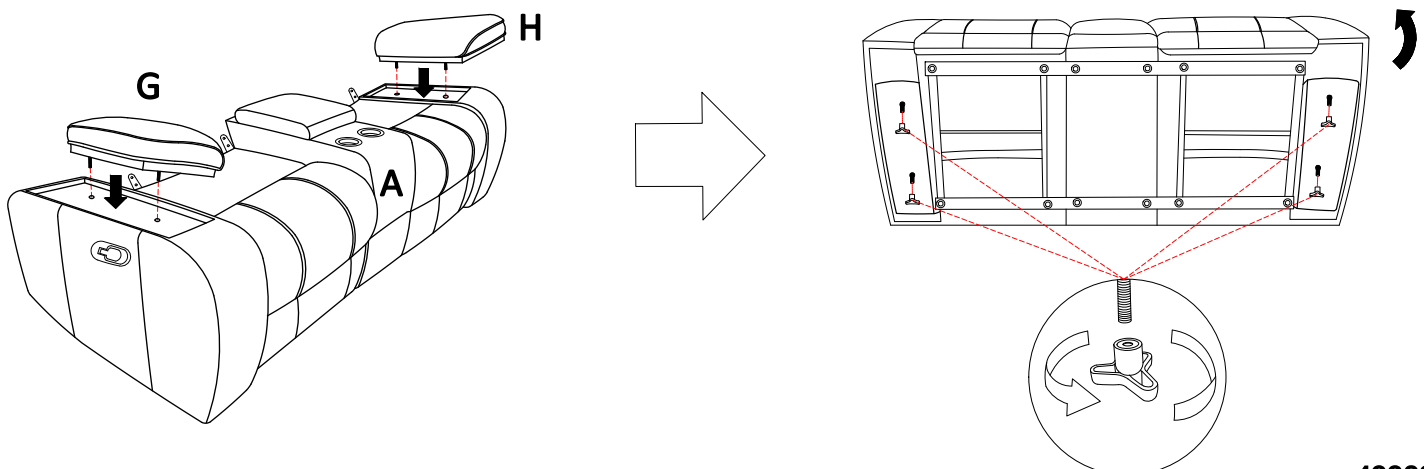


Step 4

1. Unscrew the knob screws from the console backrest (C).
2. Install the back cushion by inserting 2 screws into the pre-drilled holes on the control panel body. Place the control panel in line with the installed screws and screw from the bottom up to attach.

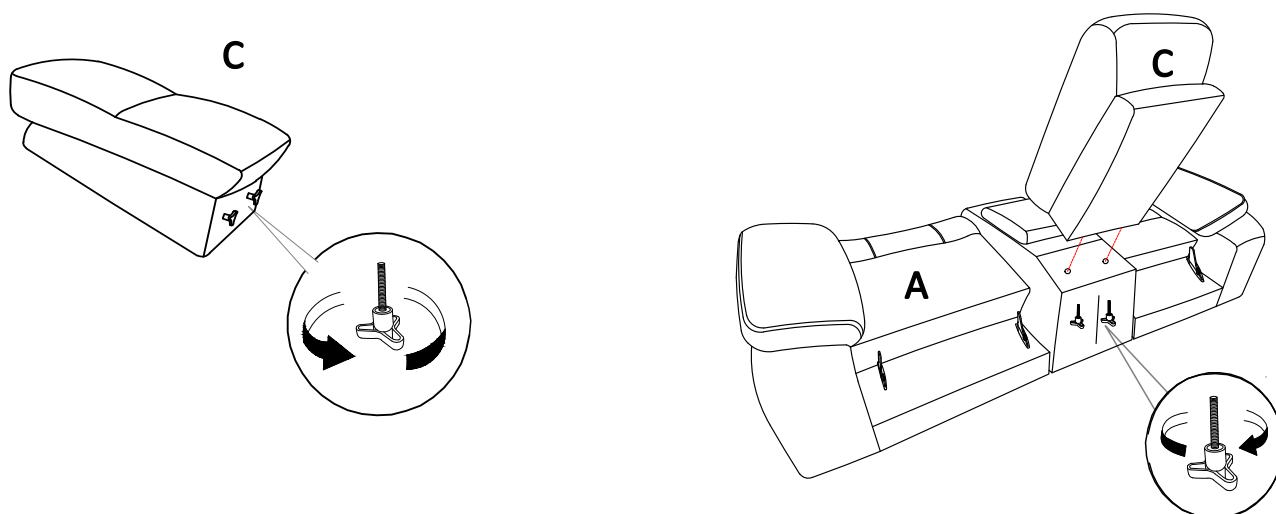


Step 5

Install the Backrest(B/D) into the Seat(A) by positioning the female metal receiver brackets over the male metal posts. Ensure that female metal receiver brackets on each side of the backrest are line up with the seat metal posts. Push down the female brackets over male posts simultaneously until each side is locked into place and an audible “click” is heard.

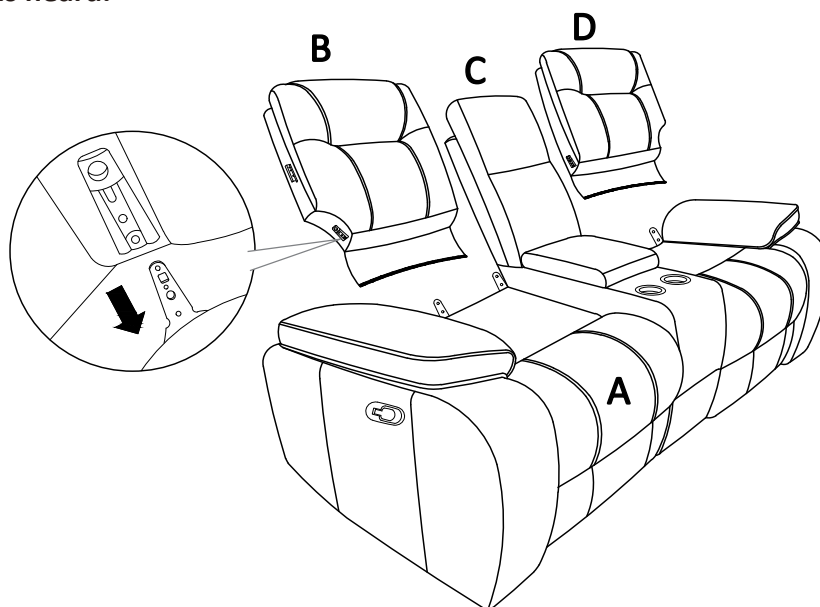


Step 6

Install the LAF Wing(E) and RAF Wing(F) by sliding wings in a downward motion along the side of the seat back to connect the brackets.

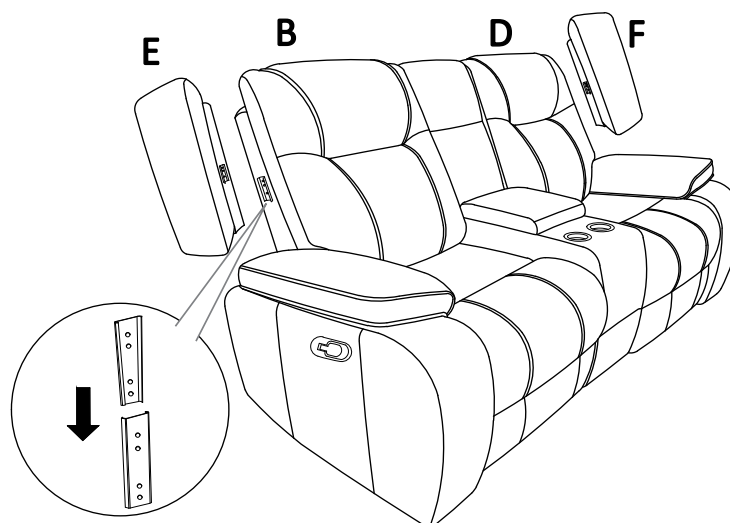


Step 7

Attach the flap to the seat frame by pulling the flap down, and pressing the bottom under the seat base, connecting the velcro.

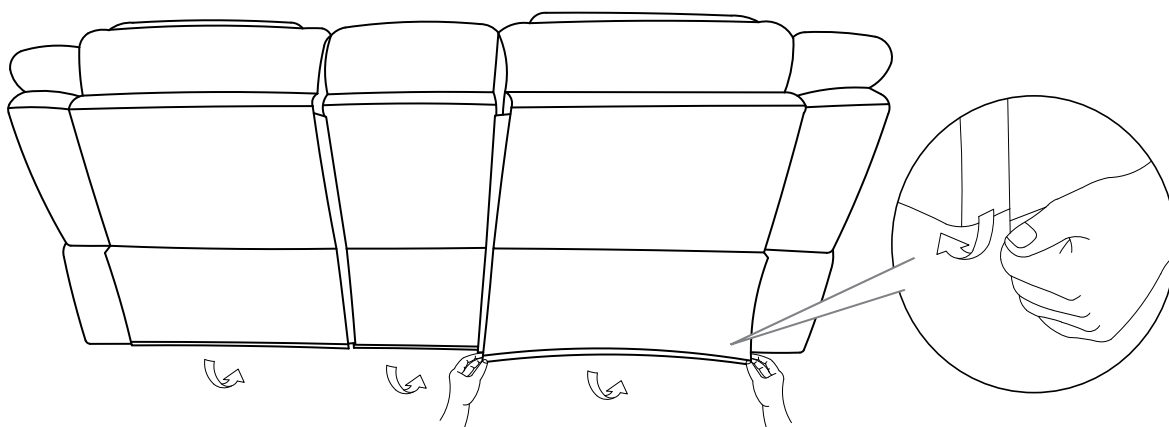

Step 8

Plug the power cord of the USB console charger into a wall outlet to supply power.

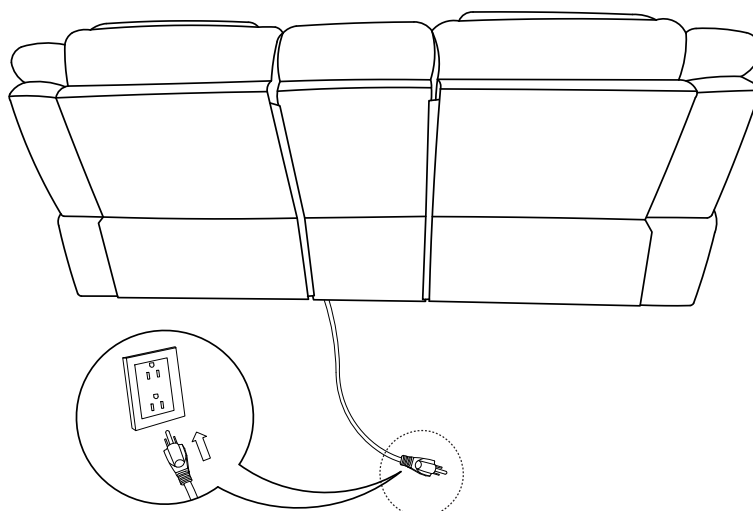

Function Display

