

IN ORDER THAT THE STAND YOU HAVE PURCHASED MAY BE SAFELY USED THE FOLLOWING INSTRUCTIONS MUST BE FOLLOW ED. WARNING: KEEP THE PLASTIC BAG AWAY FROM CHILDREN TO AVOID SUFFOCATION.

WARNING: This product is only suitable for a child who cannot sit up unaided

WARNING: Only use on a firm, horizontal level and dry surface

WARNING: Do not let other children play unattended near the carry cot

WARNING: Do not use if any part of the carry cot is broken, torn or missing

WARNING: Do not attach anything to the stand, which may affect its stability

Use only replacement or approved parts from Dawson Rodgers & Co Ltd.

Do not place the carry cot near an open fire or other source of strong heat

The handles and the bottom of the carry cot should be inspected regularly for signs of damage and wear

The head of the child in the carry cot should never be lower than the body of the child

If the mattress is purchased seperately, it shall fit well into the product and the depth from the top of the side of the product should be less than 170mm (200mm if to be used with a stand) when the mattress is in position of use

The stand is designed for use with a palm or wicker moses basket of min/max 700-835mm in length and 300-370mm in width.

Do not add another mattress on top of the mattress provided or recommended by Dawson Rodgers & Co Ltd

When not in use, the stand should be stored away from children. CLEANING INSTRUCTIONS

Stand - If necessary, wipe with damp cloth

Dispose of all packaging safely before use. Complies with BS EN 1466: 2014

Dawson Rodgers & Co Ltd, Shentonfield Road, Sharston Industrial Estate Wythenshawe, Manchester, M22 4RW - 0161 491 9800 / sales@clair-de-lune.co.uk

Tools Required





Phillips head Size 2 (PH2) screwdriver



To prevent damaging the screws during assembly, please ensure you use the right size and type of screwdriver.




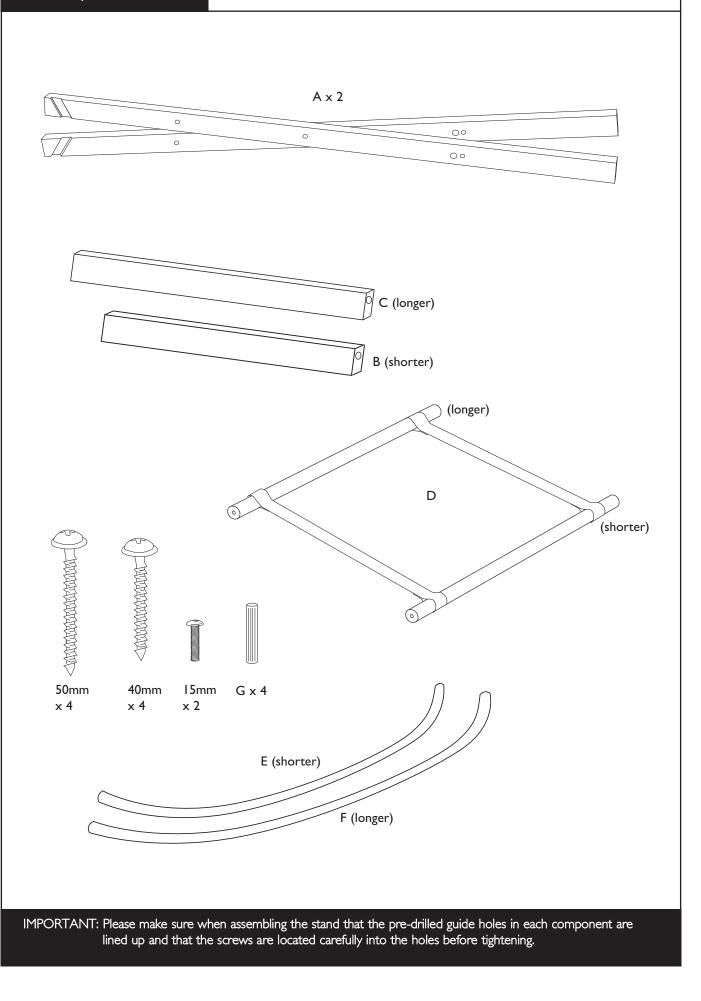

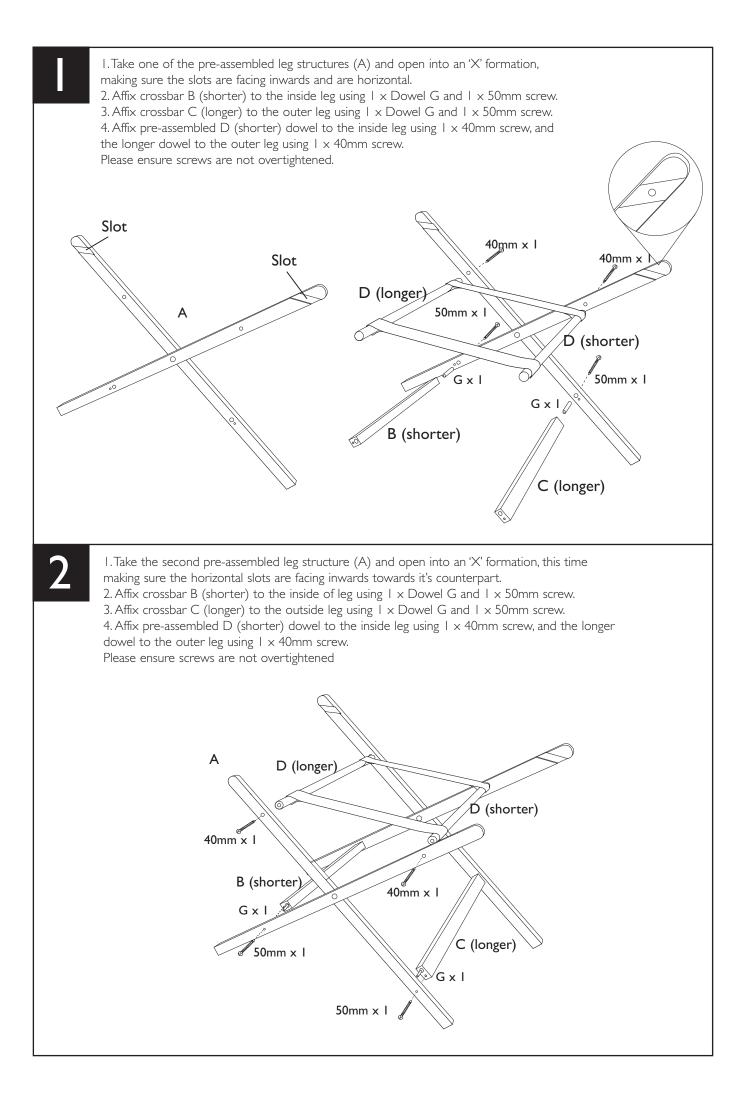

To attach straps:

- 1. Affix longer strap (F) into slots of outer legs using 2 \times 15mm screws.
- 2. Affix shorter strap (E) into slots of the inside legs using 2×15 mm screws.
- 3. Place basket onto stand and adjust the straps accordingly to create a snug fit.

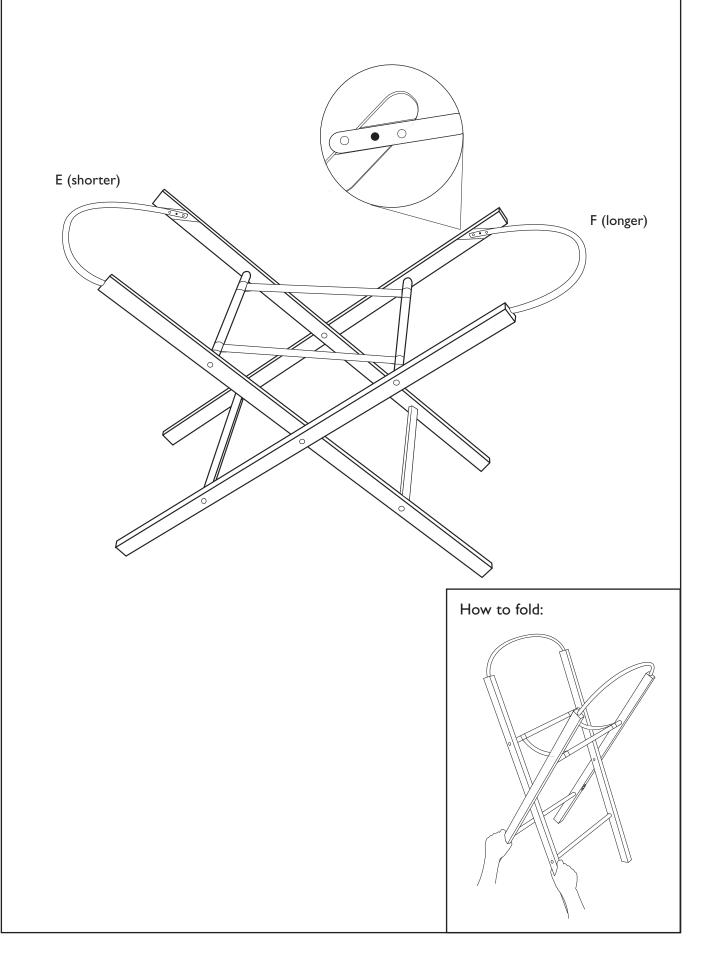

3