

Project: _____

Fixture Type: _____

Location: _____

Contact: _____

22" Linear LED Bath

Wall mounted • Damp location listed

Description:

LED bath and vanity fixtures in this collection highlight a classic form with contemporary updates. Brushed Nickel accents complement a Faux White Marble frame and canopy with a design that minimizes all visible hardware for an elegantly modern effect. Suitable for residential and commercial applications, fixtures can be installed vertically or horizontally to complement Modern, Luxe or Mid-Century interiors.


Specifications:

- Faux White Marble (painted)
- Steel construction
- Etched White Glass Cylindrical
- LED sconces in this collection highlight a cylindrical design paired with a square faux marble back plate
- 1-light 35-watt LED bath fixture
- This LED adds task lighting on either side or above a mirror to eliminate shadows on face when getting ready in the morning
- An integrated LED source provides a variety of energy and cost savings benefits for the homeowner
- Features Brushed Nickel end caps
- Measures 22 1/4"W x 4 3/4" H
- 53.8 lumens per watt
- Details highlight clean construction with no visible hardware
- This LED is suitable for both residential and commercial bathroom spaces
- Can be installed vertically or horizontally to accommodate Modern, Luxe or Mid-Century applications
- Warm white 3000K lighting color, 1942 lumens (delivered) and 90+CRI
- Damp location listed
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting plate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- Meets California Title 24 JA8-2016

Performance:

| | |
|------------------------|-------------------------------------|
| Number of Modules | 1 |
| Input Power | 35w |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW (Delivered) | 1942/52.9 (LM-79) |
| CCT | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 50,000 (L70/TM-21) |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Min. Start Temp | -10 °C |
| Warranty | 5 year limited warranty |
| Labels | cETLus Damp location listed |
| | Meets California Title 24 JA8-2016 |

Images:



Dimensions:

Width: 22-1/4"
Depth: 3-5/8"
Height: 4-3/4"
H/CTR: 2-3/8" (mounted horizontal)

Glass
Width: 2-3/8"
Length: 22-1/4"
Height: 2-3/8"

22" Linear LED Bath

Wall mounted • Damp location listed




Photometrics:

ELECTRICAL DATA

| | |
|-----------------------|-------------------------------------|
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Input Current | 0.292 A |
| Input Power | 35 |
| Power Factor | Greater than 0.90 |
| THD | <20% |
| FCC | Meets FCC Title 47, Part 15 Class B |
| Operating Temperature | -10 °C to |
| Dimming | Yes* |

*See Dimming Notes for more information

LED Light Engine: 3000 K 90 CRI
System Wattage: 35
Fixture delivered lumens: 1942
Fixture Efficacy: 52.9
Spacing Criteria: 1.87 | 1.26 | 1.04

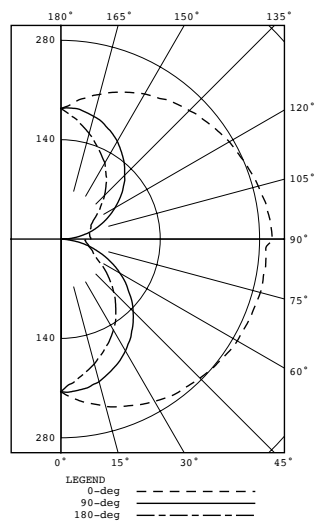

Test 18.00094 Test Date 02/01/18

CANDELA DISTRIBUTION

| CANDELA | DISTRIBUTION | | | FLUX | | |
|---------|--------------|------|------|-------|-------|-----|
| | 0.0 | 45.0 | 90.0 | 135.0 | 180.0 | |
| 0 | 215 | 215 | 215 | 215 | 215 | |
| 5 | 226 | 222 | 215 | 206 | 203 | 20 |
| 15 | 244 | 232 | 208 | 188 | 182 | 59 |
| 25 | 258 | 236 | 192 | 166 | 160 | 93 |
| 35 | 270 | 235 | 171 | 142 | 135 | 117 |
| 45 | 277 | 230 | 144 | 114 | 105 | 131 |
| 55 | 284 | 222 | 113 | 82 | 76 | 134 |
| 65 | 288 | 217 | 79 | 50 | 52 | 128 |
| 75 | 291 | 205 | 44 | 29 | 41 | 118 |
| 85 | 290 | 202 | 7 | 16 | 35 | 110 |
| 90 | 298 | 208 | 3 | 22 | 42 | |
| 95 | 296 | 206 | 17 | 24 | 41 | 116 |
| 105 | 288 | 205 | 46 | 31 | 42 | 119 |
| 115 | 278 | 205 | 74 | 46 | 47 | 122 |
| 125 | 268 | 209 | 102 | 71 | 63 | 123 |
| 135 | 256 | 211 | 127 | 96 | 87 | 117 |
| 145 | 242 | 211 | 149 | 120 | 111 | 103 |
| 155 | 228 | 208 | 167 | 141 | 133 | 81 |
| 165 | 211 | 202 | 179 | 161 | 154 | 51 |
| 175 | 192 | 190 | 185 | 178 | 174 | 18 |
| 180 | 184 | 184 | 184 | 184 | 184 | |

ZONAL LUMEN SUMMARY

| ZONE | LUMENS | %FIXT |
|--------|--------|-------|
| 0-30 | 172 | 9.8 |
| 0-40 | 290 | 16.4 |
| 0-60 | 554 | 31.5 |
| 0-90 | 911 | 51.7 |
| 90-120 | 357 | 20.3 |
| 90-130 | 480 | 27.3 |
| 90-150 | 701 | 39.8 |
| 90-180 | 850 | 48.3 |
| 0-180 | 1761 | 100.0 |

22" Linear LED Bath

Wall mounted • Damp location listed

Dimming Notes:

This collection is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

- Lutron - NTELV-300
- Lutron - DVELV-300P
- Lutron - Caseta Wireless
- Leviton – 6672
- Leviton – 6674
- Lutron - AYCL-153P
- Lutron - AYLV-600P
- Lutron - MAELV-601
- Leviton - AWRMG-EAW
- Lutron - N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.