


ASSEMBLY INSTRUCTION

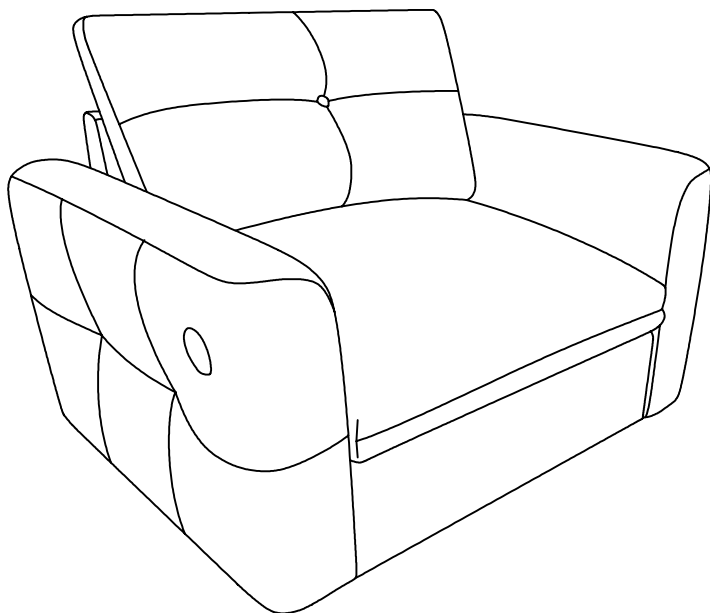

Sets often ship in multiple boxes and delivery date may vary.

CUSTOMER SERVICE

Questions, Missing parts, Assembly help?

No need to return the product, we will gladly help and ship your replacement parts free of charge.

PRE-ASSEMBLY INFORMATION

Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

NOTICE

1. Please assemble it AFTER all boxes are received.
2. Please do not throw away any of the packages or the instruction until the sofa is fully assembled.
3. Please keep children away from the plastic bags or any small pieces of stuff.
4. Some key parts of our product may be stored and hidden inside of other parts. Please open any zippered or hook & loop storage compartments to take out all parts.
5. Please do not open the compressed packages until your sofa frame is completely assembled.
6. As the cushions are all vacuum compressed, there will be some wrinkles. Please give them up to 72 hours to reach its original size and the wrinkles will basically disappear.
7. DO NOT INSTALL THE SCREWS ALL THE WAY IN THE BEGINNING. Place each screw into their proper hole and use your hand to twist the screw halfway. Twist all the screws in halfway to ensure the holes will match up properly and the product is level on the ground. When everything seems fitted, then tighten the screws.
8. Do not over tighten screws and bolts to avoid stripping.



2 adults recommended




Takes about 1.5 Hours to assemble




Weight capacity of each seat: 330LBS

COMPONENTS

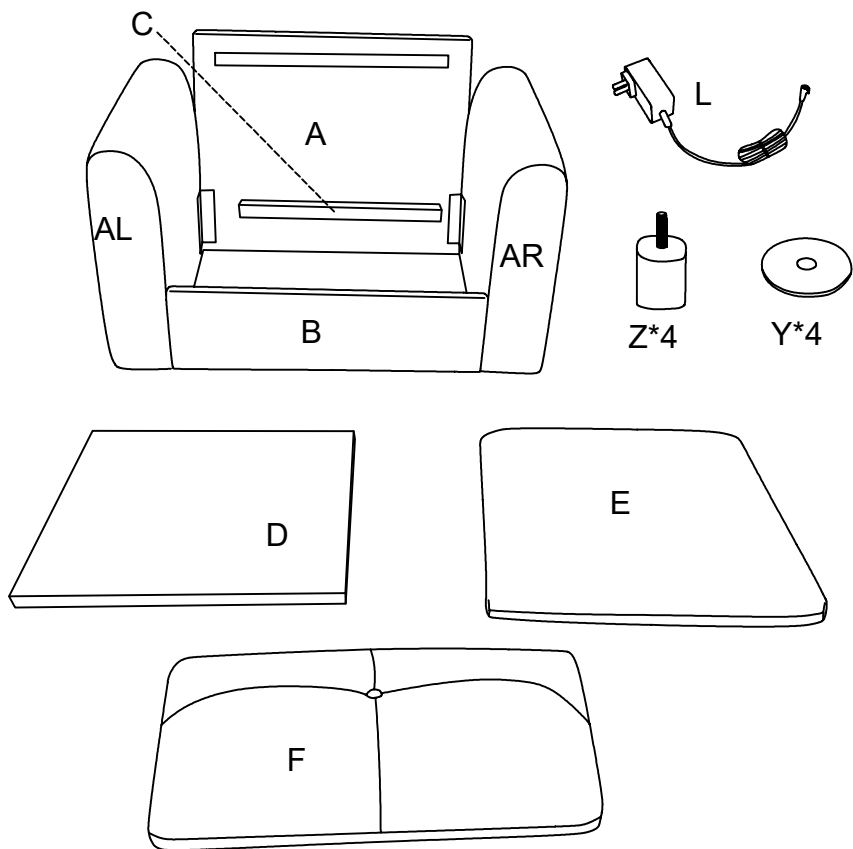

HARDWARE			
NO	DESCRIPTION	SKETCH	QTY
①	Hinges		4
②	Screws M6*15MM		18
③	Screws M6*40MM		4
④	Wrench		1

COMPONENTS

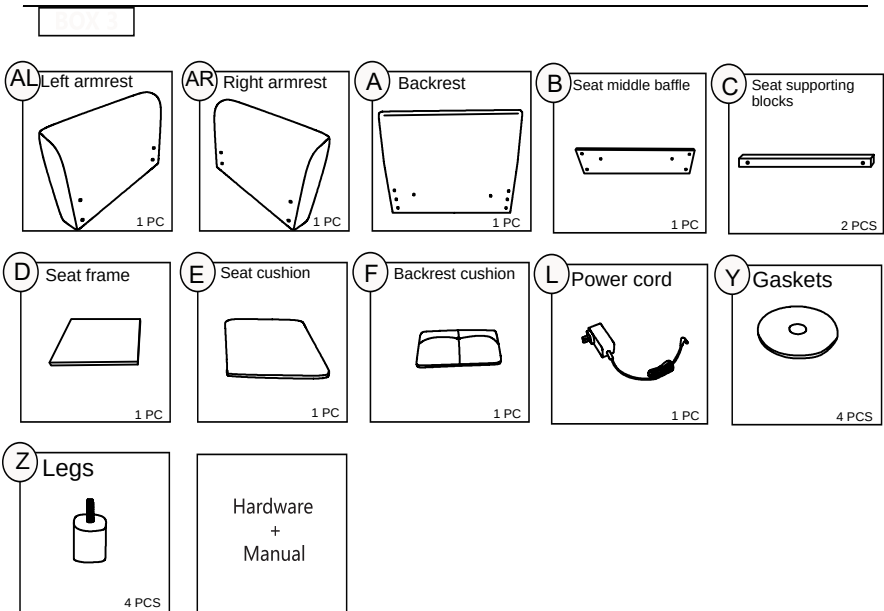


ASSEMBLY STEPS

STEP 1 Use screws 6*15mm ② to link hinges ① to backrest (A), then tighten the screws with a wrench ④.

① × 2



② × 6

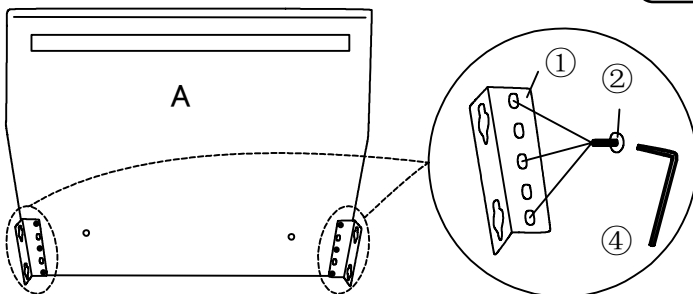


STEP 2 Use screws 6*15mm ② to link hinges① to seat middle baffle(B), then tighten the screws with a wrench④.

① × 2




② × 4

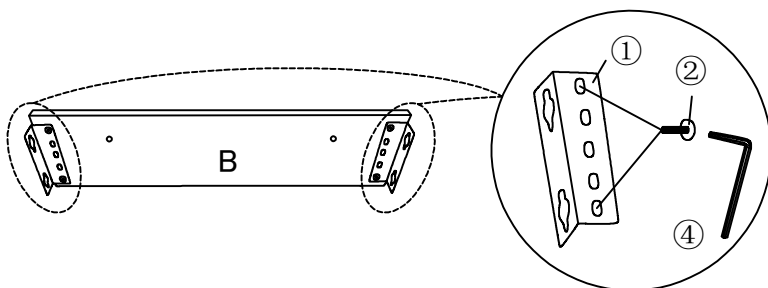


STEP 3 Please tighten the screws 6*15mm ② screw to about 30% on the left armrest(AL) and right armrest (AR).

② × 8

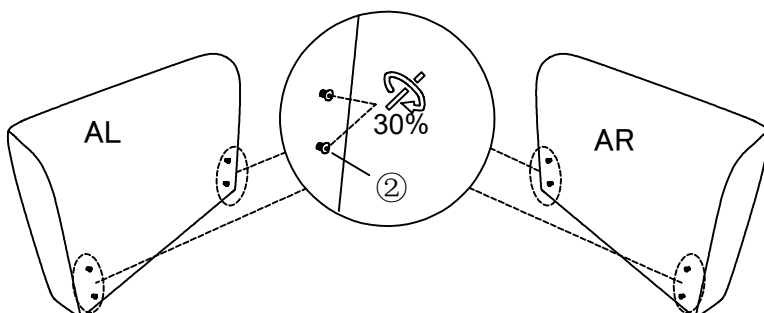


STEP 4 Hang backrest(A) on the left armrest(AL) and right armrest(AR) then tighten the screws on the armrests by a wrench④.

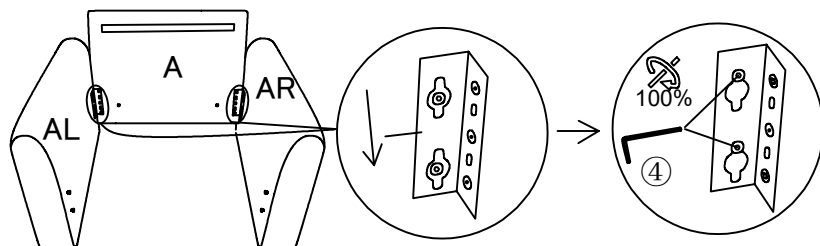


STEP 5

Use screws 6*40mm ③ to link seat supporting block (C) to backrest(A), then tighten the screws with a wrench ④.

③ × 2 

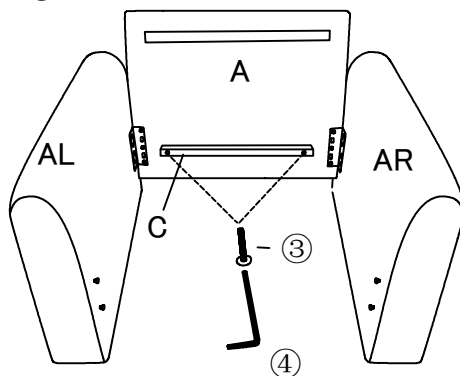
**STEP 6**

Hang seat middle baffle(B) on the left armrest(AL) and right armrest (AR), then tighten the screws on the armrests by a wrench ④.

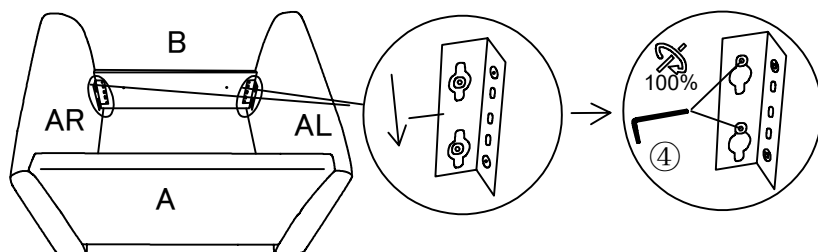**STEP 7**

Use screws 6*40mm ③ to link seat supporting block (C) to seat middle baffle(B), then tighten the screws with a wrench ④.

③ × 2 

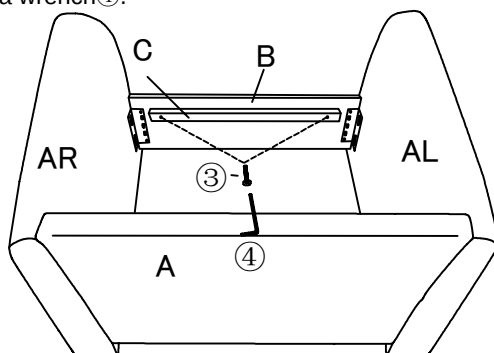


STEP 8 Attach legs(Z) and gaskets(Y) to the seat.


Y × 4



Z × 4

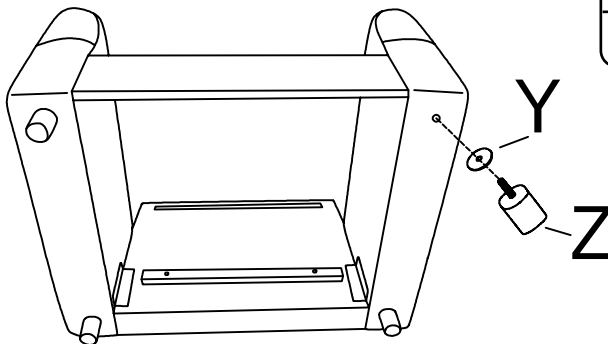

STEP 9 Place seat frame (D) on the top of the seat frame.

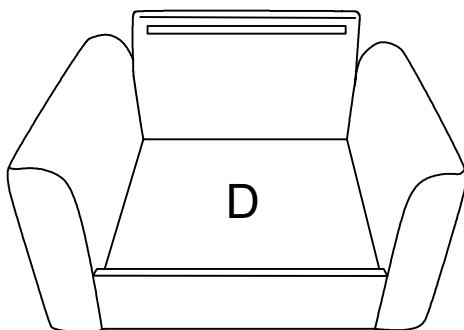

STEP 10 Open the vacuum bag and take the backrest cushion(F), seat cushion(E) out. To restore the original shape, follow the steps below.



Open the vacuum bag carefully.



Press and tap with both hands from the side to fully inhale air



Press and tap with both hands from the front to fully inhale.




Carefully smooth out each section until the surface is even.

After packing up, place them in somewhere dry and ventilated. After about 72-96 hours. It can be restored to the best use condition.

STEP 11 Put the cushions on the sofa

Link power cord (L).

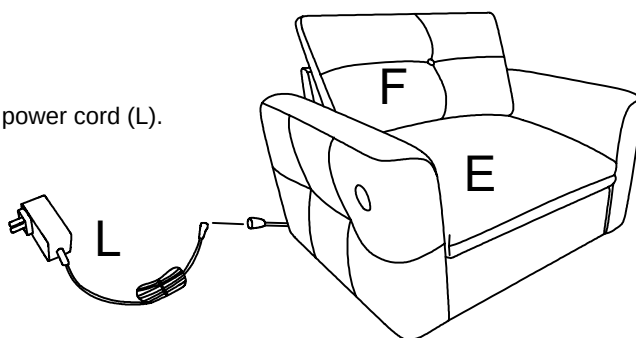

STEP 12 Complete

